



PW-101 Passive Infrared Wall Switch Occupancy Sensor

High sensitivity and dense coverage for exceptional performance

Includes neutral wire to meet NEC 2011 code

Color-matched lens and low profile for appealing design



Selectable operation, walk-through, test and presentation modes for increased energy savings and convenience

Defaults to Manual-ON operation for maximum energy savings

PROJECT
LOCATION/TYPE

Product Overview

Description

The PW-101 passive infrared (PIR) wall switch sensor can turn lights OFF and ON based on occupancy. It is characterized by high sensitivity to small and large movements, appealing aesthetics, and a variety of features.

Operation

The PW-101 replaces existing wall switches and fits in a single gang junction box. It uses advanced PIR technology to detect occupancy and keep lighting ON when it is needed. Once the space is vacated and the time delay elapses, lights automatically turn OFF. DIP switch settings allow for a variety of control options such as Auto-ON operation, walk-through and test modes.

Manual-on Control

Factory default operation is for Manual-ON, so that users turn lights on only when needed. This control strategy is proven to save more energy than Auto-ON, and is in ASHRAE 90.1-2010. If desired, the PW-101 may be reconfigured to turn lights on automatically.

Applications

The PW-101 sensor is well suited for small, enclosed spaces with clear line of sight of the occupant. Common applications include small office, small conference room and lunch/break rooms.

Features

- Detection Signature Processing eliminates false triggers and provides immunity to RFI and EMI
- Zero-crossing for long relay life
- Vandal resistant lens combines precise coverage with durability
- Choice of Manual-ON or Auto-ON operation
- Selectable walk-through mode turns lights off three minutes after the room is initially occupied if no motion is detected after the first 30 seconds
- Test mode allows quick and easy adjustments
- Selectable audible and/or visual alerts for impending shutoff
- In automatic mode, sensor returns automatically to Auto-ON after lights are turned off manually; ideal for presentations
- LED indicates occupancy detection
- Optional light level sensing with simple setup
- Service mode allows sensor to operate as a service switch in the unlikely event of a failure
- Neutral required to meet NEC 2011 code
- Sensor coverage tested to NEMA Guide Publication WD 7-2000
- Compatible with decorator wall plates




Specifications

- PW-101: 120/277 VAC; 50/60 Hz
@ 120 VAC, 0-800 W ballast or tungsten, 1/6 hp
@ 277 VAC, 0-1200 W ballast
- Time delays: 5, 10, 15, 20, 25 or 30 minutes, walk-through, test-mode
- Coverage: Major motion 35' x 30'
Minor motion 20' x 15'
- Sensitivity adjustment: PIR (high/low)
- Dimensions: 2.73" x 1.76" x 1.83"
(69.3mm x 44.7mm x 46.5mm) L x W x D
- UL and cUL listed
- Five year warranty

Controls & Settings

Product Controls

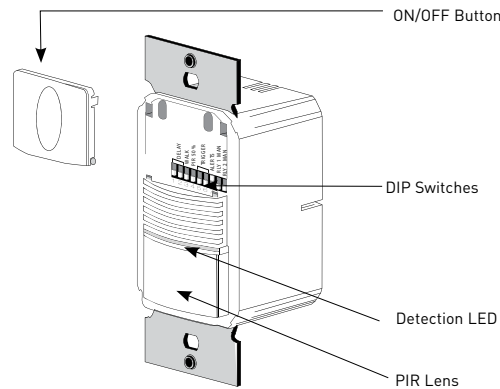

DIP Switch Settings

Time Delay	1	2	3
Test	↓	↓	↓
5 minutes	↓	↓	↓
10 minutes	↑	↑	↑
15 minutes	↑	↑	↑
20 minutes	↑	↑	↑
25 minutes	↑	↑	↑
30 minutes	↑	↑	↑
Service	↑	↑	↑

Walk-Through	4
Disabled	↓
Enabled	↑

Audible Alert	7
Disabled	↓
Enabled	↑

PIR Sensitivity	5
High	↓
Low, 50%	↑

Visible Alert	6
Disabled	↓
Enabled	↑


ON Mode	8
Auto On	↓
Manual On	↑

Switch 9 is not used
↑=ON ↓=OFF
◀=Factory Setting


Service bypasses occupancy & light level functions. Control the load manually using ON/OFF button.

Coverage & Wiring

Coverage Pattern

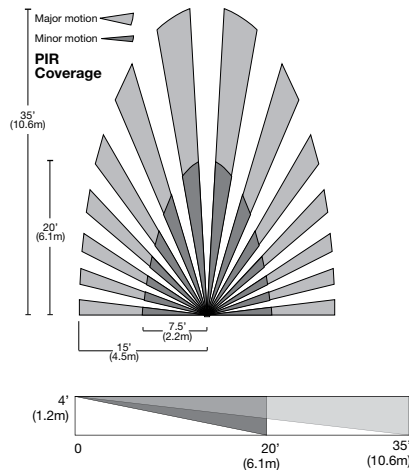

Wiring Diagrams

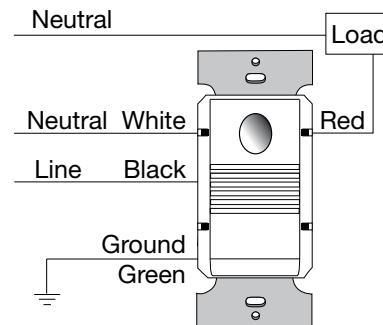

For best performance, WattStopper recommends using this sensor in spaces no larger than 15' x 12'.

Ordering Information

Catalog No.	Color	Voltage	Load Rating
<input type="checkbox"/> PW-101-W	White	120/277 VAC; 50/60 Hz 3-wire sensor; requires neutral connection	@ 120 VAC, 0-800 W ballast or tungsten, 1/6 hp @ 277 VAC, 0-1200 W ballast
<input type="checkbox"/> PW-101-LA	Lt. Almond		
<input type="checkbox"/> PW-101-I	Ivory		
<input type="checkbox"/> PW-101-G	Grey		
<input type="checkbox"/> PW-101-B	Black		

Order wall plate separately.