

ProSpec Contributes to LEED Project Points

Sustainability

Our Commitment

ProSpec has an ongoing commitment to minimize the impact on the environment in which our customers, employees and other stakeholders live and work.

We focus on conducting business responsibly, which means:

- Minimizing waste
- Following energy conservation guidelines
- Developing low or non-VOC emitting products and products that contain recycled content
- Locating manufacturing facilities convenient to our customers
- Ensuring a safe, accident-free workplace, providing ongoing training and workforce development and serving our communities

Understanding LEED

FAQs

What is LEED?

Leadership in Energy and Environmental Design (LEED) is a rating system developed by the U.S. Green Building Council (USGBC) to help define green building standards.

Are ProSpec products LEED certified?

While ProSpec products contribute to points required to achieve LEED certification, LEED applies to construction projects, not products. Construction projects are eligible for certification from the USGBC based on the number of points they receive from the products used in the construction process and the construction methods used.

How many points can I get for using your products?

ProSpec products qualify for up to 5 points. To determine the number of points a specific product provides, please contact ProSpec Technical Service at 1.800.334.0784.

In what areas do your products qualify for points?

ProSpec products qualify for points in three major areas:

1. Low-emitting materials that contribute to indoor environmental quality
2. Post-consumer recycled content
3. Regional materials, including local manufacturing and the use of raw materials from within 500 miles of the manufacturing site

Regional manufacturing locations greatly contribute to LEED points. How many manufacturing locations do you have that can help contribute to LEED?


ProSpec products are manufactured at 9 locations throughout the United States, ensuring that most products will be manufactured within 500 miles of your project site.



Reference Guide for LEED Credits

| | AREA | CREDIT | POINTS | REQUIREMENTS |
|------------------------------|------------------------|--------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATERIALS RESOURCES | Recycled content | MR 4.1 | 1 | <ul style="list-style-type: none"> 10% of building materials must be recycled material based on the cost of total value of the materials in the project. Recycled material content is the sum of post-consumer content and one-half of the pre-consumer content. |
| | | MR 4.2 | 1 | (In addition to MR 4.1): <ul style="list-style-type: none"> 20% of building materials must be recycled material based on the cost of total value of the materials in the project. Recycled material content is the sum of post-consumer content and one-half of the pre-consumer content. |
| | Regional Materials | MR 5.1 | 1 | <ul style="list-style-type: none"> 10% (based on cost) of building materials extracted, harvested, recovered and manufactured regionally, within 500 miles of the project. |
| | | MR 5.2 | 1 | <ul style="list-style-type: none"> 20% (based on cost) of building materials extracted, harvested, recovered and manufactured regionally, within 500 miles of the project. |
| INDOOR ENVIRONMENTAL QUALITY | Low-emitting Materials | EQ 4.1 | 1 | <ul style="list-style-type: none"> Low-Emitting Materials for adhesives, sealants, paints, composite wood products, and carpet systems. VOC limit is 65 g/l for tile adhesives, 100 g/l for wood flooring adhesives and 70 g/l for multi-purpose construction adhesives |

ProSpec Manufacturing / Shipping Locations

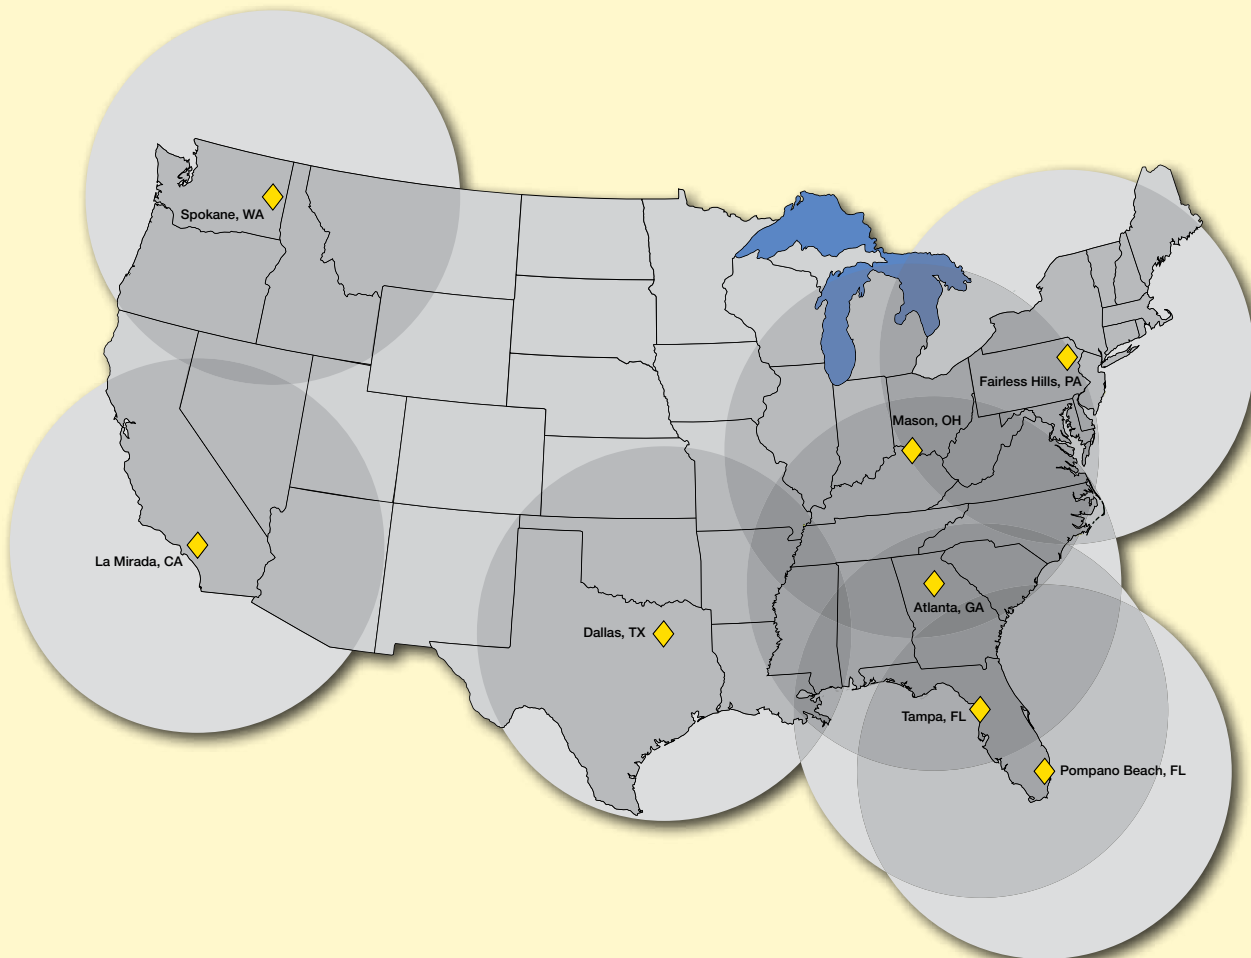

Concrete Repair Product Reference Guide for LEED Credits

| CATEGORY | PROSPEC PRODUCT | MATERIALS & RESOURCES | | | | INDOOR ENVIRONMENTAL QUALITY |
|--------------------------------------------------|--------------------------------|-----------------------|--------|---------------------|--------|------------------------------|
| | | Recycled Content | | Regional Materials* | | Low-emitting materials |
| | | MR 4.1 | MR 4.2 | MR 5.1 | MR 5.2 | EQ 4.1 |
| Underlayments & Toppings | Level Set 100 | | | • | • | • |
| | Level Set 200 | | | • | • | • |
| | Level Set 300 | | | • | • | • |
| | Level Set LW-60 | • | • | • | • | • |
| | Level Set Deep Pour 3 | | | • | • | • |
| | Level Set Wear Topping (white) | | | • | • | • |
| | Level Set Wear Topping (gray) | | | • | • | • |
| | Trowel Grade Underlayment | | | • | • | • |
| | Feather Patch | • | | | | • |
| | Floor Patch Pro | | | • | • | • |
| Construction Grouts | F-77 Construction Grout | | | • | • | • |
| | High Strength Precision Grout | | | • | • | • |
| | Precast Mortar Grout | | | • | • | • |
| | Slab Dowel Grout | | | • | • | • |
| | Commercial Anchor Cement | | | • | • | • |
| Concrete Restoration & Repair | Vinyl Concrete Patch | | | • | • | • |
| | Premium Patch 100 | | | • | • | • |
| | Premium Patch 200 | | | • | • | • |
| | Magna 100 | | | • | • | • |
| | Metro Mix 240 | | | • | • | • |
| | Metro Mix 240 AE | | | • | • | • |
| | VO Repair Mortar | | | • | • | • |
| | Vertical Leveling Mortar | | | • | • | • |
| Instant Hydraulic Cement | | | • | • | • | |
| Concrete Resurfacing & Rehabilitation | CR - Concrete Resurfacer | | | • | • | • |
| | Feather Edge | • | | • | • | • |
| | Floor Patch | | | • | • | • |
| | RubCrete | • | | • | • | • |
| | BlendCrete | | | • | • | • |
| Masonry Mortar & Grout | Surface Bonding Cement | | | • | • | • |
| | Historic Stucco Mix | | | • | • | • |
| | Historic Pointing Mortar | | | • | • | • |
| Dampproofing/Waterproofing | Sure-Coat | | | • | • | • |
| Special Coatings | Rebar Coat | | | • | • | • |
| Primers & Bonding Agents | 118 Primer | | | • | • | • |
| | Acrylic Additive | | | • | • | • |
| | Level Set Primer | | | • | • | • |
| | Level Set Primer Plus | | | | | • |
| Shotcrete | Shotcrete 300 | | | • | • | • |

NOTE: ProSpec products may contribute to up to five LEED points. For assistance in determining the number of credits ProSpec products will contribute to your project, please contact ProSpec Technical Services at 1.800.334.0784.

Tile Installation Product Reference Guide for LEED Credits

| CATEGORY | PROSPEC PRODUCT | MATERIALS & RESOURCES | | | | INDOOR ENVIRONMENTAL QUALITY |
|-------------------------------------------|--------------------------------------------|-------------------------------|--------|---------------------|--------|------------------------------|
| | | Recycled Content | | Regional Materials* | | Low-emitting materials |
| | | MR 4.1 | MR 4.2 | MR 5.1 | MR 5.2 | EQ 4.1 |
| Grouts | Sanded Tile Grout (700) | | | • | • | • |
| | Unsanded Tile Grout (800) | | | • | • | • |
| Thin Set Mortars | Permalastic System | | | • | • | • |
| | Permalastic Rapid System | | | • | • | • |
| | Superior PermaFlex 600 | | | • | • | • |
| | PermaFlex 500 | | | • | • | • |
| | PermaFlex 400 | | | • | • | • |
| | PermaFlex 300 | | | • | • | • |
| | PermaSet 275 | | | • | • | • |
| | PermaSet 200 | | | • | • | • |
| | StayFlex 590 | | | • | • | • |
| | Quick PermaFlex 570 | | | • | • | • |
| | Medium Bed PermaFlex 550 | | | • | • | • |
| | PermaFlex Lite 525 | • | • | • | • | • |
| | Adhesives | B-4050 Multi-Purpose Adhesive | | | • | • |
| B-2000 Wall & Floor Adhesive | | | | • | • | |
| B-1000 Ceramic Tile Wall & Floor Adhesive | | | | • | • | |
| Epoxies | B-7000 Epoxy | | | • | • | |
| | B-150 Epoxy | | | • | • | |
| Additives | B-730 Grout/Mortar Additive | | | • | • | • |
| | B-710 SBR Mortar Additive | | | • | • | • |
| Surface Preparation | Level Set 100 | | | • | • | • |
| | Level Set 200 | | | • | • | • |
| | Level Set 300 | | | • | • | • |
| | Level Set LW-60 | • | • | • | • | • |
| | Feather Edge | • | | • | • | • |
| | Trowel Grade Underlayment | | | • | • | • |
| | Floor Patch Pro | | | • | • | • |
| | Floor Mud | | | • | • | • |
| | Wall Mud | | | • | • | • |
| | Wall Float | | | • | • | • |
| | Level Set Primer | | | • | • | • |
| Waterproofing/Crack Isolation | Level Set Primer Plus | | | | | • |
| | B-6000 Waterproof/Crack Isolation Membrane | | | • | • | • |
| | Flex-Guard | | | • | • | • |
| Cleaners/Sealers | Speed-Flex | | | • | • | • |
| | Grout Haze Remover | | | | | |
| | Epoxy Haze Remover | | | | | |
| | Grout Sealer | | | | | |

NOTE: ProSpec products may contribute to up to five LEED points. For assistance in determining the number of credits ProSpec products will contribute to your project, please contact ProSpec Technical Services at 1.800.334.0784.