

# NEVER-SEEZ<sup>®</sup>


## ANTI-SEIZE & LUBRICATING COMPOUND




EARTH BORING



AGRICULTURE

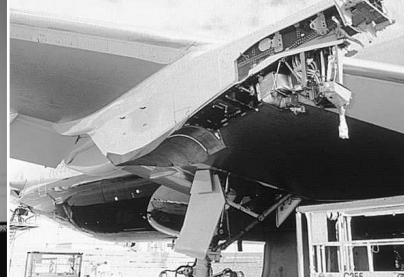

AIRCRAFT

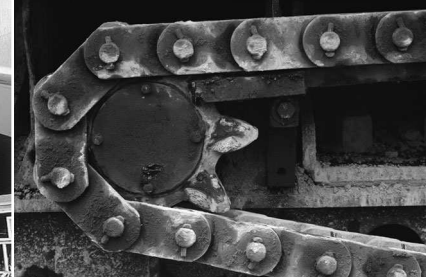

HEAVY EQUIPMENT



FOOD PROCESSING



PETRO-CHEMICAL



VALVE ASSEMBLY



MINING



OIL EXPLORATION



STEEL FOUNDRY



POWER GENERATION



LOGGING & TRANSPORTATION

# NEVER-SEEZ

from Bostik Findley is the recognized brand leader in anti-seize compounds and lubricants. It's the one name industry professionals trust for high quality and superior performance in all types of applications. Never-Seez anti-seize and lubricating compounds help maintain a positive seal, making for easier disassembly of flanges and allowing one-piece gasket removal.

From high temperature flanges in power and steel plants, refineries, or dryer sections; to corrosive and acidic environments; to sealing around duct work and equipment; to bonding and adhering all types of metal, wood, plastics and rubber, Bostik Findley has the solution.

The Bostik Findley line of products for MRO applications also includes adhesives and sealants in a variety of formulations, applicators and container sizes for on-the-job convenience and ease of use.

To find the product that's right for your working environment, refer to the product information and helpful selector guides in this catalog. For more technical information on any product, contact Bostik Findley at 1-888-603-8558.

## NEVER-SEEZ® PRODUCTS

Anti-Seize Compounds . . . . . Page 2  
Specialized Lubricating Greases . . . . . Page 3

NEVER-SEEZ PRODUCTS TYPICAL PROPERTIES CHART . . . . . Pages 4-5

NEVER-SEEZ PRODUCT CATALOG NUMBERS . . . . . Page 5

## INDUSTRY USE GUIDE

Regular Grade . . . . . Page 6  
Nickel Special . . . . . Page 6  
Nickel Special, Nuclear Grade . . . . . Page 6  
Marine Grade . . . . . Page 6  
Blue Moly . . . . . Page 6  
White Food Grade with PTFE . . . . . Page 6  
Red Bearing Lubricant . . . . . Page 6  
Black Moly . . . . . Page 6  
Pipe Compound with TFE . . . . . Page 6  
High Temperature Bearing Lubricant . . . . . Page 6  
High Temperature Stainless . . . . . Page 6  
High Temperature Stainless Nuclear Grade . . . . . Page 6

## BOSTIK® LUBRICANTS

Woodworking Lubricants . . . . . Page 7

BOSTIK FINDLEY® PRODUCTS . . . . . Page 8

## NEVER-SEEZ® ANTI-SEIZE & LUBRICATING COMPOUNDS

Never-Seez compounds provide protection in a lot of ways. Properly applied, they provide a fine, protective film that doesn't burn off or wash off in salt or fresh water. Each Never-Seez product is formulated to work in a specific, critical environment.

### REGULAR GRADE

The "original" anti-seize compound and extreme pressure lubricant formulated with copper, graphite, aluminum and other ingredients to protect metal parts against rust, corrosion and seizure up to 1800°F. Fine metallic and graphite particles in special grease protect parts even in high heat, high pressure and corrosive environments. Ford ESE-M12A4-A, Garrett Engine Div. PCS5724, Pratt & Whitney PWA 360523-2 and tested to MIL-A-907.

#### PRODUCT APPLICATIONS:

- Nuts, bolts, screws
- Pipe fittings
- Boom guides
- Valve assemblies
- Pump mountings
- Chain drives
- Shafts
- Gaskets
- Press fit assemblies
- Taps and drills
- Packaging glands
- Metal fittings
- Machinery

### PURE NICKEL SPECIAL

A nickel and graphite based anti-seize compound formulated to protect up to 2400°F against seizure and galling, galvanic and severe environmental corrosion. Never-Seez Pure Nickel Special is a superior, high temperature anti-seize and



extreme pressure lubricant. It contains flake particles of pure nickel, graphite and other additives in a special grease carrier found to enhance anti-seize performance. This product is recommended for use when applications prohibit the presence of copper, especially when resistance to corrosive acidic and caustic solutions is required. Meets Boeing BAC 5008, Ford ESE-M12A4-A, Garrett Engine Div. PCS5721, GE Aircraft A50TF198 Class A, General Motors 14001899, Pratt & Whitney PWA 36053-1 and is tested to MIL-A-907.

#### PRODUCT APPLICATIONS:

- Fittings, fasteners exposed to high temperatures in steel mills and power plants
- Stainless steel pipe fittings, flanges, pump fittings
- Fasteners in exhaust manifolds and boilers
- Steam generators
- Assembly of dissimilar metals

### HIGH TEMPERATURE STAINLESS

A stainless steel, graphite, aluminum based anti-seize compound formulated to protect up to 2200°F against seizure and galling, galvanic and severe environmental corrosion. It was specifically designed for applications that cannot use nickel based products.

Tested to MIL-A-907.

#### PRODUCT APPLICATIONS:

- Fasteners in steel mills and power plants
- Stainless steel pipe fittings, flanges, pump fittings and unions
- Fasteners in exhaust manifolds
- Reactor bolts
- Turbine bolts
- Gauges and fittings

### MARINE GRADE

This unique product prevents rust, galling and galvanic corrosion in salt water, salt air and high-moisture environments. It is a proven combination of copper flakes, graphite, and aluminum paste suspended in grease specially formulated for marine applications to protect up to 1800°F. This product was developed from years of experience working with marine engineers to provide superior parts protection in applications exposed to salt water. Never-Seez Marine Grade is the best choice for protection both above and below the water line. Tested to MIL-A-907.

#### PRODUCT APPLICATIONS:

- Bilge piping
- Water pump gaskets and flanges
- Screw shafts
- Prop shaft bearing housings
- Winches, cables, and anchor chains
- Hatch covers
- Porthole studs
- Rigging and hoist cables

### NICKEL NUCLEAR GRADE

The standard in the nuclear industry, Nickel Nuclear Grade Never-Seez is specially tested and certified pure for use in nuclear power plants. Each production lot of Nuclear Grade Never-Seez is tested for contaminants of sulfur, halogens and low-melt metals and each container is labeled with the lot number that certifies purity. Recommended for nuclear fittings, valves and steam manifolds. Provides maximum protection from high heat up to 2400°F and aggressive chemicals. Meets General Electric D50YP12, Westinghouse and Bechtel's nuclear specifications. Tested to MIL-A-907.



Teflon® is a Registered Trademark of DuPont.

# Anti-Seize & Lubricating Compounds

## PRODUCT APPLICATIONS:

- Fittings, fasteners exposed to high temperatures in steel mills, power plants and nuclear plants
- Stainless steel pipe fittings, flanges, pump fittings
- Fasteners in exhaust manifolds and boilers
- Steam generators
- Assembly of dissimilar metals

## HIGH TEMPERATURE STAINLESS NUCLEAR GRADE

This premium grade anti-seize was developed in conjunction with Electricite de France (EDF) and meets General Electric specification D50YP12, Westinghouse and Bectel's nuclear specifications. Protects nuclear components from seizure and galling at temperatures up to 2200°F. Each production lot of Nuclear Grade Never-Seez is tested for contaminants of sulfur, halogens and low-melt metals and each container is labeled with the lot number that certifies purity. Tested to MIL-A-907.

## PRODUCT APPLICATIONS:

- Fasteners in steel mills, power plants and nuclear plants
- Stainless steel pipe fittings, flanges, pump fittings and unions
- Fasteners in exhaust manifolds
- Reactor bolts
- Turbine bolts
- Gauges and fittings

## SPECIALIZED LUBRICATING GREASES




## PIPE COMPOUND WITH TEFLON®

Premium pipe and fitting lubricant and anti-seize compound formulated to provide maximum thread lubrication in a wide range of pipe threads and fittings. The use of Teflon, and other sealant enhancing additives in

Never-Seez Pipe Compound, allows greater thread engagement and more positive sealing. This product prevents corrosion and galling of threads for easy disassembly at temperatures up to 525°F. Recommended for use on black iron, galvanized stainless steel, and high pressure steam pipes in contact with malleable cast iron, brass, stainless steel and galvanized fittings.

## PRODUCT APPLICATIONS:

- Water lines, non-potable
- Sewerage and irrigation piping
- Steam pipe fittings
- Hydraulic lines and fittings
- Pneumatic systems
- Natural and propane gas lines

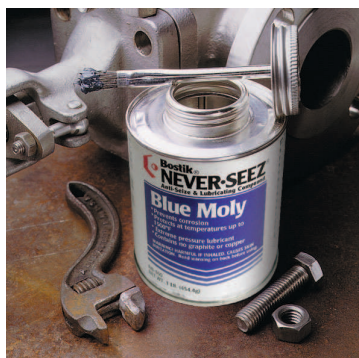

## BLUE MOLY

Never-Seez Blue Moly lubricant is designed for industrial applications requiring non-destructive assembly and disassembly where combinations of high loads, high temperatures and low speeds are encountered to reduce friction during the assembly of press-fit components. This multi-purpose extreme pressure anti-seize lubricant contains a high concentration of molybdenum disulfide. Especially effective under extreme pressures involving heavy loads and slow speed resulting in boundary lubrication conditions, Never-Seez Blue Moly withstands pressures to 300,000 psi and temperatures up to 1500°F.

## PRODUCT APPLICATIONS:

- Metal fittings
- Aircraft components
- Valves
- Stainless steel fasteners and slow moving parts
- Automotive engine bolts and body fasteners
- Stainless steel flange and pump bolts
- Chemical processing machinery
- Gasket dressing
- Assembly of dissimilar metals

## WHITE FOOD GRADE WITH PTFE

Meets FDA and USDA requirements for incidental food contact. Fortified with high load carrying solid lubricants, it lubricates and protects bearings, gears and other moving parts exposed to high temperatures up to 475°F and wash downs. The unique dispersion of FDA authorized PTFE provides additional lubricity especially where a thin film of lubricant is desirable. Never-Seez White Food Grade with PTFE is virtually odorless, colorless, and tasteless. It is a "multi-purpose" lubricant for varied services within a food handling plant.

## PRODUCT APPLICATIONS:

- Nuts, bolts, screws
- Pipe fittings
- Stainless steel fittings
- Valve stems and assemblies
- Pump gears
- Chain drives
- Gaskets
- Press fit assemblies
- Conveyor and oven bearings
- Packaging Machinery
- Worm gears
- Slow speed or highly loaded bearings <500 RPM

## BLACK MOLY

A high percentage of lubricious molybdenum disulfide in a premium grease provides ultimate protection for component assembly and roller bearings exposed to extreme pressure, high temperature and slow operating speeds. Withstands up to 500,000 psi and temperatures up to 750°F.

## PRODUCT APPLICATIONS:

- Press fit assemblies
- Equipment break-in
- Machine tool parts
- Highly loaded bearings <500 RPM
- Hot exhaust fans
- Adjusting screws
- Screw jacks
- Crushing mills
- Steel forming gates and slides

## RED BEARING LUBRICANT

Never-Seez Red Bearing Lubricant is a special formulation of polyurea thickened grease and rust inhibitors that work to provide maximum bearing life. Superior in performance to soap thickened grease, Red Bearing Lubricant has 70% longer life than commercial lubricants as well as temperature resistance to 350°F continuous service and

400°F intermittent. It also shows excellent structural stability and maintains its consistency better than competitive greases under severe operating conditions such as encountered in an over packed bearing. Red Bearing Lubricant does not thin out in the presence of water and resists water washout, mild acid and alkaline solutions.

## PRODUCT APPLICATIONS:

- High and low speed bearings
- Pre-lubricated and "seal-for-life" bearings
- Universal joints
- CV joints
- Wheel bearings
- Train wheel block bearings
- Tunnel augering equipment
- For "quiet" bearings per manufacturers' requirements
- Speed factors (n•dm) up to 400,000

## HIGH TEMPERATURE BEARING LUBRICANT

Never-Seez High Temperature Bearing Lubricant is an exclusive combination of a specially formulated high temperature grease and lubricating enhancers that provide long lasting lubrication at temperatures between 500°F and 1000°F. High Temperature Bearing Lubricant is recommended for ball and roller bearings, bushings, open and sealed bearings.

## PRODUCT APPLICATIONS:

- Process oven bearings
- Heat treat ovens and furnaces
- Kiln ovens and casters
- Oven damper controls
- High temperature exhaust fans


## LITHIUM EP GREASE

A multi-purpose lubricant for maximum protection of highly stressed mechanical components in a wide range of operating temperatures. This NLGI 2 product offers extreme pressure performance, high load protection and corrosion resistance. A medium viscosity base oil with lithium soap thickener, it offers superior lubricating properties at low to moderate speeds, in temperatures from 10°F to 250°F.

## PRODUCT APPLICATIONS:

- Wheel bearings, chassis points, universal and ball joints on highway, off-highway and farm equipment
- Heavy load mills, presses, crushers

# NEVER-SEEZ® Anti-Seize & Lubricating Compounds

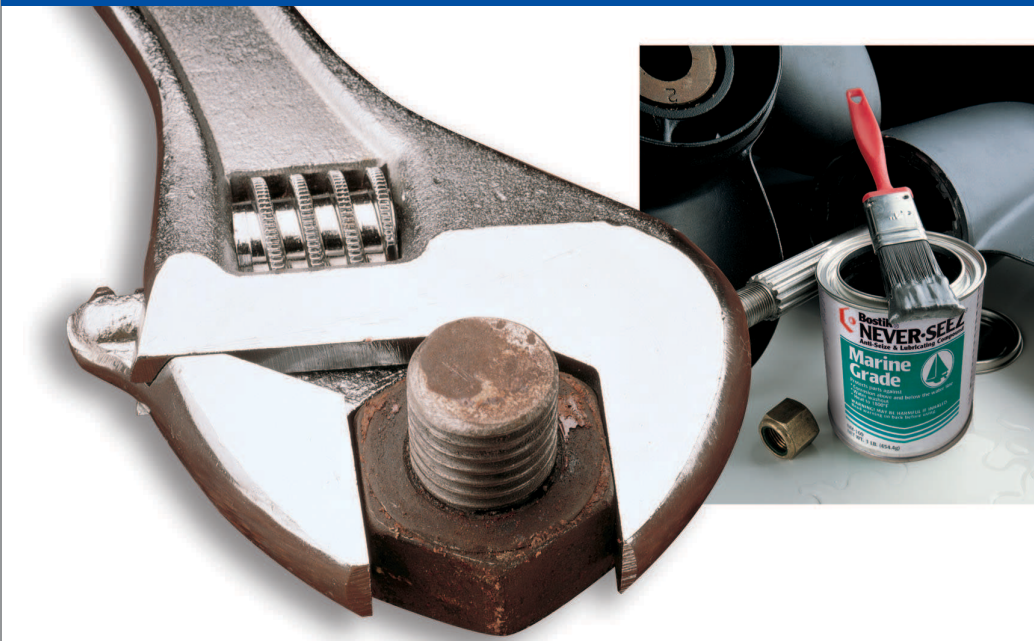

## Typical Properties

PRODUCT	TEMPERATURE RESISTANCE	PARTICLE SIZE	DENSITY (G/CM <sup>3</sup> )	ASTM D-217 WORKED PENETRATION	ASTM D-92 FLASH POINT	ASTM D-566/ DROPPING POINT
<b>REGULAR GRADE</b>	-297° to 1800°F (-183° to 982°C)	2 mil. maximum (50 microns)	1.19 to 1.29	280-350	>482°F (250°C)	360°F (182°C)
<b>PURE NICKEL SPECIAL &amp; NUCLEAR GRADE</b>	-297° to 2400°F (-183° to 1315°C)	2 mil. maximum (50 microns)	1.28 to 1.32	300-350	>482°F (250°C)	360°F (182°C)
<b>HIGH TEMP. STAINLESS &amp; HIGH TEMP. STAINLESS NUCLEAR GRADE</b>	-297° to 2200°F (-183° to 1204°C)	2 mil. maximum (50 microns)	1.23 to 1.29	300-350	>482°F (250°C)	350°F (177°C)
<b>MARINE GRADE</b>	-200° to 1800°F (-129° to 982°C)	2 mil. maximum (50 microns)	1.24 to 1.32	300-350	>482°F (250°C)	460°F (238°C)
<b>PIPE COMPOUND WITH TEFLON®</b>	10° to 525°F (-12° to 274°C)	2 mil. maximum (50 microns)	1.14 to 1.22	300-350	>482°F (250°C)	388°F (198°C)
<b>BLUE MOLY</b>	-150° to 1500°F (-101° to 815°C)	2 mil. maximum (50 microns)	1.14 to 1.20	300-350	>482°F (250°C)	360°F (182°C)
<b>WHITE FOOD GRADE WITH PTFE</b>	5° to 475°F (-15° to 246°C)	2 mil. maximum (50 microns)	0.9 to 1.0	275-325	>482°F (250°C)	440°F min. (227°C)
<b>BLACK MOLY</b>	10° to 750°F (-12° to 399°C)	1 mil. maximum (25 microns)	1.1 to 1.3	300-350	>482°F (250°C)	375°F (191°C)
<b>RED BEARING LUBRICANT</b>	-30° to 350°F (-34° to 177°C)	N/A	.89 to .93	290-330	>482°F (250°C)	450°F (232°C)
<b>HIGH TEMPERATURE BEARING LUBRICANT</b>	15° to 1000°F (-9° to 538°C)	1 mil. maximum (25 microns)	.90 to .94	265-335	>482°F (250°C)	Non-dropping
<b>LITHIUM EP GREASE</b>	10° to 250°F (-12° to 121°C)	N/A	.89 to .91	265-295	>482°F (250°C)	350°F (177°C)

## REGULAR GRADE

NS-10	Tube 1 oz.
NSB-4	Tube 1/4 lb.
NS-40	Flat Top 1/4 lb.
NSBT-4	Brush Top 1/4lb.
NSBT-8	Brush Top 8 oz.
NSA-16	Aerosol 16 fl.oz.
NS-160	Flat Top 1 lb.
NSBT-16	Brush Top 1 lb.
NSB-16	Bottle 1 lb.
NSC-1	Cartridge 1 lb.
NS-168	Flat Top 8 lb.
NS-42B	Pail 42 lb.
NS-130B	Drum 130 lb.
NS-425B	Drum 425 lb.

## PURE NICKEL SPECIAL

NSBT-8N	Brush Top 8 oz.
NSN-165	Flat Top 1 lb.
NSBT-16N	Brush Top 1 lb.
NSN-8	Flat Top 8 lb.
NSN-42B	Pail 42 lb.
NSN-130B	Drum 130 lb.
NSN-425B	Drum 425 lb.

## NICKEL NUCLEAR GRADE

NGBT-8	Brush Top 8 oz.
NGBT-16	Brush Top 1 lb.
NG-165	Flat Top 1 lb.
NG-4	Flat Top 4 lb.
NG-8	Flat Top 8 lb.

## HIGH TEMP. STAINLESS

NSS-160	Flat Top 1 lb.
NSSBT-8	Brush Top 8 oz.
NSSBT-16	Brush Top 1 lb.
NSS-42B	Pail 42 lb.
NSS-425B	Drum 425 lb.

## HIGH TEMP. STAINLESS NUCLEAR GRADE

NGSS-8 BT NF	Brush Top 8 oz.
NGSS-160 NF	Flat Top 1 lb.
NGSS-16 BT NF	Brush Top 1 lb.
NGSS-4NF	Flat Top 4 lb.
NGSS-8 NF	Flat Top 8 lb.
NGSS-42B NF	Pail 42 lb.

## BLUE MOLY

NBBT-8	Brush Top 8 oz.
NB-160	Flat Top 1 lb.
NBBT-16	Brush Top 1 lb.
NB-42B	Pail 42 lb.
NB-425B	Drum 425 lb.

## BLACK MOLY LUBRICANT

NSBC-1	Cartridge 14.1 oz.
NSB-150	Flat Top 1 lb.
NSB-35B	Pail 35 lb.
NSB-425B	Drum 425 lb.

## RED BEARING LUBRICANT

NSR-140	Flat Top 14 oz.
NSRC-1	Cartridge 14.1 oz.
NSR-35B	Pail 35 lb.
NSR-400B	Drum 400 lb.

## WHITE FOOD GRADE WITH PTFE

NSWT-14	Flat Top 14 oz.
NSWT-1C	Cartridge 14.1 oz.
NSWT-7	Flat Top 7 lb.
NSWT-120B	Drum 120 lb.
NSWT-400B	Drum 400 lb.

## HIGH TEMPERATURE BEARING LUBRICANT

NHTC-14	Cartridge 14.1 oz.
NHT-35B	Pail 35 lb.
NHT-120B	Drum 115 lb.
NHT-390B	Drum 390 lb.

## PIPE COMPOUND WITH TEFLON®

NPBT-4	Brush Top 1/4 lb.
NPBT-8	Brush Top 8 oz.
NPBT-16	Brush Top 1 lb.

## MARINE GRADE

NMBT-8	Brush Top 8 oz.
NM-160	Flat Top 1 lb.
NMBT-16	Brush Top 1 lb.
NM-42B	Pail 42 lb.
NM-425B	Drum 425 lb.

## LITHIUM EP GREASE

PM-210	14.1 oz.
--------	----------

TORQUE COEFFICIENT (K FACTOR)	COEFFICIENT OF FRICTION/ASTM TEST METHOD	FALEX TEST/ FAIL LOAD	FEATURES
.130	.057-.063 D-2266	750 lbs. (341 Kg)	Protects against rust, corrosion, carbon fusion and seizure at high temperatures. Keeps parts working longer with less wear, and enables faster disassembly when repairs are needed.
.158	.092 D-2266	500 lbs. (227 Kg)	Excellent heat dispersing qualities. Prevents galling on steel-to-stainless, titanium, magnesium and other hard metals.
.16	.080 D-2625A	500 lbs. (227 Kg)	Specifically designed for applications that cannot use nickel based products. Prevents seizure at high temperatures and offers excellent resistance to corrosion and galvanic action between dissimilar metals. Nuclear Grade is specifically tested for contaminants and each container is labeled with the lot number that certifies purity.
.130	.072 D-2266	750 lbs. (341 Kg)	Prevents rust, galling and galvanic corrosion in salt water, salt air, ionized water and high moisture environments. Excellent resistance to water washout.
.16	.068 D-2625A	750 lbs. (341 Kg)	Formulated to provide maximum thread lubrication and prevent galling, corrosion and seizing in a wide variety of threads and fittings. Suitable for water, natural gas, air, steam and hydraulic oils.
.150	.0824 D-2266	1000 lbs. (455 Kg)	Provides excellent protection against extreme pressure and high temperatures. Contains no graphite, lead or copper and can be used in applications where these are undesirable or prohibited.
.130	.038 D-2265A	1000 lbs. (455 Kg)	Premium quality lubricant composed entirely of ingredients which meet FDA requirements where incidental food contact is possible. It is a virtually odorless, colorless and tasteless multi-purpose lubricant for varied services within the food handling plant.
.140	.0597 D-2266	1000 lbs. (455 Kg)	Especially effective under extreme pressures involving heavy loads and low speeds resulting in boundary lubrication conditions. Black Moly withstands pressure to 500,000 psi.
N/A	.0732 D-2265A	750 lbs. (341 Kg)	A special formulation of polyurea thickened grease and rust inhibitors that work to provide maximum bearing life. Superior in performance to soap thickened grease, Red Bearing Lubricant has 70% longer shelf life than commercial lubricants.
N/A	.0703 D-2266	750 lbs. (341 Kg)	Excellent lubrication between 500°F and 1,000°F. Has no "dropping point", will not melt, and contains no metallic particles. Recommended for ball and roller bearings, bushings, open and sealed bearings.
N/A	.065 D-2625A	1000 lbs. (455 Kg)	This NLGI 2 product offers extreme pressure performance, high load protection and corrosion resistance. It offers superior lubricating properties at low and moderate speeds.



### REGULAR GRADE

Superior anti-seize, protects against rust and corrosion, excessive wear due to extreme pressure and/or high temperatures. Provides protection for easier disassembly resulting in faster repairs.

Aerospace  
Amusement park  
Aircraft  
Airport:  
Baggage handling equipment  
People moving conveyor  
Telescoping ramp  
Boat builder  
Boat yard:  
Aqua ski  
Dry dock  
Pleasure boat  
Yacht  
Bridge building and maintenance  
Chemical plant  
Construction equipment  
Construction site  
Earth drilling:  
Core sampling  
Soil exploration  
Water well  
Escalator  
Farm equipment dealer  
Farm machinery  
Fishing fleet  
Foundry  
Gas utility  
Glass manufacturer  
Heat treatment plant  
Irrigation equipment  
Kiln  
Machine tool industry  
Maintenance, general plant  
Maintenance, marine  
Metal working industry  
Military:  
Amphibious vehicles  
Personnel carriers  
Tanks  
Mining  
Offshore oil driller  
Petro-Chemical plant  
Power generating plant  
Power transmission equipment:  
Manufacturer  
Rebuilder  
User  
Pulp and paper mills  
Rolling mill  
Ship chandler  
Shipper of small packages:  
Post Office  
U.P.S.  
Shipyard:  
Freighter  
Naval  
Tanker  
Ski lift  
Skimobile  
Steel and aluminum extruders  
Steel forging plant

Steel mill  
Textile mill  
Transportation; manufacturer, rebuilder, user:

Bus  
Diesel equipment  
Gas equipment  
Motorcycle  
Outboard engine  
Railroad  
Recreational vehicle  
Trailer  
Truck with trailer  
Waste water plant  
Water utility

### NICKEL SPECIAL

Premium anti-seize recommended for use where the presence of copper is prohibited. Protects against higher temperatures, up to 2400°F and corrosive acidic and caustic environments.

Aerospace  
Aircraft  
Chemical plant  
Clay brick firing industry  
Diesel engine  
Foundry  
Gas engine  
Glass manufacturer  
Heat treatment plant  
Kiln  
Petro-Chemical plant  
Power generating plant  
Pulp and paper mills  
Rolling mill  
Stainless steel user  
Steel forger  
Steel mill  
Textile mill  
Turbine manufacturer  
Turbo charge  
Waste water plant

### NICKEL SPECIAL, NUCLEAR GRADE

The same high quality product as Nickel Special, Nuclear Grade is tested and certified for purity. For use in nuclear power plants and where specified by NRC.

### HIGH TEMPERATURE STAINLESS

Contains fine particles of stainless steel, graphite and other additives to enhance anti-seize and extreme pressure performance. It is recommended for use where the presence of nickel is prohibited.

Fasteners and Bolts:  
Steel mills  
Power plants  
Nuclear Plants  
Exhaust Manifolds  
Reactor Bolts  
Turbine Bolts  
Pipe Fittings:  
Stainless Steel Pipe  
Flanges and Unions  
Pumps and Gauges

### HIGH TEMPERATURE STAINLESS NUCLEAR GRADE

Recommended for use where the presence of nickel is prohibited. Never-Seez High Temperature Stainless

Nuclear Grade is certified pure for use in nuclear power plants.

### MARINE GRADE

For protection against salt-water, salt-air and high moisture environments, this lubricant prevents rust, galling and galvanic corrosion.

Boat builder  
Boat yard:  
Dry dock  
Pleasure boat  
Sailboat  
Yacht  
Car wash  
Fishing fleet  
Maintenance, marine  
Offshore oil equipment  
Pulp and paper mills  
Ship chandler  
Shipyard:  
Freighter  
Naval ship  
Tanker  
Ski lift  
Textile mill

### BLUE MOLY

Specially formulated for aircraft and aerospace, lubricates and protects against seizing and galling. Use where graphite, copper and lead are prohibited.

Aerospace  
Aircraft  
Electronic industry  
Military

### WHITE FOOD GRADE WITH PTFE

Multi-purpose lubricant composed entirely of ingredients approved by the FDA for incidental food contact. It is virtually odorless, tasteless and colorless.

Bakery  
Brewery  
Cosmetic packager  
Dairy food processor  
Fast food restaurant  
Fish processor  
Food handling and processing  
Ice cream producer  
Meat packing  
Pet food manufacturer  
Pharmaceutical  
Poultry processing  
Soft drink bottler

### RED BEARING LUBRICANT

"The quiet grease". This high performance grease, with rust inhibitors, has exceptional high temperature stability for maximum bearing life.

Aerospace  
Aircraft  
Amusement park  
Appliance manufacturer  
Automotive  
Bicycle manufacturer  
Circulating fan manufacturer  
Construction equipment  
Conveyor manufacturer  
Electric motor manufacturer  
Exhaust fan manufacturer  
Farm equipment  
Forklift trucks  
Golf cart manufacturer  
Maintenance, general plant

Machine tool manufacturer  
Power engineering plant  
Power transmission  
Truck and trailer

### BLACK MOLY

Withstanding pressures to 500,000 PSI and temperatures to 750°F, this lubricant provides excellent protection in areas of extreme pressure.

Aerospace  
Aircraft  
Amusement park  
Automotive  
Construction equipment  
Construction site  
Conveyor manufacturer  
Escalator  
Farm equipment  
Forklift truck:  
Manufacturer  
Rebuilder  
User  
Machine tool manufacturer  
Mining  
Power transmission equipment  
Railroad  
Steel mill  
Truck and trailer

### PIPE COMPOUND WITH PTFE

Premium quality lubricant enhanced with Teflon® and solid additives allows for greater thread engagement, and more positive sealing. As an anti-seize lubricant, it prevents corrosion and galling for easy disassembly.

Automotive  
Building construction  
Chemical processor  
Gas utility  
Hydraulic system  
Pipe and valve supplier  
Plumber and pipe fitter  
Pneumatic system  
Water utility

### HIGH TEMPERATURE BEARING LUBRICANT

High temperature grease with lubricating enhancers which provides longer lubrication at temperatures between 500°F and 1000°F

Clay firing industry  
Conveyor manufacturer  
Electric motor  
Exhaust fan manufacturer  
Foundry  
Glass manufacturer  
Heat treatment plant  
Kiln  
Oven  
Rolling mill  
Steel forger  
Steel mill



# Before You Cut It, Cote It.

Introducing the first woodworking lubricants that make faster work of rip cuts, cross cuts, angle cuts, dado cuts – and your bottom line.

**Bostik® TopCote®** features a unique fluoropolymer technology that dramatically reduces sliding friction on table saws while it repels dust, dirt, moisture and prevents corrosion. Its dry formula contains no silicone or petroleum and it will never stain wood or interfere with glues or finishes.

**Bostik® DriCote®** helps achieve cleaner, truer cuts from any blade or bits. It forms a clear, tough, micro-thin coating that greatly reduces friction and extends over-all blade life. DriCote prevents resin and pitch buildup to save time and money on blade cleanings and resharping, while increasing overall yield.

**Bostik® Bearing Lubricant** is ideal for router work on all wood and solid surfaces. It protects valuable tools even under heavy operating loads and high temperatures. Regular maintenance with Bearing Lubricant can extend bearing life far better than oil or other treatments. Use it to free up frozen bearings and seal bearings from moisture, too.



## BOSTIK TOPCOTE®

TopCote forms a durable, water-repelling dry film on saw tables and tool surfaces to reduce sliding friction and eliminate surface “hang ups.” Compared to paste wax, TopCote is 30% slicker, prevents rust longer and is easier to use.

### Benefits

- Contains no silicone
- Prevents rust 5 times longer than wax or silicone
- Lasts 3 times longer than wax

## BOSTIK DRICOTE®

Use DriCote on saw blades, drills and router bits for cleaner, straighter cuts. It forms a tough coating on metal surfaces to reduce cutting friction and resin buildup.

### Benefits

- Prevents resin and pitch buildup
- More than doubles time between resharping
- Contains no silicone

## BEARING LUBRICANT

Ideal for router work on all wood and solid surfaces, Bearing Lube protects under heavy operating loads and high temperatures up to 550°F. Regular use can extend bearing life up to 3 times.

### Benefits

- Reduces operating friction by 25%
- Extends bearing life by 3 times
- Effective twice as long as oil and up to 550°F
- Contains no silicone

# OTHER BOSTIK FINDLEY PRODUCTS



**SuperTak® Aerosol Adhesives** from Bostik Findley are a group of high performance adhesives conveniently packaged in safe, easy-to-handle and store aerosol containers. SuperTak aerosol adhesives offer a range of performance characteristics and deliver consistently reliable bonds in industrial maintenance, packaging and assembly applications.



**Blu-Tak®** from Bostik Findley is a pliable adhesive that can be used again and again. Its non-toxic, non-staining formula won't harm surfaces, making it ideal for hundreds of fastening and decorating jobs. It offers superior adhesion to a variety of surfaces, including glass, mirror and painted walls.



**Bostik Findley Sealants** are advanced formulations that deliver durability and flexibility under the most demanding conditions. They provide exceptionally high quality, high strength bonds that resist the problems posed by dissimilar substrates, long-term exposure to sunlight, temperature

changes, chemicals and joint movements. Whether your application is construction, industrial or marine, Bostik Findley has the sealant you need.



**Simson® Adhesives and Sealants**, based on Silyl Modified Polymers (SMP), combine the best of both worlds: the strength of polyurethanes and weatherability of silicones. Bostik Findley's years of experience have enabled it to develop a broad range of products with balanced properties suitable for many different applications in the industry.




Bostik Findley's **silicone line** includes **9732 RTV Silicone and Chem-Calk 1200**. The 9732 RTV Silicone is a single component acetic acid cure industrial sealant that cures to a tough, flexible, rubbery elastomer. Its outstanding weatherability allows the sealant to retain its original adhesion, elongation and tensile strength properties after years of exposure. Chem-Calk 1200® is a one-part silicone construction

sealant capable of +/- 25% movement in a well designed joint. It cures to a tough, flexible rubber when exposed to moisture present in the atmosphere.



Bostik Findley **Cyanoacrylate and Epoxy Adhesives** are the choice for forming permanent bonds to a variety of substrates, including high-performance engineered materials. Available in one- or two-part systems, these products offer a range of cure times and performance characteristics for a variety of critical applications.



**Bostik® Hot Melt Adhesives** offer a quick, clean and economical way to bond a wide variety of materials from wood, metal and glass to hard-to-bond plastics and vinyl. Bostik Findley offers the most complete line of hot melt adhesive technologies in the industry, including HM-PSA, HM-PUR, APAO, polyamides, polyesters and EVA co-polymers.

Bostik Findley's expanded line of **sealant and glue guns** offers users the best, most versatile hand-held applicators for all types of assembly, construction, maintenance or repair jobs.



**Liquid Adhesives** for all your fastening and joining needs on the production line or at the job site. No one offers you a more complete line of advanced, high quality liquid adhesive products than Bostik Findley. Solvent-based and waterborne adhesive formulations are available to deliver specific performance characteristics and capabilities in bonding various substrates.



**Bostik® Hand & Tool Towels** is a great revolutionary, waterless cleaning towel. Cleans hands and tools in seconds with no rinsing, drying or residue. Removes Never-Seez® grease, adhesive, ink, paint, tar and cured or uncured urethane and other types of sealants, plus much more.



1.888.603.8558 • www.bostikfindley-us.com

N1 Printed in USA, 4/02, 10M



Distributed by: