

NOW FEATURING

New convenient Packaging for Best and MVP⁴ • New and Improved TKO.
See inside for more details.

Bostik

The Adhesive Company



**Hardwood Installation
PRODUCTS**

PATCHES/UNDERLAYMENTS

MOISTURE/SOUND PROTECTION MEMBRANES

ADHESIVES

REPAIR KITS

TROWELS/TOOLS

CLEANERS

A**about Bostik, Inc.**



For more than a century, Bostik has stood for high quality adhesives, sealants and lubricants. Founded in 1889 as the Boston Blacking Company, Bostik has evolved to become one of the world's largest producers of adhesives and sealants. Today, Bostik is recognized for its leadership in the development and manufacturing of advanced adhesive systems serving industries around the globe.


Bostik is proud of its reputation for developing innovative, technological solutions for residential and commercial installations. In the mid 1980's we pioneered the world's first moisture cured urethane adhesive for hardwood flooring. Today, our line of moisture-cure urethane adhesives is the one most specified by architects and most preferred by contractors for all types of wood installations.

Bostik® Hardwood Products is a comprehensive line of patches/underlayments, moisture vapor & sound protection, adhesives, tools, cleaners and specialty products. We have the expertise to help you achieve the highest quality hardwood installations — from solids to engineered; above, on, or below grade.



The Adhesive Company

When it comes to hardwood installation solutions, the best products come from the first name in the industry.

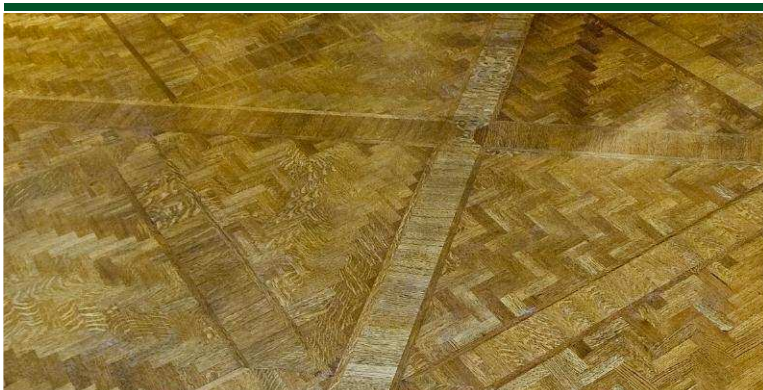

Universal Floors (Washington D.C)

Floor of the Year Award 2008

Members Choice & Best Engineered

Project: A complex pattern parquet floor based off of a photo of a Captains sea chest created out of American Folk Art marquetry.

Photo courtesy of Sprigg Lynn, Universal Floors

T able of Contents




Each product displaying Bostik's Blockade™ antimicrobial protection logo contains an agent which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive/membrane; the dried adhesive/membrane resists stains caused by mold. To obtain specific test information by product, please contact Bostik's Technical Service Department at 1-800-523-6530.



OUR GREEN MISSION

As a global leader in adhesives, coatings and sealant technologies, Bostik continuously strives to commercialize products that minimize environmental impact and promote the health and well being of our customers. Bostik shall demonstrate these objectives by achieving compliance with the most rigorous standards set forth by industry recognized authorities. All the products featured in this catalog are LEED compliant.

To learn more about our **GREEN MISSION** visit us at www.greenmission.bostik-us.com or to order one of our **LOW VOC Product Portfolios** email us at contactus@bostik-us.com.

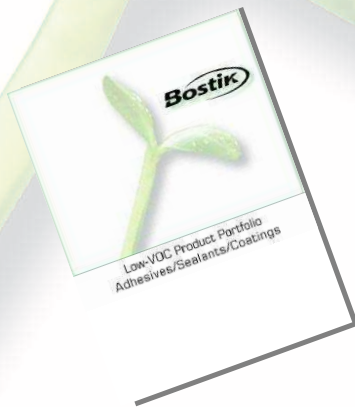

About Bostik	Inside Front Cover
Table of Contents	1

SURFACE PREPARATION

Bostik SL-150 Self-Leveling Underlayment	3
Bostik Fast Patch 102	3
Universal Primer	3

MOISTURE VAPOR PROTECTION SOUND CONTROL UNDERLAYMENT

MVP® Moisture Vapor Protection	4
EMC Epoxy Moisture Coating	5
Cork Sound Control Underlayment	5

URETHANE ADHESIVES

Bostik's Best Wood Flooring Adhesive	7
TKO Urethane Wood Flooring Adhesive	9
BST Urethane Wood Flooring Adhesive	10
EFA+ Elastomeric Wood Flooring Adhesive	10

CLEANERS & TOOLS

Ultimate Adhesive Remover	11
Bostik Trowels	11
Bostik Wood Floor Cleaner	11
Bostik Hand Cleaner	11

CARTRIDGE ADHESIVES

Bostik's Best™	13
Chem-Calk 900	13

REPAIR KITS

Hardwood Repair Kit (Fast Setting Urethane)	14
7575 Epoxy System	14

Floor of the Year Awards	15
Bostik Hardwood – A Complete System	16
Moisture Warranty	IBC



ON THE COVER

The Floor Man Company (Toledo, OH)
 Floor of the Year Award 2008
 Best Bedroom
 Project: Five Point Brazilian Cherry Star and Starburst out of Brazilian cherry and white oak.
 Installed with Bostik's Best Moisture Cure Wood Flooring Adhesive.
 Photo courtesy of Rick Wilson



Photo Supplied by Czar Floors, Inc. (Newtown, PA)
NWFA 2008 Floor of the Year Award Winner
Best Living Room/Family Room (CNC)
New York City Residence
3/4" solid parquet, using white oak for the main body of the parquet
and merbau and maple for the grid.
Installed using Bostik's Best Moisture Cure Wood Flooring Adhesive

Surface Preparation

BOSTIK® SL-150™



Bostik® SL-150™ is a high compressive strength, self-leveling, cement-based underlayment used to repair, smooth and level concrete as well as existing ceramic, terrazzo or approved plywood sub-floors prior to the installation of carpet, vinyl, VCT, laminate, solid and engineered hardwood flooring, ceramic or natural stone. SL-150 is suitable for thickness from featheredge to 1" thick; or from 1/2" to 5" thick when mixed as designed with pea gravel. Use on, above or below grade. Use SL-150 in smaller installations where it may be mixed by hand; or use underlayment pump to quickly cover large jobs.

TYPICAL PHYSICAL PROPERTIES

Heal/Wet Edge Time	20 minutes
Initial Set	1 hour 30 minutes @ 70°F
Final Set	2 hours @ 70°F
Compressive Strengths	
4 hours	1500 psi
24 hours	3500 psi
7 day	5000 psi
28 day	5500 psi



Installation Video Available
DVD or VHS

PACKAGING

SL-150 is available in 50 lb. bags.

UNIVERSAL PRIMER



Designed for use with SL-150 Self Leveling Underlayment. Use over concrete, approved plywood substrates, cement backer board, ceramic tile, marble, granite and terrazzo.

PACKAGING

Available in 1 gallon containers.

BOSTIK® FAST PATCH 102



Fast Patch 102 is a fast-setting, polymer-modified, cement-based compound. Simply mix with water to repair cracks and holes and uneven surfaces from feather edge up to 1/2" thick in a single application. Use Fast Patch prior to the installation of carpet, wood, ceramic tile and stone floors. It can be applied over concrete, existing ceramic tile, exterior grade plywood and well-bonded vinyl tile.

TYPICAL PHYSICAL PROPERTIES

Pot Life	Approx. 60 minutes
Compressive Strength	
7 day	>3,400 psi
28 day	>4,900 psi
Cure Time	8 to 9 hours @ 70°F

PACKAGING

Floor Patch 102 is available in 25 lb. (11.34 kg) bags.

BOSTIK'S BEST & BST TEMPERATURE/RELATIVE HUMIDITY CHART

TEMP		HUMIDITY				
		40%	50%	60%	70%	80%
60°F	Tack	120 Minutes	110 Minutes	100 Minutes	90 Minutes	80 Minutes
	Open	3.5 Hours	3.5 Hours	3.5 Hours	3 Hours	3 Hours
65°F	Tack	110 Minutes	100 Minutes	90 Minutes	80 Minutes	70 Minutes
	Open	3 Hours	3 Hours	3 Hours	3 Hours	2.5 Hours
70°F	Tack	100 Minutes	90 Minutes	80 Minutes	70 Minutes	60 Minutes
	Open	3 Hours	3 Hours	3 Hours	2.5 Hours	2.5 Hours
75°F	Tack	90 Minutes	80 Minutes	70 Minutes	60 Minutes	50 Minutes
	Open	3 Hours	2.5 Hours	2.5 Hours	2.5 Hours	2.5 Hours
80°F	Tack	80 Minutes	70 Minutes	60 Minutes	50 Minutes	40 Minutes
	Open	3 Hours	2.5 Hours	2.5 Hours	2.5 Hours	2 Hours

NOTE: This chart is for reference only. Actual times may vary dramatically based on job site conditions.

WHAT IS MCU?

What is a Moisture Cured Urethane (MCU)?

Moisture Cure Urethanes are liquids that when exposed to "moisture," turns into a flexible solid.

Where Does the Moisture Come From?

Moisture is present in the air, the wood flooring, and the substrate. It takes about 1 fl. oz. of water to cure approximately 400 ft² of a moisture cure urethane.

Moisture Vapor & Sound Protection

SPECIALLY FORMULATED TO REDUCE MOISTURE VAPOR TRANSMISSION



YOUR “ULTIMATE SOLUTION” MVP4® MOISTURE VAPOR PROTECTION



MVP4 Moisture Vapor Protection is a one-part, trowel applied, elastomeric, moisture cure urethane membrane designed to:

1. Reduce Moisture Vapor Transmission from the Subfloor
2. Create a Noise Reduction Barrier over the Substrate, Peace Noise Reduction
3. Establish an Anti-fracture Membrane that can Bridge Subfloor Cracks up to 1/8” Prior to or After Installation
4. Contains Bostik Blockade™ antimicrobial agent providing built-in protection to inhibit the growth of bacteria, mold and mildew on the surface of the dried membrane; the dried membrane resists stains caused by mold.

FEATURES & BENEFITS

- MVP4 Peace Noise Reduction achieved an IIC=62 and a STC=61
- May be utilized in both engineered and solid wood floor installations
- Extremely alkaline resistant
- May be used below grade for engineered wood flooring installations
- Extremely Low Odor
- Waterproof
- Freeze Thaw Stable
- Contains NO Water
- User friendly – trowels very fast
- May be used for residential, commercial, and institutional installations.

PACKAGING

MVP4 is available in 5 gallon pails and (3 x 1.5 gallon) foil bags.

- 1.5 gallon Foil Bags
- No skinning
- Less weight than 5 gallon pail
- Easier to handle
- Reduce waste
- Easier to close/seal
- Recyclable box
- No empty pails to dispose

NEW CONVENIENT PACKAGING SIZE



STARTER ROW

Installing a Starter Row

Contractors generally use carpet tack strip or wood secured with masonry nails as a starter row. The starter row provides a stationary point to push against so the flooring doesn't move during the installation.

Moisture Vapor & Sound Protection

NEW! BOSTIK® EMC™ (EPOXY MOISTURE COATING)



Bostik EMC is a high performance, rapid drying, water-based, penetrating epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates including; "freshly-poured/green concrete," properly prepared concrete, cement backer board, radiant heat flooring, and cement based terrazzo prior to the installation of engineered or solid hardwood; carpet; vinyl/VCT; rubber; porcelain, marble, granite or ceramic tile floor covering. Bostik EMC is a low odor, non-flammable, two-component system.

NEW! BOSTIK® EMC™

- TACK-FREE TO THE TOUCH IN JUST 6 HOURS!
- EMC EPOXY MOISTURE COATING IS ROLLER APPLIED

FEATURES & BENEFITS

- Can apply immediately after freshly poured/green concrete has achieved initial set
- Reduces the surface alkalinity of concrete slabs to pH levels of 9 or lower
- Reduces Moisture Vapor Emission Rates from < 25 lbs. to < 3 lbs. per ASTM F 1869-4
- Deep Penetrating/Low Viscosity Formula
- Low odor
- Easy clean-up

PACKAGING

Each kit contains 24 fl. oz. of Part A Resin and 104 fl. oz. of Part B Hardener.

CORK




This sound control underlayment contains millions of air filled pockets per cubic inch, making it an ideal insulator of sound. Cork is an outstanding sound barrier for all types of flooring material including hardwood, natural stone, marble and ceramic tile. Unlike synthetic underlayments that deteriorate after years of heavy use, and ultimately cause hollow-sounding floors, cork cells are very stable and do not

break down. Cork provides a consistently solid sounding surface.

SYSTEM WARRANTY

Bostik can supply a complete sound reduction system and offer one warranty to cover the entire flooring project. The System Warranty will include the following Bostik products:

- Moisture vapor barrier
- Patches and underlayments
- Cork sound control underlayment
- Hardwood adhesives

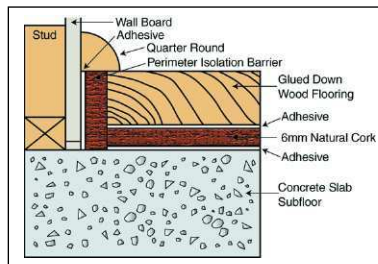

Platinum Level of the American Airlines Center in Dallas Texas. Installed by Woodwright Company, Inc., Dallas, TX. A 24,000 sq. ft. installation of bamboo using Bostik's Best Urethane Adhesive



CHEMICAL & PHYSICAL PROPERTIES

Binder	Polyurethane Resin	
Base	Composition of Cork Granules: Size 1-3	
Density	190 - 210 Kg/cm ³	11.7 - 12.5 lbs/ft ³
Tensile Strength	5 - 8 Kg/cm ²	71 - 114 lbs/in ²
Recovery	75%	
Flexibility F5	Pass	
Floatation Tests	3 hrs in boiling water: Good 1/2 hr in boiling 35% hydrochloric acid: Good 2 hrs at 100°F in ASTM oil: Good	
Thermal Conductivity	0.042 Kcal/m ² h°C	
Flammability	Cork rolls are considered fire retarding and do not produce toxic exhalations during combustion	
Dimensional Tolerance	Width/Length: +/-0.5mm Thickness: +/- 0.2mm	
Size	4' x 50' x 6mm rolls	

ACOUSTICAL RATING

	Hardwood	Ceramic Tile	Without Floor
	STC	IIC	STC
Concrete Slab 8"	56	62	60
Concrete Slab 6"	54	59	58
Concrete Slab 4" (With Steel Deck)	60	65	64
Wood Joist Construction	54	60	54

PACKAGING

6mm. Cork is available in 4' x 50' rolls and 2' x 3' sheets. Also available in 3mm rolls.

ADHESIVE

Spreading the Adhesive

Using the recommended trowel, spread out approximately three feet of adhesive from the starter row and immediately begin installing the flooring.



Birgir Juell LTD. (Chicago, IL)
Floor of the Year Award 2008
Best Commercial Show Room

Project: Versailles parquet with wenge feature strips as well as a popular parquet that Juell designed based on a floor from an 18th century chateau in France's Loire Valley, Chateau Montgeoffroy. Installed using Bostik's Best Moisture Cure Wood Flooring Adhesive
Photo courtesy of Meagan Lloyd

Urethane Adhesives

BOSTIK'S BEST®



Bostik's Best is a one-part, trowel-applied, tacking moisture-cure, urethane adhesive; this advanced scientifically formulated adhesive does NOT contain any water. Once cured, Bostik's Best is waterproof and is not adversely affected by exposure to moisture or water; its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. Bostik's Best elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor.

Bostik's Best may be used to adhere all engineered, acrylic impregnated, solid plank-flat milled, shorts, bamboo, cork, and parquet hardwood flooring designed and recommended in writing by the hardwood flooring manufacturer for glue-down applications. This adhesive can also be used to install plywood as described, as well as, ceramic tile, marble, and stone inlays for light commercial and/or residential applications.

Bostik's Best may be used over all properly prepared substrates common to hardwood flooring installations including: concrete, plywood, particle or chip board (underlayment grade), well bonded vinyl and ceramic tile, cement backer board, gypsum patch/underlayments (dry, above-grade), cement patch/underlayments, radiant-heat flooring and terrazzo.

This product contains Bostik's BLOCKADE™ antimicrobial protection, which inhibits growth of bacteria, mold, or mildew on the surface of the dried adhesive; the dried adhesive resists stains caused by mold.

FEATURES & BENEFITS

- The original and #1 selling moisture-cure urethane in the industry.
- Recommended by most hardwood flooring manufacturers.
- Contains no water... will not cause cupping or end-lifting.
- For use in above, on and below grade installations.
- Offers vapor-retarding characteristics to wood flooring installations. (See Chemical & Physical Properties.)
- Set with Wet-Lay or Walk-On-Work Method of Installation.
- Tacky consistency holds down flooring with normal bow and bridges minor subfloor variations.
- High solids results in greater adhesive coverage.

CHEMICAL & PHYSICAL PROPERTIES

Percentage of Water ¹	0.0%
Volume of Water in 5 Gallon Pail ¹	0.0 Pints or 0.0 Quarts
Water Vapor Permeance ²	0.36
Water Vapor Permeability ²	5.9 x 10 ⁻⁴
Percentage of Adhesive Transfer Required for Engineered Hardwood Flooring	≥80%
Percentage of Adhesive Transfer Required for Solid Hardwood Flooring	≥95%
Use to Glue Down Solid Hardwood Flooring	Yes
Elongation	>150%
Shear Strength (Oak to Concrete)	>300 psi
Tensile Strength (modulus at 25%)	>185 psi
Does Adhesive Develop "Tack"	Yes
"Working Time" in Minutes (Including Tack Time)	Open Time: 180 Tack Time: 60 Working Time: 180
Application Temperature	50°F to 100°F
Service Temperature	-40°F to 150°F
Flammability	Based on ASTM E-84 tests: Flame Spread Index is 25.
Flash Point	142°F, closed cup
Viscosity	220,000 cps
V.O.C. Compliant	Yes (86 grams/liter)
Odor	Mild/not easily detectable
Color	Eggshell
Weight	12.66 lbs./gallon
Cure Time	8 to 10 hours

PACKAGING

Bostik's Best is available in 5 gallon pails, (3 x 1.5 gallon) foil bags, 10.1 oz. cartridges (24 per case) and 28 oz. cartridges (12 per case).

¹Per ASTM E203-01 Standard Test Method for Water Using Volumetric Karl Fischer Titration Method. Results rounded to the nearest tenth. Test method has error range of +/- 2%

²Per ASTM E-96 Standard Test Methods for Water Vapor Transmission of Materials. Ratings are g/m² -24hour-mmHG.



NEW CONVENIENT PACKAGING SIZE

- 1.5 gallon Foil Bags
- No skinning
- Less weight than pails
- Easier to handle
- Reduce waste
- Easier to close/seal
- Recyclable box
- No empty pails to dispose



Palembas Hardwood Floors, Inc. (Escondido, CA)
Floor of the Year Award Winner 2008

Best Limited Species

Project: Traditional hand bent boat deck consisting of 1/2" x 2 1/4" FEQ teak and 1/4" x 1/4" wenge inlays. This floor was hand bent on site without the aid of steam, water or resawing. It was installed in epoxy resin one board at a time over radiant heat.

Subfloor was installed using MVP¹ Moisture Vapor Protection and Bostik's Best Moisture Cure Wood Flooring Adhesive.

Photo courtesy of David Hewitt & Anne Garrison Architectural Photography



TKO URETHANE



Bostik's TKO is a one-part trowel applied, moisture cure urethane; this advanced scientifically formulated adhesive does NOT contain any water. Once cured, TKO is waterproof and is not adversely affected by exposure to moisture or water; its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. TKO's elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor.

May be used to adhere all engineered, acrylic impregnated solid plank flat milled, shorts, bamboo and parquet hardwood flooring designed and recommended in writing by the hardwood flooring manufacture for glue down applications. This adhesive can also be used to install plywood as described, as well as ceramic tile, marble and stone inlays for light commercial and/or residential applications. TKO may be used over properly prepared substrates common to hardwood flooring installations including: concrete, plywood, particle or chip board (underlayment grade), well bonded vinyl and ceramic tile, cement backer board, gypsum patch/underlayment (dry-above grade), cement patch/underlayments, radiant heat flooring and terrazzo.

FEATURES & BENEFITS

A technical innovation in moisture-cure urethane adhesives that offers the following:

- Zero Solvent
- Zero VOC*³
- Easy to spread
- Holds a better ridge
- Cleans up faster when wet than most urethane adhesives
- Contains BLOCKADE™ antimicrobial protection which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive; the dried adhesive resists stains caused by mold.


Photo supplied by Floor Man, (Toledo, OH)

Floor of the Year Award Winner 2008

Best Kitchen/Dining Room (CNC)

Project: Parquet made up on African Wenge (black wood) and installed with Bostik Best Moisture Cure Wood Flooring Adhesive

Photo courtesy of Rick Wilson

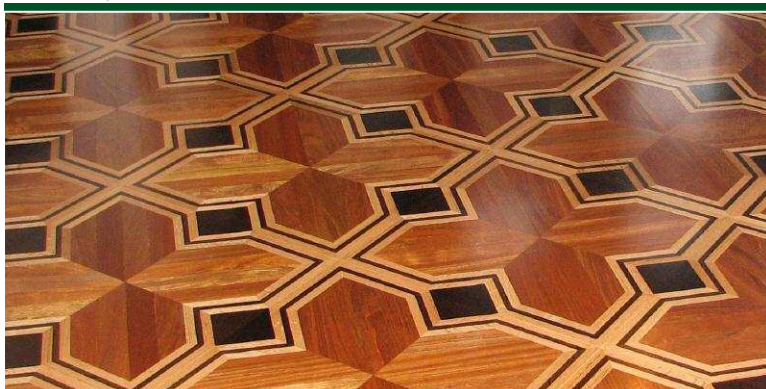

CHEMICAL & PHYSICAL PROPERTIES

Percentage of Water ¹	0.0%
Volume of Water in 5 Gallon Pail ¹	0.0 Pints or 0.0 Quarts
Water Vapor Permeance ²	0.54
Water Vapor Permeability ²	8.9 x 10 ⁻⁴
Percentage of Adhesive Transfer	
Required for Engineered	
Hardwood Flooring	≥80%
Percentage of Adhesive Transfer	
Required for Solid Hardwood	
Flooring	≥95%
Use to Glue Down Solids	Yes
Elongation	>180%
Shear Strength (Oak to Concrete)	>160 psi
Tensile Strength (modulus at 25%)	>120 psi
Does Adhesive Develop "Tack"	No
"Working Time" in Minutes	Open Time: 180
	Tack Time: n/a
	Working Time: 180
Application Temperature	50°F to 100°F
Service Temperature	-40°F to 150°F
Flash Point	> 500°F, closed cup
Viscosity	~ 550,000 cps
V.O.C. Compliant	Yes (0 VOC)
Odor	Mild/not easily detectable
Color	Mint
Weight	13.8 lbs./gallon
Cure Time	8 to 10 hours

PACKAGING

TKO is available in 4 gallon pails.

¹Per ASTM E203-01 Standard Test Method for Water Using Volumetric Karl Fischer Titration Method. Results rounded to the nearest tenth. Test method has error range of +/- 2%

²Per ASTM E-96 Standard Test Methods for Water Vapor Transmission of Materials. Ratings are g/m²-24hour-mmHG.

³As calculated per SCAQMD 1168

OPEN TIME

Hot and humid conditions reduce the adhesive's open time, while cold and dry conditions extend the open time. All urethane adhesives should be wet to the touch and transfer to your fingers easily during installation. Do not install wood into adhesive that has skinned over. Scrape it up and apply fresh adhesive.

Urethane Adhesives

BST™ URETHANE



BST™ represents a breakthrough technology in urethane. This product offers the exceptional physical and chemical properties for a urethane. BST is a one-part, trowel-applied, tacking moisture cure urethane with unsurpassed green strength and ridge holding capabilities. It trowels easily and, once cured, is not affected by moisture or water. Because of its superior elongation and bond strength, BST can be used to install solid as well as engineered flooring.

FEATURES & BENEFITS

- Contains No Water... will not cause cupping or end-lifting.
- V.O.C. Compliant.
- Freeze/Thaw Stable.
- Can be used to install all types of wood flooring including solids, as well as ceramic tile, marble and stone inlays for light commercial and residential applications.
- Offers Vapor-Retarding Characteristics to Wood Flooring Installations (see Chemical & Physical Properties).
- Remains Elastomeric; Moves with Expanding/Contracting Wood.
- High Green Strength.
- High Bond Strength and Elongation.

CHEMICAL & PHYSICAL PROPERTIES

Percentage of Water	0.0%
Volume of Water in 5 Gallon Pail	0.0 Pints or 0.0 Quarts
Water Vapor Permeance	0.4
Water Vapor Permeability	4.5×10^{-4}
Percentage of Adhesive Transfer Required for Engineered Hardwood Flooring	$\geq 80\%$
Percentage of Adhesive Transfer Required for Solid Hardwood Flooring	$\geq 95\%$
Use to Glue Down Solids	Yes
Elongation	>100%
Shear Strength (Oak to Concrete)	>180 psi
Tensile Strength (modulus at 25%)	>175 psi
Does Adhesive Develop "Tack"	Yes
"Working Time" in Minutes (Including Flash Time)	Open Time: 180 Flash Time: 20 Working Time: 180
Application Temperature	50°F to 100°F.
Cure Time	Higher humidity & temperature will accelerate cure. Under normal conditions, light foot traffic is acceptable after 8 to 10 hours, normal traffic after 24 hours.

PACKAGING

BST is available in 5 gallon pails.

BOSTIK EFA+ (ELASTOMERIC FLOORING ADHESIVE)



Bostik's EFA+™ Elastomeric Flooring Adhesive is a one-part, trowel applied, moisture-cure urethane adhesive; this advanced scientifically formulated adhesive does NOT contain any water. Once cured, EFA is waterproof and is not adversely affected by exposure to moisture or water; its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. EFA's elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor.

FEATURES & BENEFITS

- Contains no water... will not cause cupping or end-lifting.
- Spreads and trowels easily... feels and spreads like a latex.
- Wet lay... no flash time required.
- Fast cure rate... quick turnaround.
- V.O.C. Compliant
- Low odor... virtually odorless.
- Freeze/thaw stable.
- Waterproof adhesive... once cured, bond is not affected by moisture.

CHEMICAL & PHYSICAL PROPERTIES

Percentage of Water	0.0%
Volume of Water in 5 Gallon Pail	0.0 Pints or 0.0 Quarts
Water Vapor Permeance	0.4
Water Vapor Permeability	4.3×10^{-4}
Percentage of Adhesive Transfer Required	
Engineered Hardwood Flooring	$\geq 85\%$
Solid Hardwood Flooring	$\geq 95\%$
Use to Glue Down Solids	Yes
Elongation	>45%
Shear Strength (Oak to Concrete)	>165 psi
Tensile Strength (modulus at 25%)	>150 psi
Does Adhesive Develop "Tack"	No
"Working Time" in Minutes (Including Flash Time)	Open Time: 45 Flash Time: n/a Working Time: 45

PACKAGING

EFA+ is available in 5 gallon pails.

Cleaners & Tools

ULTIMATE ADHESIVE REMOVER



Use Bostik's Ultimate Adhesive Remover to remove wet and cured urethane adhesive from the surface of pre-finished (non-wax) wood flooring. Ultimate Adhesive Remover is a readily biodegradable, low-odor, water-rinseable solution.

Bostik's Ultimate Urethane Adhesive Remover is available in two formulations: liquid and pre-soaked, ready-to-use towels.

PACKAGING

Liquid Formulation, 32-ounce bottle, 12 per case.
Ready-To-Use Towels, 60 pre-wet towel container, 6 per case. Sold in full cases only.

BOSTIK WOOD FLOOR CLEANER



Bostik Wood Floor Cleaner cleans and shines all finished hardwood, laminate, stone and ceramic surfaces. Use Bostik's Wood Floor Cleaner everyday to safely clean all types of unwaxed flooring surfaces; finished polyurethane hardwood, laminates, ceramic and stone. It is specifically designed to be used with no need to dilute the packaged product. Use Bostik's Wood Floor Cleaner after glue-down wood flooring installations to remove adhesive remover residue and provide a clean, fresh luster.

Also available in a convenient kit! Each kit includes a 32 oz. spray bottle, mop handle, 15" x 5" mop head and one washable Bostik microfiber cloth.

PACKAGING

Available sizes:
4 x 1 gallon container
6 x 32 oz spray bottle
6 x 1 tub of towels
4 x 1 kit





BOSTIK'S HAND CLEANER TOWELS HEAVY DUTY WITH PUMICE POWER

Premoistened heavy duty towel with pumice scrubbing power works fast to loosen, dissolve and absorb dirt and grease. Each towel has deep cleaning scrubbers to remove embedded grime easily and is fortified with emollients for the skin. These shop size durable towels quickly remove tough-to-clean substances including lubricant, oils, ink, tar, wax, caulk, sealants, paint, epoxy, heavy grease, adhesives and much more.

PACKAGING

6 x 1 Tubs (each tub contains 30 Premoistened Towels)
Cases of Individual Towelettes

TROWELS

Item/Description	Item Number	Coverage
 1/8" wide x 1/8" deep x 1/8" centered Square-Notch Trowel Finger Block Parquet	B11126	80 sq ft/gal
 3/16" wide x 5/32" deep V-Notch Trowel 3 ply and 5 ply Engineered Plank	B11127	50 sq ft/gal
 1/4" wide x 1/8" deep x 1/4" centered Square-Notch Trowel >1/2" Engineered Plank & 3/4" Parquet	B11124	40 sq ft/gal
 1/4" wide x 1/4" deep x 1/4" centered Square-Notch Trowel Flat Milled Solid & Shorts or Plywood	B11125	35 sq ft/gal

PACKAGING

Sold in Full Cases Only, 6 Trowels per Case.

Trowel size is suggested to maximize coverage of adhesive. Periodically check coverage of adhesive during installation; >80% coverage is required for engineered hardwood flooring; >95% coverage is required for solid hardwood flooring. Uneven subflooring may require the use of either a leveling/patching material, or a larger notched trowel for proper coverage of adhesive.



Universal Floors, Inc. (Washington DC)
Floor of the Year Award Winner 2008
Best Entry

Project: Michaelangelo's "The Creation of Adam"
Installed with Bostik's Best Moisture Cure Urethane Adhesive
Photo courtesy of Sprigg Lynn, Universal Floors, Inc.

C artridge Adhesives

BOSTIK'S BEST



A one-part cartridge/gun applied, multi-use, moisture-cure urethane adhesive that can be used to install medallions, borders, stair treads and transition strips. This product contains Blockade™ antimicrobial protection.

PHYSICAL PROPERTIES

Tack Free Time	90 minutes
Tool/Work Life	70 minutes
Curing Time at 77°F	1.5 to 3 days
Hardness (Shore A)	40-45
Tensile Strength	240 psi

PACKAGING

Bostik Best Cartridges are available in 10.1 oz., 24 per case, cartridges and 28 oz. cartridges, 12 per case.

CHEM-CALK® 900



A one-part, cartridge/gun applied, moisture cure urethane adhesive that does not contain water or chlorinated solvents, is V.O.C. Compliant and has no ozone depleting chemicals. Chem-Calk 900 can be used to install medallions, borders, stair treads and transition strips.

PHYSICAL PROPERTIES

Uncured		
Tool/Work Life	70 Minutes	Bostik Test Method
Initial Set	6 Hours	ASTM C679
Full Cure	3-6 Days	Varies w/relative humidity
Flow, Sag, Slump	0.1 inch	ASTM C639
After 14 days cure at 77°F and 50% RH		
Hardness (Shore A)	38	ASTM D2240
Tensile Strength	180 psi	ASTM D412
Elongation	950%	ASTM D412
Adhesion in Peel	>35 piw	ASTM C794

PACKAGING

Chem-Calk 900 is available in 10.3 oz. cartridges, 24 per case.



BLUE TAPE

Taping Rows Together

After several rows of flooring are installed, tape them together with removable 3M blue tape. This will allow you to walk on your work without having floor boards move around.

Repair Kits

HARDWOOD URETHANE ADHESIVE REPAIR KITS



This rapid setting, two component polyurethane adhesive, is used to replace floor boards, repair hollow spots, and to install thresholds and mouldings. The adhesive has extremely high bond strength and flexibility, making it the perfect choice when bonding wood-to-wood, or wood-to-concrete.

FEATURES & BENEFITS

- Contains no water
- Flows easily
- Will not become brittle
- Easy to use
- Fully cured in 30 minutes
- Remains flexible
- Exceptional bond to wood and concrete
- Urethane based

7575 EPOXY SYSTEMS



This General Purpose two-component epoxy system is used for all applications that require fast cure time. The epoxy has extremely high bond strength and cures in 5 minutes.

PACKAGING

Each foil packet contains: 50ml of 100% urethane adhesive, one static mixer and a 1/16" needle. Hardwood Repair Kits are packaged 80 kits per case.

URETHANE ADHESIVE

PHYSICAL PROPERTIES

Color	Transparent to light straw
Operating temperature range	-76°F to 250°F
Specific gravity	1.24
Hardness, Shore D	74
Impact, Izod, ft. lbs./ inch of notch	2.1
Dielectric strength, volts/mil.	415

PACKAGING

7575 Epoxy is available in 2 oz. cartridges, 50 per case. (Static Mixer: 10 per bag. Dispensing Gun: 1 per box.)

EPOXY ADHESIVE



CLEANING

Cleaning the Adhesive

Because urethane adhesives bond extremely well to the surface of pre-finished flooring you should clean-up the adhesive residue as you work. It is possible to remove cured adhesive but it takes a lot of time and effort.

NWFA Floor of the Year Award Winners Use Bostik® Adhesives



2008



Universal Floors, Inc.
Washington, D.C.

Members Choice & Best Engineered -2008

Project: Engineered Parquet Floor Patterned after an American Folk Art Marquetry.

Best Entry Foyer

Project: Michelangelo's "The Creation of Adam"



**Seabaugh Custom
Hardwood Floors, Inc.**

Cape Girardeau, MO

Best Kitchen/Dining Room (Non CNC)- 2008

Best Living Room/Family Room (Non CNC)- 2008

Project: Both rooms were Riftsawn ash with aluminum strips, abstract non directional floor.



Floor Man Company, Inc.
Toledo, Ohio

Best Kitchen/Dining Room (CNC) -2008

Project: Parquet Made up of African Wenge (black wood).

Best Bedroom- 2008

Project: Five Point Brazilian Cherry Star and Starburst out of Brazilian Cherry and White Oak.



Birger Jewell Ltd.
Chicago, IL

Best Commercial Show Room- 2008

Project: Versailles Parquet with wenge feature strips as well as popular parquet Juell designed based on a floor from the 18th century chateau in France's Loire Valley, Chateau Montgeoffroy.



Czar Floor, Inc.
Newton, PA

Best Living Room/Family Room (CNC)- 2008

Project: 3/4-inch solid parquet using white oak for main body of the parquet and merbau and maple for the grid.



Pasadena Wood Floors
Pasadena, CA

Best Restoration- 2008

Project: Charitable Contribution- Restoration of the observatory at the Monrovia, California High School.




Palembas Hardwood Floors, Inc.
Escondido, CA

Best Limited Species- 2008

Project: Teak boat decking 2 1/4" wide, with a 1/2" rabbet, 1/2" thick snf 6 to 12 feet long was used, as well as a marine epoxy resin that would stick to the oily wood.

Bostik® Hardwood Products

A Complete System

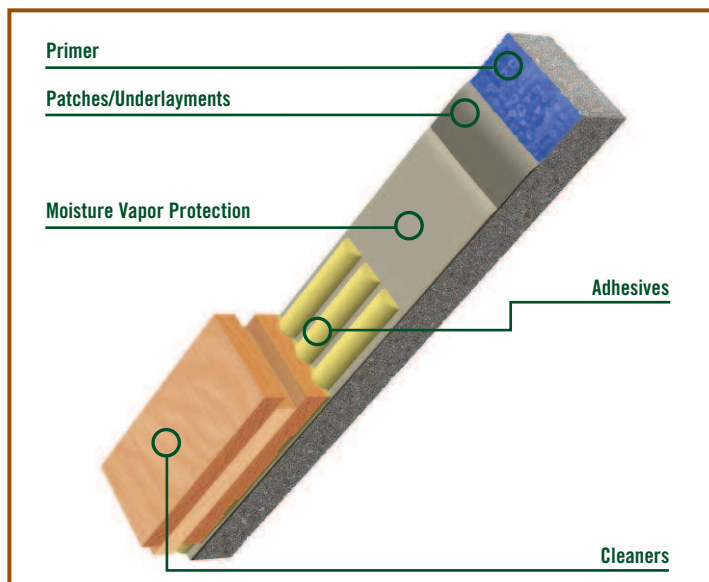

BOSTIK, INC. IS THE ONLY COMPANY THAT CAN OFFER ONE WARRANTY TO COVER THE ENTIRE HARDWOOD FLOORING PROJECT.

The larger the job, the more of an issue it is. If you're bidding a large job and are using Bostik Hardwood Flooring Products, you can beat out the competition by offering One Job Specific Warranty to cover the whole job.

Please contact Bostik's Technical Service Department at 800-523-6530.

Primer

- Universal Primer

Patches/Underlayments

- Bostik SL-150
- Fast Patch 102
- Cork-Sound Control Underlayment

Moisture Vapor Protection

- MVP® Moisture Vapor Protection
- Bostik EMC

Adhesives

- Bostik's Best
- TKO
- BST Urethane
- EFA+

Cleaners

- Ultimate Remover
- Bostik Wood Floor Cleaners

Accessories

- Ultimate Remover
- Trowels

Bostik® Hardwood Display Board

A visual guide to the most common Bostik Hardwood Flooring Installation Systems, which include patches/underlayments, moisture/sound protection membranes, and adhesives. To obtain a dealer display board contact your local Bostik Hardwood Territory Sales Manager or your local Bostik Hardwood Product Distributor.





The Adhesive Company

WARRANTY

HARDWOOD ADHESIVE BOND WARRANTY

Bostik Hardwood Products warrants that Bostik's Hardwood Adhesives¹ will bond all engineered, solid, or acrylic impregnated hardwood flooring, designed and recommended in writing by the wood flooring manufacturer for glue-down, to all substrates common to hardwood flooring for a period equal to the wood flooring manufacturer's product warranty.

HARDWOOD MOISTURE WARRANTY

Bostik Hardwood Products warrants that Bostik's Hardwood Adhesives¹, when used in conjunction with Bostik Hardwood Products Approved Surface Preparation Membrane², will bond and will protect all engineered, solid, or acrylic impregnated hardwood flooring, designed and recommended in writing by the wood flooring manufacturer for glue-down to subfloors described in the associated Bostik Hardwood Products Approved Surface Preparation Membrane² data sheet against moisture damage through the sub-floor for a period equal to the wood flooring manufacturer's product warranty.

These warranties are contingent upon the following:

The evaluation of a potential claim by a Bostik, Inc. representative in advance of any replacement work, submittal of wood flooring manufacturer's product warranty, and a copy of the original materials and installation invoice(s). Any repairs conducted prior to evaluation will void all warranties.

The adhesive must be used in accordance with Bostik Hardwood Products most recent published literature.

The wood flooring must be installed in accordance with the wood flooring manufacturer's most recent published literature pertaining to glue down installations, including but not limited to, wood flooring acclimation, expansion space, jobsite temperature, relative humidity and air flow requirements.

The installation must be maintained in accordance with the wood flooring manufacturer's recommendations including, but not limited to, temperature, relative humidity, and proper maintenance.

This warranty does not cover damage due to flooding, hydrostatic head, puddling, improper maintenance, low/excessive relative humidity and/or temperature, or any issues not related to excessive moisture proven to be coming through the membrane.

This warranty is to the original purchaser and is non-transferable. Bostik Hardwood Products will repair or replace the affected flooring one time only.

¹The following Bostik Hardwood Products Adhesives are covered with this warranty: Bostik's Best™;TKO®; BST Urethane™; and EFA+™.

²The following Bostik Hardwood Products Approved Surface Preparation Membrane is covered with this warranty, when applied according to the most recent published literature: MVP+™ Moisture Vapor Protection.

In the event of a valid claim under this warranty, Bostik Hardwood Products will pay to repair or replace on a square foot basis the portion(s) of the installation that is proven to be defective. This payment is to include all reasonable materials and labor only. Bostik Hardwood Products is not responsible for workmanship not in accordance with Bostik Hardwood Products most recent published literature, defects in the wood flooring, abuse, misuse, or losses due to delays or any other consequential damages.

Contact Bostik's Technical Service department for job specific recommendations and warranties.

Corporate Office

Bostik, Inc.
Middleton, MA 01949
800/726-7845
www.bostik-us.com

Manufacturing Locations

Conyers, GA 30207
Temecula, CA 92590
Huntingdon Valley, PA 19006
Paulsboro, NJ 08066
Twinsburg OH 44087

Customer Service

Phone: 888/592-8558
Fax: 978/750-7306

Technical Service

800/523-6530





**Proud member of
the green clique.**

Go to www.greenmission.bostik-us.com



Bostik

www.bostik-us.com • 888-592-8558



The Adhesive Company

Bostik, Inc.

211 Boston Street • Middleton, MA 01949

1-888-592-8558 • email: contactus@bostik-us.com

www.bostik-us.com

www.greenmission.bostik-us.com

H15-031909