



PACKAGE AND LOADING GUIDE



CONTENTS

EnergyShield® & EnergyShield® NH 3

EnergyShield® CGF & EnergyShield® CGF NH..... 3

EnergyShield® PanelCast™ 4

EnergyShield® PanelCast™ Tri-Lam..... 4

EnergyShield® Pro 5

EnergyShield® CGF Pro..... 5


EnergyShield® Ply Pro 6

EnergyShield® Ply 7


EnergyShield® XR..... 8

Manufacturing and Sales Locations..... 9

NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	PIECES PER TRUCKLOAD 4' x 9'	SQUARE FT. PER PACKAGE 4' x 9'	SQUARE FT. PER TRUCKLOAD 4' x 9'	WEIGHT (LB/SF)
0.5"	3.3	0.58	44	2,112	1,408	67,584	1,760	1,584	63,360	0.120
0.75"	5.0	0.88	30	1,440	960	46,080	1,200	1,080	43,200	0.152
1.0"	6.5	1.14	23	1,104	736	35,328	920	828	33,120	0.186
1.5"	9.8	1.73	31	744	992	23,808	620	1,116	22,320	0.263
1.6"	10.5	1.85	29	696	928	22,272	580	1,044	20,880	0.279
2.0"	13.1	2.31	23	552	736	17,664	460	828	16,560	0.340
2.5"	16.0	2.82	19	456	608	14,592	380	684	13,680	0.407
3.0"	19.7	3.47	15	360	480	11,520	300	540	10,800	0.493
3.5"	22.2	3.91	13	312	416	9,984	260	468	9,360	0.551
4.0"	26.0	4.58	11	264	352	8,448	220	396	7,920	0.639

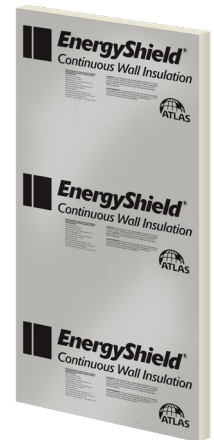

NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	PIECES PER TRUCKLOAD 4' x 9'	SQUARE FT. PER PACKAGE 4' x 9'	SQUARE FT. PER TRUCKLOAD 4' x 9'	WEIGHT (LB/SF)
0.5"	3.0	0.53	45	2,160	1,440	69,120	1,800	1,620	64,800	0.2552
0.75"	4.5	0.79	31	1,488	992	47,616	1,240	1,116	44,640	0.2852
1.0"	6.0	1.06	23	1,104	736	35,328	920	828	33,120	0.3214
1.5"	9.0	1.59	31	744	992	23,808	620	1,116	22,320	0.4014
1.7"	10.2	1.8	28	672	896	21,504	560	1,008	20,160	0.4326
2.0"	12.1	2.13	23	552	736	17,664	460	828	16,560	0.4794
2.5"	15.3	2.69	18	432	576	13,824	360	648	12,960	0.5604
3.0"	18.5	3.26	15	360	480	11,520	300	540	10,800	0.6399
3.5"	21.7	3.82	13	312	416	9,984	260	468	9,360	0.7194
4.0"	25.0	4.40	11	264	352	8,448	220	396	7,920	0.8034

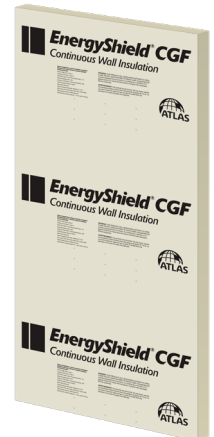

GENERAL INFORMATION

- EnergyShield and EnergyShield CGF products that are 1" and under are shipped in 24" high packages and are loaded 48 packages per load.
- EnergyShield and EnergyShield CGF products that are over 1" are shipped in 48" high packages and are loaded 24 packages per load.
- Truckload quantities vary when lengths are mixed.
- Standard 48' Truck.
- Minimum order quantities and extended lead times may apply.


¹ Conditioned thermal values were determined by ASTM Test Method C 518 at 75° mean temperature. Test specimens were conditioned in accordance with procedures outlined in ASTM C1289, Section 11.1.2.1.

² "R" means resistance to heat flow. The higher the R-value, the greater the insulating power.

EnergyShield® PanelCast™

Continuous Concrete Insulation


NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	PIECES PER TRUCKLOAD 4' x 9'	SQUARE FT. PER PACKAGE 4' x 9'	SQUARE FT. PER TRUCKLOAD 4' x 9'	WEIGHT (LB/SF)
0.5"	3.0	0.53	86	2,064	2,752	66,048	1,720	3,096	61,920	0.2564
0.75"	4.5	0.79	58	1,392	1,856	44,544	1,160	2,088	41,760	0.2852
1.0"	6.0	1.06	48	1,152	1,536	36,864	960	1,728	34,560	0.3214
1.5"	9.0	1.58	31	744	992	23,808	620	1,116	22,320	0.4014
2.0"	12.1	2.13	23	552	736	17,664	460	828	16,560	0.4794
2.5"	15.3	2.69	18	432	576	13,824	360	648	12,960	0.5604
3.0"	18.5	3.26	15	360	480	11,520	300	540	10,800	0.6399
3.5"	21.7	3.82	13	312	416	9,984	260	468	9,360	0.7194
4.0"	25.0	4.40	11	264	352	8,448	220	396	7,920	0.8034

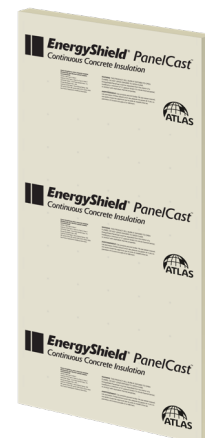

EnergyShield® PanelCast™ Tri-Lam

Continuous Concrete Insulation

NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	WEIGHT (LB/SF)
1.0"	6.5	1.14	48	1,152	1,536	36,864	0.1980
1.5"	9.8	1.73	31	744	992	23,808	0.2808
2.0"	13.1	2.31	23	552	736	17,664	0.3558
2.5"	16.0	2.82	19	456	608	14,592	0.4309
3.0"	19.7	3.47	15	360	480	11,520	0.5060
3.5"	22.2	3.91	13	312	416	9,984	0.5808
4.0"	26.0	4.58	11	264	352	8,448	0.6558

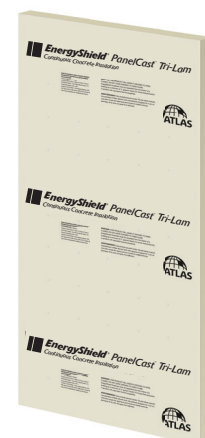

GENERAL INFORMATION

- EnergyShield PanelCast and EnergyShield PanelCast Tri-Lam products are shipped in 48" high packages and are loaded 24 packages per load.
- Truckload quantities vary when lengths are mixed.
- Standard 48' Truck.
- Minimum order quantities and extended lead times may apply.

¹Conditioned thermal values were determined by ASTM Test Method C 518 at 75° mean temperature. Test specimens were conditioned in accordance with procedures outlined in ASTM C1289, Section 11.1.2.1.

²"R" means resistance to heat flow. The higher the R-value, the greater the insulating power.

EnergyShield® Pro

Continuous Wall Insulation

NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	PIECES PER TRUCKLOAD 4' x 9'	SQUARE FT. PER PACKAGE 4' x 9'	SQUARE FT. PER TRUCKLOAD 4' x 9'	WEIGHT (LB/SF)
0.5"	3.3	0.58	86	2,064	2,752	66,048	1,720	3,096	61,920	0.1702
0.75"	5.0	0.88	58	1,392	1,856	44,544	1,160	2,088	41,760	0.2224
1.0"	6.5	1.14	45	1,080	1,440	34,560	900	1,620	32,400	0.2802
1.2"	7.5	1.32	39	936	1,248	29,952	780	1,404	28,080	0.3298
1.5"	9.8	1.73	30	720	960	23,040	600	1,080	21,600	0.4042
1.6"	10.5	1.85	27	648	864	20,736	540	972	19,440	0.4290
2.0"	13.1	2.31	22	528	704	16,896	440	792	15,840	0.5282
2.5"	16.0	2.82	18	432	576	13,824	360	648	12,960	0.6522
3.0"	19.7	3.47	15	360	480	11,520	300	540	10,800	0.7762
3.5"	22.2	3.91	13	312	416	9,984	260	468	9,360	0.9002
4.0"	26.0	4.58	11	264	352	8,448	220	396	7,920	1.0242



EnergyShield® CGF Pro

Continuous Wall Insulation

NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	PIECES PER TRUCKLOAD 4' x 9'	SQUARE FT. PER PACKAGE 4' x 9'	SQUARE FT. PER TRUCKLOAD 4' x 9'	WEIGHT (LB/SF)
0.5"	3.0	0.53	86	2,064	2,752	66,048	1,720	3,096	61,920	0.2799
0.75"	4.5	0.79	58	1,392	1,856	44,544	1,160	2,088	41,760	0.319
1.0"	6.0	1.06	45	1,080	1,440	34,560	900	1,620	32,400	0.3624
1.5"	9.0	1.59	30	720	960	23,040	600	1,080	21,600	0.4554
2.0"	12.1	2.13	22	528	704	16,896	440	792	15,840	0.5484
2.5"	15.3	2.69	18	432	576	13,824	360	648	12,960	0.6414
3.0"	18.5	3.26	15	360	480	11,520	300	540	10,800	0.7344
3.5"	21.7	3.82	13	312	416	9,984	260	468	9,360	0.8274
4.0"	25.0	4.40	11	264	352	8,448	220	396	7,920	0.9204



GENERAL INFORMATION

- EnergyShield Pro products are shipped in 48" high packages and are loaded 24 packages per load.
- EnergyShield CGF Pro products are shipped in 48" high packages and are loaded 24 packages per load.
- Truckload quantities vary when lengths are mixed.
- Standard 48' Truck.
- Minimum order quantities and extended lead times may apply.

¹ Conditioned thermal values were determined by ASTM Test Method C 518 at 75° mean temperature. Test specimens were conditioned in accordance with procedures outlined in ASTM C1289, Section 11.1.2.1.


² "R" means resistance to heat flow. The higher the R-value, the greater the insulating power.

EnergyShield® Ply Pro

Continuous Wall Insulation

5/8" Fire Treated Plywood Composite

FOAM THICKNESS	FOAM R-VALUE ^{1,2}	FOAM RSI	COMPOSITE PANEL THICKNESS	COMPOSITE R-VALUE ³	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	WEIGHT (LB/SF)
1.0"	6.0	1.20	1.625"	6.8	29	696	928	22,272	2.5812
1.5"	9.0	1.73	2.125"	9.8	22	528	704	16,896	2.6742
2.0"	12.1	2.27	2.625"	12.9	17	408	544	13,056	2.7341
2.5"	15.3	2.84	3.125"	16.1	15	360	480	11,520	2.8602
3.0"	18.5	3.40	3.625"	19.3	13	312	416	9,984	2.9532
3.5"	21.7	3.96	4.125"	22.5	10	240	320	7,680	3.0462
4.0"	25.0	4.54	4.625"	25.8	9	216	288	6,912	3.1392

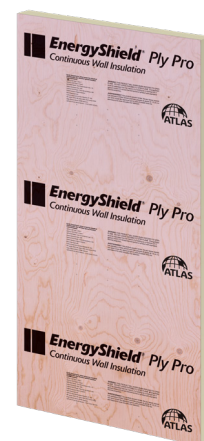


EnergyShield® Ply Pro

Continuous Wall Insulation

3/4" Fire Treated Plywood Composite

FOAM THICKNESS	FOAM R-VALUE ^{1,2}	FOAM RSI	COMPOSITE PANEL THICKNESS	COMPOSITE R-VALUE ³	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	WEIGHT (LB/SF)
1.0"	6.0	1.22	1.75"	6.9	26	624	832	19,968	2.8312
1.5"	9.0	1.74	2.25"	9.9	20	480	640	15,360	2.9242
2.0"	12.1	2.29	2.75"	13.0	17	408	544	13,056	3.0172
2.5"	15.3	2.85	3.25"	16.2	14	336	448	10,752	3.1102
3.0"	18.5	3.42	3.75"	19.4	12	288	384	9,216	3.2032
3.5"	21.7	3.98	4.25"	22.6	10	240	320	7,680	3.2962
4.0"	25.0	4.56	4.75"	25.9	9	216	288	6,912	3.3892

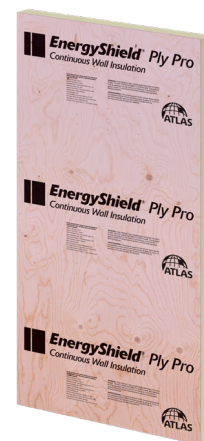

GENERAL INFORMATION

- EnergyShield Ply Pro products are shipped in 48" high packages and are loaded 24 packages per load.
- Standard 48' Truck.
- Minimum order quantities and extended lead times may apply.

¹ Conditioned thermal values were determined by ASTM Test Method C 518 at 75° mean temperature. Test specimens were conditioned in accordance with procedures outlined in ASTM C1289, Section 11.1.2.1.

² "R" means resistance to heat flow. The higher the R-value, the greater the insulating power.

³ Plywood R-Value Per 2009 ASHRAE Handbook of Fundamentals, Chapter 26, Table 4: 5/8" FRTP R-Value 0.78, 3/4" FRTP R-Value 0.94.




EnergyShield® Ply

Continuous Wall Insulation

5/8" Plywood Composite

FOAM THICKNESS	FOAM R-VALUE ¹²	FOAM RSI	COMPOSITE R-VALUE ³	COMPOSITE PANEL THICKNESS	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	WEIGHT (LB/SF)
0.5"	3.0	0.53	3.8	1.125"	42	1008	1344	32,256	2.4987
1.0"	6.0	1.06	6.8	1.625"	29	696	928	22,272	2.5812
1.5"	9.0	1.59	9.8	2.125"	22	528	704	16,896	2.6742
2.0"	12.1	2.13	12.9	2.625"	17	408	544	13,056	2.7341

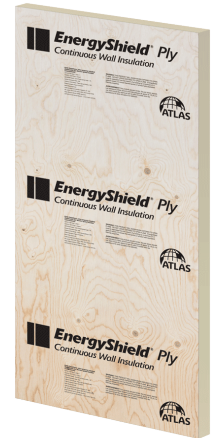


EnergyShield® Ply

Continuous Wall Insulation

3/4" Plywood Composite

FOAM THICKNESS	FOAM R-VALUE ¹²	FOAM RSI	COMPOSITE R-VALUE ³	COMPOSITE PANEL THICKNESS	PIECES PER PACKAGE	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	WEIGHT (LB/SF)
0.5"	3.0	0.53	3.8	1.250"	36	864	1152	27,648	2.5689
1.0"	6.0	1.06	6.8	1.750"	26	624	832	19,968	2.6339
1.5"	9.0	1.59	9.8	2.250"	20	480	640	15,360	2.7139
2.0"	12.1	2.13	12.9	2.750"	16	384	512	12,288	2.7919

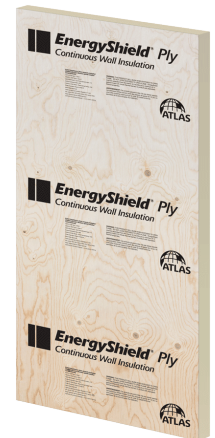

GENERAL INFORMATION


- EnergyShield Ply products are shipped in 48" high packages and are loaded 24 packages per load.
- Standard 48' Truck.
- Minimum order quantities and extended lead times may apply.

¹Conditioned thermal values were determined by ASTM C518 Test Method at 75° mean temperature. Test specimens were conditioned in accordance with procedures outlined in ASTM C1289, Section 11.1.2.1.

²"R" means resistance to heat flow. The higher the R-value, the greater the insulating power.

³Plywood R-values obtained from APA-Engineered Wood Construction Guide

NOMINAL THICKNESS	R-VALUE ^{1,2}	RSI	PIECES PER PACKAGE 4' x 8'	PIECES PER TRUCKLOAD 4' x 8'	SQUARE FT. PER PACKAGE 4' x 8'	SQUARE FT. PER TRUCKLOAD 4' x 8'	WEIGHT (LB/SF)
0.75"	5.0	0.88	30	1440	960	46,080	0.1599
1.0"	6.5	1.14	23	1,104	736	35,328	0.1998
1.2"	7.5	1.32	19	912	608	29,184	0.2328
1.5"	10.0	1.76	30	720	960	23,040	0.2906
2.0"	13.1	2.31	23	552	736	17,664	0.3498
2.4"	15.4	2.71	19	456	608	14,592	0.4128
3.0"	19.7	3.47	15	360	480	11,520	0.5073
3.5"	22.2	3.91	13	312	416	9,984	0.5861
4.0"	26.0	4.58	11	264	352	8,448	0.6648

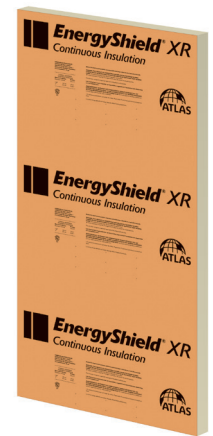

GENERAL INFORMATION

- EnergyShield XR is available prescored at 16" and 24" on center.
- EnergyShield XR products that are 1" and under are shipped in 24" high packages and are loaded 48 packages per load.
- EnergyShield XR products that are over 1" and under are shipped in 48" high packages and are loaded 24 packages per load.
- Standard 48' Truck.
- Minimum order quantities and extended lead times may apply.

¹Conditioned thermal values were determined by ASTM C518 Test Method at 75° mean temperature. Test specimens were conditioned in accordance with procedures outlined in ASTM C1289, Section 11.1.2.1.

²"R" means resistance to heat flow. The higher the R-value, the greater the insulating power.



CONTACT US:

ATLAS ROOFING CORPORATION

Corporate Sales and Marketing

2100 RiverEdge Parkway, Suite 600, Atlanta, GA 30328

(770) 952-1442

wall.atlasrwi.com

Sales Offices:

1. Vancouver, BC
(855) 265-1476

2. Toronto, ON
(888) 647-1476



3. Denver, CO
(800) 288-1476

4. East Moline, IL
(800) 677-1476



5. Camp Hill, PA
(800) 688-1476

6. Phoenix, AZ
(800) 477-1476

7. Diboll, TX
(800) 766-1476

8. LaGrange, GA
(800) 955-1476

