


Pre-Cut Hips and Valleys

Ready to install, Pre-Cut Hips and Valleys are designed specifically for four-way tapered Polyiso installations. Pre-Cut Hips (slope outward) and Pre-Cut Valleys (slope inward) are factory-produced using two 4' x 4' panels of Tapered InsulBase® or Tapered SecurShield® and then cut in half at a 45-degree angle. Only the material needed for the job is shipped.

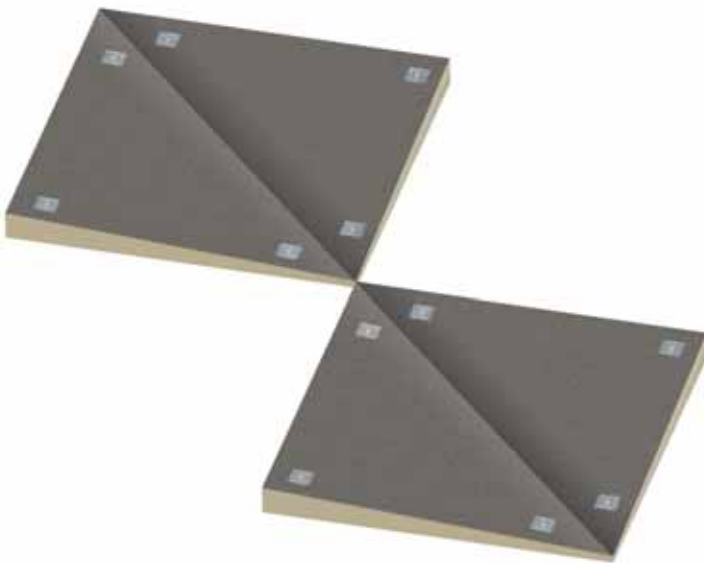

FEATURES AND BENEFITS

- » Labor savings – no field cuts required
- » No waste, reducing material removal fees on jobsite
- » Individually packaged and labeled
- » Custom-designed to meet job-specific requirements, including slope and minimum and maximum thicknesses


ADVANTAGES

- » Clean factory-cut edges
- » Less material to ship, hoist, stack, and move
- » Saves labor – no cutting necessary
- » Less waste


AVAILABLE IN SLOPES

- » 1/16" (2mm)
- » 3/16" (5mm)
- » 3/8" (10mm)
- » 1/8" (3mm)
- » 1/4" (6mm)
- » 1/2" (12mm)

VALLEY FIELD FABRICATION

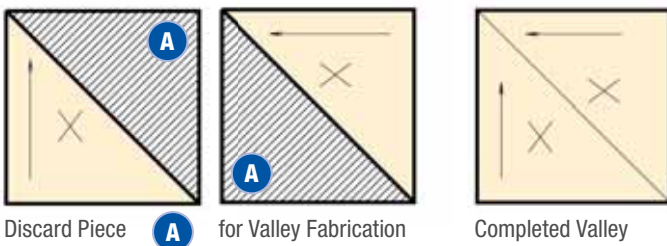

HIP FIELD FABRICATION

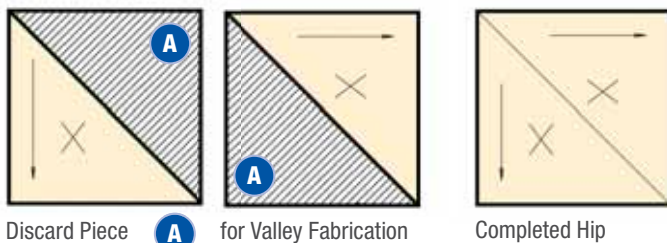

Project Specifications

Roof Area 401 squares
Tapered Insulation Slope 1/4" per foot; 1/2" minimum at drains

Field Fabricated Hips and Valleys		Pre-Cut Hips and Valleys	
Tapered Quote	\$72,800	Tapered Quote	\$72,800
Hoist, stage and move 1/2 truck of additional waste (3 man-hours*)	\$150	Additional cost for Pre-Cut Hips and Valleys	\$2,800
Labor to cut 1 truck of tapered materials (84 man-hours*)	\$4,200		
Waste Removal Cost: 50 cubic yards	\$1,100		
	\$5,450		
TOTAL COST: \$78,250		TOTAL COST: \$75,600	

Savings from using Pre-Cut Hips and Valleys: \$2,650

*Man-hours calculated at \$50.00