



## Typical He-Bolt Anchors


These Dayton Superior anchors are effectively used in conjunction with the D-40 He-Bolt to anchor cantilever forms. The B-18 Single Flared Coil Loop Insert is recommended for 5' lifts, the B-33 Double Flared Coil Loop Insert is recommended for 5' to 7-1/2' lifts and the B-43 Triple Flared Coil Loop Insert is recommended for 7-1/2' to 10' lifts.

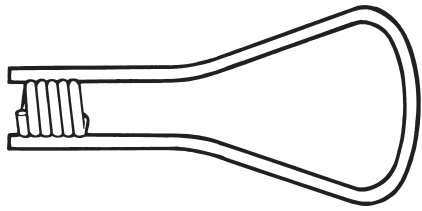

**B-18 Single Flared Coil Loop Insert**

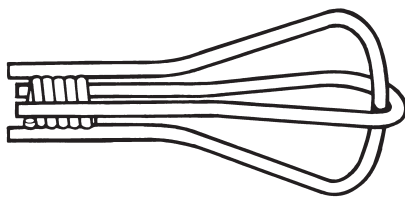

**B-33 Double Flared Coil Loop Insert**

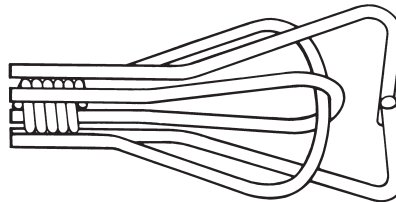

**B-43 Triple Flared Coil Loop Insert**

- See B-18 Single Flared Coil Loop Insert on page 65.
- See B-33 Double Flared Coil Loop Insert on page 69.
- See B-43 Triple Flared Coil Loop Insert on page 71.

**To Order:**


Specify: (1) quantity, (2) name, (3) bolt diameter, (4) length, (5) safe working load, (6) finish (plain or Electroplated).

**Example:**


450 pcs. B-18 Single Flared Coil Loop, 1" x 9" long, 9,500 lbs. SWL, plain.

## Special He-Bolt Inserts


Special inserts can be manufactured to meet your unusual forming requirements. Please contact a Dayton Superior Technical Service Department with your requirements. Several special inserts that have been developed are shown below.

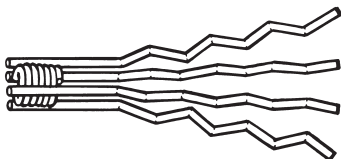

**B-7 Two Strut  
B-22 Four Strut**

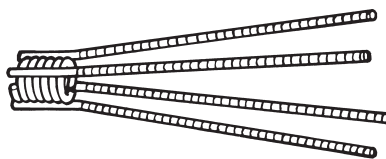

**B-34-4  
Four Strut**

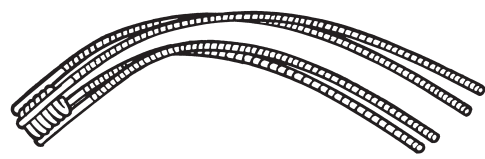

**Four Strut  
Draped Insert**