

EPCON

A7

C6

G5

ADHESIVES



RED HEAD[®]

CONCRETE ANCHORING SPECIALISTS

Submittal Information

Trubolt[®]
Wedge Anchors

LDT
Self-Threading Anchors

Multi-Set II[®]
Drop-In Anchors

Boa[™] Coil
Expansion Anchors

Prima
High Expansion Sleeve Anchors

Dynabolt[®]
Sleeve Anchors

Stud
Hammer-Driven Anchors

Redi-Drive[®]
Masonry Anchors

Tapcon[®]
Concrete & Masonry Anchors

September 2010



SUBMITTAL/SUBSTITUTION REQUEST

TO: _____

PROJECT: _____

SPECIFIED ITEM:

Section	Page	Paragraph	Description
---------	------	-----------	-------------

SUBMITTAL/SUBSTITUTION: _____

Attached data includes product description, specifications, drawings, performance data adequate for evaluation of the request; applicable portions of the data are clearly identified.

SUBMITTED BY:

For use by the Architect and/or Engineer

Name: _____

Approved Approved as Noted

Signature: _____

Not Approved

Firm: _____

(Please briefly explain why not approved.)

Address: _____

By: _____

Date: _____

Date: _____

Telephone: _____

Remarks: _____

Fax: _____

APPENDIX C: Strength Design Performance values in accordance to 2006 and 2009 IBC

ITW RED HEAD TRUBOLT+ WEDGE ANCHOR DESIGN INFORMATION TESTED TO ICC-ES AC 193

AND ACI 355.2, IN ACCORDANCE WITH 2006 and 2009 IBC



TRUBOLT+ WEDGE ANCHOR DESIGN INFORMATION¹

Characteristic	Symbol	Units	Nominal Anchor Diameter (inch) ⁴							
			3/8"		1/2"		5/8"		3/4"	
Anchor category	1, 2 or 3	—	1		1		1		1	
Minimum effective embedment depth	h_{ef}	in	1-5/8		2		3-1/4		2-3/4, 4-1/4, 3-3/4	
Minimum concrete member thickness	h_{min}	in	4	5	4	6	6	8	6	6-1/4, 7, 8
Critical edge distance	c_{ac}	in	5	3	6	6	7-1/2	6	7-1/2	6-1/2, 12, 10
Data for Steel Strengths – Tension and Shear										
Minimum specified yield strength	f_y	psi	60,000		55,000		55,000		55,000	
Minimum specified ultimate strength	f_{uta}	psi	75,000		75,000		75,000		75,000	
Effective tensile stress area (neck)	A_{se}	in ²	0.056		0.119		0.183		0.266	
Effective tensile stress area (thread)	A_{se}	in ²	0.075		0.142		0.217		0.332	
Steel strength in tension	H_{sa}	lbf	4,200		8,925		13,725		19,950	
Steel strength in shear, uncracked or cracked concrete ⁴	V_{sa}	lbf	1,830		5,175		8,955		14,970	
Steel strength in shear – seismic loads	V_{eq}	lbf	1,545		5,175		8,955		11,775	
Strength reduction factor f for tension, steel failure modes ⁴			0.75		0.75		0.75		0.75	
Strength reduction factor f for shear, steel failure modes ²			0.60		0.65		0.65		0.65	
Data for Concrete Breakout Concrete Pryout Strengths in Tension and Shear										
Effectiveness factor – uncracked concrete	k_{uncr}	—	24		24		24		24	
Effectiveness factor – cracked concrete	k_{cr}	—	17		17		17		17	
Modification factor for cracked and uncracked concrete ³	Ψ_{CN}	—	1.0		1.0		1.0		1.0	
Coefficient for pryout strength	k_{cp}	—	1.0		1.0		2.0		2.0	
Load-bearing length of anchor	l_e	in	1.625		2.0		3.25		2.75, 4.25, 3.75	
Strength reduction factor ϕ for tension, concrete failure modes, Condition B ²			0.65		0.65		0.65		0.65	
Strength reduction factor ϕ for shear, concrete failure modes, Condition B ²			0.70		0.70		0.70		0.70	
Data for Pullout Strengths										
Pullout strength, uncracked concrete	$N_{p,uncr}$	lbf	See Footnote ⁵		See Footnote ⁵		6,540		5,430, 8,900, See Footnote ⁵	
Pullout strength, cracked concrete	$N_{p,cr}$	lbf	See Footnote ⁵		See Footnote ⁵		See Footnote ⁵		See Footnote ⁵	
Pullout strength for seismic loads	N_{eq}	lbf	See Footnote ⁵		See Footnote ⁵		See Footnote ³		6,715, See Footnote ⁵	
Strength reduction factor f for tension, pullout failure modes, Condition B ²			See Footnote ⁵		0.65		0.65		See Footnote ⁵	
Additional Anchor Data										
Axial stiffness in service load range in uncracked concrete	b_{uncr}	lbf/in	100,000		750,000		250,000		750,000	
Axial stiffness in service load range in cracked concrete	b_{cr}	lbf/in	40,000		20,000		20,000		20,000	

For SI: 1 inch = 25.4 mm, 1 in² = 645.16mm², 1 lbf = 4.45 N, 1 psi = 0.006895 MPa, 1 lbf · 102/in = 17,500 N/m.

¹ The 1/2", 3/8" and 3/4" diameter Trubolt+ Wedge Anchors are ductile steel elements as defined by ACI 318 D.1. The 3/8" diameter Trubolt+ is considered ductile under tension loading and brittle under shear loading.

² All values of ϕ apply to the load combinations of IBC Section 1605.2, ACI 318 Section 9.2 or UBC Section 1612.2. If the load combinations of Appendix C or UBC Section 1909.2 are used, the appropriate value of ϕ must be determined in accordance with ACI 318 D.4.5. For installations where reinforcement that complies with ACI 318 Appendix D requirements for Condition A is present, the appropriate ϕ factor must be determined in accordance with ACI 318 D.4.4.


³ For all design cases $\Psi_{CN} = 1.0$. The appropriate effectiveness factor for cracked concrete (k_{cr}) or uncracked concrete (k_{uncr}) must be used.

⁴ The actual diameter for the 3/8" diameter anchor is 0.361" for the 5/8" diameter anchor is 0.615" and the 3/4" diameter anchor is 0.7482".

⁵ Anchor pullout strength does not control anchor design. Determine steel and concrete capacity only.

⁶ Steel strength in shear values are based on test results per ACI 355.2, Section 9.4 and must be used for design.

TRUBOLT+ WEDGE ANCHOR (INSTALLED)

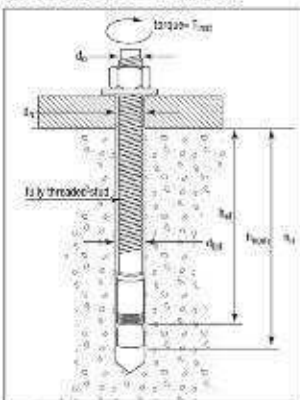

TRUBOLT+ WEDGE INSTALLATION INFORMATION

Parameter	Notation	Units	Nominal Anchor Diameter (inch)							
			3/8"		1/2"		5/8"		3/4"	
Anchor outer diameter	d_a	inches	0.361		0.5		0.615		0.7482	
Nominal carbide bit diameter	d_{bit}	inches	3/8		1/2		5/8		3/4	
Effective embedment depth	h_{ef}	inches	1-5/8		2		3-1/4		2-3/4, 4-1/4, 3-3/4	
Minimum anchor embedment depth	h_{nom}	inches	2		2-1/2		3-3/4		3-1/4, 4-3/4, 4-3/8	
Minimum hole depth ¹	h_a	inches	2-1/4		2-3/4		4		3-1/2, 5, 4-5/8	
Minimum concrete member thickness ¹	h_{min}	inches	4	5	4	6	6	8	6	6-1/4, 7, 8
Critical edge distance ¹	c_{ac}	in.	5	3	6	6	7-1/2	6	7-1/2	6-1/2, 12, 10
Minimum anchor spacing ¹	s_{min}	in.	3-1/2	2-1/2	6	5-3/4	4	5-3/4	8	6, 6, 6
Minimum edge distance ¹	c_{min}	in.	3		6		7-1/2		5, 7-1/2, 7-1/2	
Minimum overall anchor length	l	inches	2-1/2		3-3/4		4-1/2		4-1/4, 6, 5-1/2	
Installation torque	T_{inst}	ft-lb	30		45		90		110	
Minimum diameter of hole in fastened part	d_h	inches	1/2		5/8		3/4		7/8	

For SI: 1 inch = 25.4 mm, 1 ft-lb = 1.356 N-m.



Call our toll free number 800-899-7890 or visit our web site for the most current product and technical information at www.itwredhead.com

APPENDIX C: Strength Design Performance values in accordance to 2006 and 2009 IBC

TRUBOLT+ WEDGE ANCHOR ALLOWABLE STRESS DESIGN (ASD) VALUES FOR ILLUSTRATIVE PURPOSES

Anchor Notation	Anchor Embedment Depth	Effective Embedment Depth	Allowable Tension Load (lbs)
	(inches), h_{nom}	(inches), h_{ef}	
3/8	2	1-5/8	1,090
1/2	2-1/2	2	1,490
	3-3/4	3-1/4	2,870
5/8	3-1/4	2-3/4	2,385
	4-3/4	4-1/4	3,910
3/4	4-3/8	3-3/4	3,825

For SI: 1 inch = 25.4 mm, 1 lb = 4.45 N.

Design Assumptions:




- 1 Single anchor with static shear load only.
- 2 Load combinations from 2006 IBC, Sections 1605.2.1 and 1605.3.1 (no seismic loading).
- 3 Thirty percent dead load and 70 percent live load, controlling load combination 1.2D + 1.6L.
- 4 Calculation of weighted average: 1.2D + 1.6L = 1.2(0.3) + 1.6(0.7) = 1.48
- 5 Values do not include edge distance or spacing reductions.

ITW RED HEAD TRUBOLT+ WEDGE ANCHOR DESIGN INFORMATION FOR INSTALLATION IN THE SOFFIT OF CONCRETE FILL ON METAL DECK FLOOR AND ROOF ASSEMBLIES

TRUBOLT+ WEDGE ANCHOR DESIGN INFORMATION

Characteristic	Symbol	Units	Nominal Anchor Diameter				
			3/8"	1/2"		5/8"	
			Upper / Lower $h_{ef} = 1-5/8"$	Upper / Lower $h_{ef} = 2"$	Lower Only $h_{ef} = 3-1/4"$	Lower Only $h_{ef} = 2-3/4"$	Lower Only $h_{ef} = 4-1/4"$
Pullout strength, uncracked concrete over metal deck	$N_{p, deck, uncr}$	lbf	2,170	2,515	5,285	3,365	6,005
Pullout strength, cracked concrete over metal deck	$N_{p, deck, cr}$	lbf	1,650	1,780	4,025	2,405	5,025
Reduction factor for pullout strength in tension, Condition B	ϕ	—	0.65				
Shear strength, uncracked concrete over metal deck	$V_{p, deck, uncr}$	lbf	1,640	2,200	3,790	2,890	6,560
Reduction factor for steel strength in shear	ϕ	—	0.60	0.65			
Anchor embedment depth	h_{nom}	in	2.0	2.5	3.75	3.25	4.75

For SI: 1 inch = 25.4 mm, 1 lbf = 4.45 N

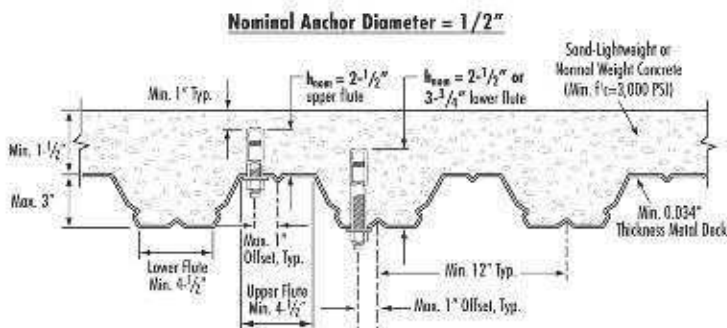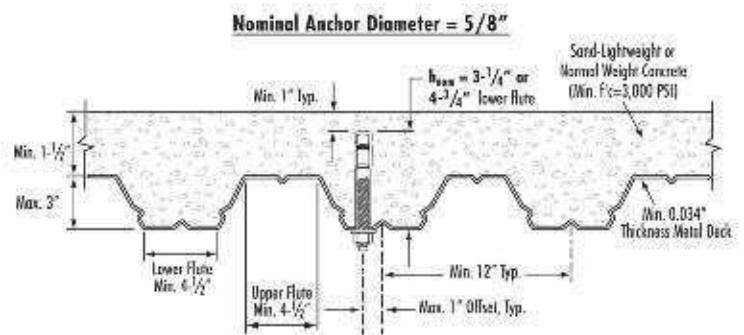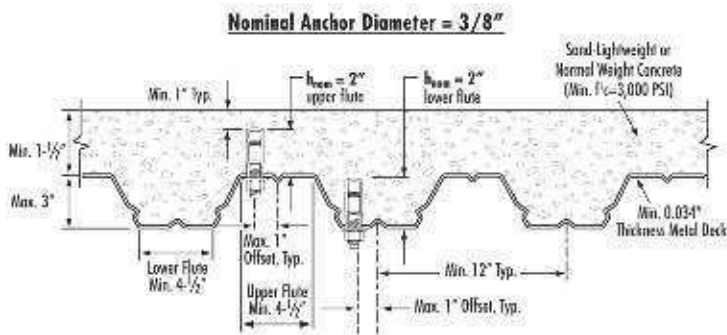

**2009 IBC
Compliant**

ITW Red Head

Call our toll free number 800-899-7890 or visit our web site for the most current product and technical information at www.itwredhead.com

APPENDIX B: Strength Design Performance values in accordance to 2006 IBC

ITW RED HEAD TRUBOLT WEDGE ANCHOR

DESIGN INFORMATION TESTED TO ICC-ES AC193 AND ACI 355.2, IN ACCORDANCE WITH 2006 IBC

Trubolt®
Wedge Anchors

TRUBOLT WEDGE ANCHOR DESIGN INFORMATION^{1,2,3}

DESIGN INFORMATION	Symbol	Units	Nominal Anchor Diameter									
			1/4		3/8		1/2		5/8		3/4	
Anchor O.D.	d_0	in	0.250		0.375		0.500		0.625		0.750	
Effective embedment	h_{ef}	in	1-1/2	2	1-3/4	2-5/8	1-7/8	3-3/8	2-1/2	4	3-1/2	4-3/4
Minimum member thickness	h_{min}	in	4	4	4	5	5	6	5	8	6	8
Critical edge distance	c_{ac}	in	2-5/8	3	2-5/8	5-1/4	3-3/4	6-3/4	5	8	7	9
Minimum edge distance	c_{min}	in	1-3/4	1-1/2	2-1/4	2	3-3/4	3-3/4	4-1/4	3-1/4	3-3/4	3-1/2
Minimum anchor spacing	s_{min}	in	1-3/4	1-1/2	2-1/4	2	3-3/4	3-3/4	4-1/4	3-1/4	3-3/4	3-1/2
Min. Specified Yield Strength	f_y	lb/in ²	55,000									
Min. Specified Ultimate Strength	f_{uta}	lb/in ²	75,000									
Effective tensile stress area	A_{se}	in ²	0.032		0.078		0.142		0.226		0.334	
Steel strength in tension	N_5	lb	2,385		5,815		10,645		16,950		25,050	
Steel strength in shear	V_5	lb	1,430		2,975	3,490	4,450	6,385	6,045	10,170	10,990	15,030
Pullout strength, uncracked concrete	$N_{p,uncr}$	lb	1,392	1,706	2,198	3,469	2,400	4,168	4,155	6,638	8,031	10,561
Anchor Category (All anchors are ductile)			1									
Effectiveness factor k_{uncr} , uncracked concrete			24									
Axial stiffness in service load range	β	lb/in	14,651	9,385	17,515	26,424	32,483	26,136	42,899	21,749	43,576	28,697
Coefficient for variation for axial stiffness in service load range			34	47	28	45	17	33	55	22	63	28
Strength reduction factor ϕ for tension, steel failure modes			0.75									
Strength reduction factor ϕ for shear, steel failure modes			0.65									
Strength reduction factor ϕ for tension, concrete failure modes, Condition B			0.65									
Strength reduction factor ϕ for shear, concrete failure modes, Condition B			0.70									


¹ Trubolt+ Anchor Design Strengths must be determined in accordance with ACI 318-05 Appendix D and this table

² The Trubolt+ Wedge Anchor is a ductile steel element as defined by ACI 318 D.1

³ 1/8", 3/8", & 1/2" diameter data is listed in ICC-ES ESR-2251.

Trubolt®
Wedge Anchors

TRUBOLT WEDGE ANCHOR (INSTALLED)

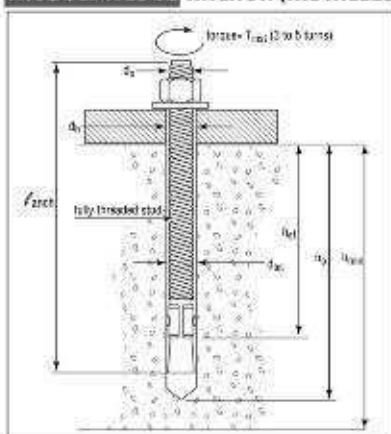

TRUBOLT WEDGE INSTALLATION INFORMATION

	Symbol	Units	Nominal Anchor Diameter (in.)									
			1/4		3/8		1/2		5/8		3/4	
Anchor outer diameter	d_0	in	0.25		0.375		0.5		0.625		0.750	
Nominal carbide bit diameter	d_{bit}	in	1/4		3/8		1/2		5/8		3/4	
Effective embedment depth	h_{ef}	in	1-1/2	2	1-3/4	2-5/8	1-7/8	3-3/8	2-1/2	4	3-1/2	4-3/4
Min hole depth	h_0	in	2	2-1/2	2-1/2	3-3/8	2-3/4	4-1/4	3-3/4	5-1/4	4-3/4	6
Min slab thickness	h_{min}	in	4	4	5	5	6	5	8	6	8	
Installation torque	T_{inst}	ft-lb	4		25		55		90		110	
Min hole diameter in fixture	d_h	in	5/16		7/16		9/16		11/16		13/16	



ITW Red Head

Call our toll free number 800-899-7690 or visit our web site for the most current product and technical information at www.itwredhead.com

APPENDIX B: Strength Design Performance values in accordance to 2006 IBC

Trubolt®
Wedge Anchors

TRUBOLT WEDGE PULLOUT STRENGTH (N_p, unc) (POUNDS) ¹

Nominal Anchor Diameter (in.)	Effective Embedment Depth (in.)	Concrete Compressive Strength			
		$f'_c = 2,500$ psi	$f'_c = 3,000$ psi	$f'_c = 4,000$ psi	$f'_c = 6,500$ psi
1/4	1-1/2	1,392	1,525	1,610	1,822
	2	1,706	1,869	1,947	2,151
3/8	1-3/4	2,198	2,408	2,621	3,153
	2-5/8	3,469	3,800	3,936	4,275
1/2	1-7/8	2,400	2,629	3,172	4,520
	3-3/8	4,168	4,520	4,520	4,520
5/8	2-1/2	4,155	4,155	4,376	5,578
	4	6,638	6,900	7,968	10,157
3/4	3-1/2	8,031	8,322	9,610	12,251
	4-3/4	10,561	10,561	10,561	12,251

For SI: 1 inch = 25.4 mm, 1 lbf = 4.45 N, 1 psi = 0.006895 Mpa

¹ Values are for single anchors with no edge distance or spacing reduction.

TRUBOLT WEDGE ANCHOR ALLOWABLE STATIC TENSION (ASD), NORMAL-WEIGHT UNCRACKED CONCRETE ¹⁻⁶

Nominal Anchor Diameter (in.)	Effective Embedment Depth (in.)	Concrete Compressive Strength			
		$f'_c = 2,500$ psi	$f'_c = 3,000$ psi	$f'_c = 4,000$ psi	$f'_c = 6,500$ psi
1/4	1-1/2	611	670	707	800
	2	749	821	855	945
3/8	1-3/4	965	1,058	1,151	1,385
	2-5/8	1,524	1,669	1,729	1,878
1/2	1-7/8	1,054	1,155	1,393	1,985
	3-3/8	1,831	1,985	1,985	1,985
5/8	2-1/2	1,825	1,825	1,922	2,450
	4	2,915	3,030	3,499	4,461
3/4	3-1/2	3,527	3,655	4,221	5,381
	4-3/4	4,638	4,638	4,638	5,381

For SI: 1 inch = 25.4 mm, 1 lbf = 4.45 N, 1 psi = 0.006895 Mpa

Design Assumptions:

- ¹ Single anchor with static tension load only.
- ² Concrete determined to remain uncracked for the life of the anchorage.
- ³ Load combinations from 2006 IBC, Sections 1605.2.1 and 1605.3.1 (no seismic loading).
- ⁴ Thirty percent dead load and 70 percent live load, controlling load combination $1.2D + 1.6L$.
- ⁵ Calculation of weighted average: $1.2D + 1.6L = 1.2(0.3) + 1.6(0.7) = 1.48$
- ⁶ Values do not include edge distance or spacing reductions.



TRUBOLT WEDGE ANCHOR ALLOWABLE STATIC SHEAR (ASD), STEEL (POUNDS) ¹⁻⁵

Nominal Anchor Diameter (in.)	Effective Embedment Depth (in.)	Allowable Steel Capacity, Static Shear
1/4	1-1/2	628
	2	
3/8	1-3/4	1,307
	2-5/8	1,533
1/2	1-7/8	1,954
	3-3/8	2,804
5/8	2-1/2	2,655
	4	4,467
3/4	3-1/2	4,827
	4-3/4	6,601

For SI: 1 inch = 25.4 mm, 1 lbf = 4.45 N, 1 psi = 0.006895 Mpa

Design Assumptions:

- ¹ Single anchor with static shear load only.
- ³ Load combinations from 2006 IBC, Sections 1605.2.1 and 1605.3.1 (no seismic loading).
- ³ Thirty percent dead load and 70 percent live load, controlling load combination $1.2D + 1.6L$.
- ⁴ Calculation of weighted average: $1.2D + 1.6L = 1.2(0.3) + 1.6(0.7) = 1.48$
- ⁵ Values do not include edge distance or spacing reductions.

ITW Red Head

Call our toll free number: 800-899-7890 or visit our web site for the most current product and technical information at www.itwredhead.com

Table of Contents

Adhesive Anchoring Systems 2



- Adhesive Anchoring Selection Guide 3
- A7 Adhesive 5
- A7 Adhesive for Sill Plate Attachments 12
- A7 Adhesive Chemical Resistance 16
- C6 Adhesive 17
- C6 Adhesive Chemical Resistance 23
- G5 Adhesive 24
- G5 Adhesive Chemical Resistance 29
- Umbrella Inserts and Stubby Screens 30
- Screen Tubes 33

Mechanical Anchoring Systems 36



- Trubolt Wedge and Trubolt+ Seismic Wedge Anchors 37
- Large Diameter Tapcon (LDT and LDTX) Anchors 40
- Multi-Set II Drop-in Anchors 44
- Boa Coil Expansion Anchors 46
- Prima High Expansion Sleeve Anchors 47
- Dynabolt Sleeve Anchors 49
- Stud Anchors 51
- Redi-Drive Anchors 52
- Tapcon Anchors 54

The information and recommendations in this document are based on the best information available to us at the time of preparation. We make no other warranty, expressed or implied, as to its correctness or completeness, or as to the results or reliance of this document.


RED HEAD

Adhesive Anchoring Systems



Adhesive Anchoring Selection Guide

COLD WEATHER USE and lower 0°F 20°F 50°F	HOT WEATHER USE 80°F 90°F 100°F and higher
A7 – BEST FORMULA	G5 – BEST FORMULA
C6 and G5	C6 and A7



Doweling into Concrete with Rebar



Fastening to Concrete with Threaded Rod

EPCON A7	EPCON C6	EPCON G5
Fast Dispensing, Fast Curing	Fast Curing for All Conditions	Extended Working Time
10:1 ACRYLIC	1:1 EPOXY	1:1 EPOXY
fast 35 minute cure time at 60°F 7 minute working time at 60°F	fast 1 hour cure time at 70°F 7 minute working time at 70°F	24 hour cure time per (AC308) PLUS extended 15 minute working time at 70°F
NSF STANDARD 61 Certified for drinking water applications	NSF STANDARD 61 Certified for drinking water applications	ODORLESS for indoor applications
COLD WEATHER no heating of cartridges required	Suitable for extreme temperature ranges	HOT WEATHER more time to install anchors

18 month shelf life

Damp holes
Underwater installations
Screens in hollow block and brick
Oversized holes will reduce loads
Cored-drilled holes will reduce load

2 year shelf life







Damp holes
Underwater installations
Screens in hollow block and brick
Oversized holes no reduction
Cored-drilled holes with no reduction

18 month shelf life

Damp holes
Underwater installations
Screens in hollow block and brick
Oversized holes no reduction
Cored-drilled holes with no reduction

Best Formula Suitable Formula Not Suitable

Solid Concrete Applications


PRODUCT SYSTEMS	KEY FEATURES	PROPERTIES	ULTIMATE TENSILE PERFORMANCE ^{1,2}																														
A7 Fast Dispensing, Fast Curing Acrylic Install more anchors in less time  5 fluid oz. (150 ml), 8 fluid oz. (235 ml), 10 fluid oz. (275 ml) and 28 fluid oz. (825 ml) cartridges (see page 5)	<ul style="list-style-type: none"> ■ Solid or hollow base materials ■ Dispenses easier and faster ■ Damp holes or underwater ■ Fastest cure (35 min. at 60°F) ■ Dispenses and cures faster in cold weather ■ Can be used in smaller diameter holes ■ No-drip formula reduces clean-up time ■ Hand dispensable 28-oz. cartridge 	<table border="1"> <thead> <tr> <th>BASE MATERIAL¹ (°F/°C)</th> <th>WORKING TIME</th> <th>FULL CURE TIME</th> </tr> </thead> <tbody> <tr><td>100°/38°</td><td>5 minutes</td><td>25 minutes</td></tr> <tr><td>80°/27°</td><td>5.5 minutes</td><td>30 minutes</td></tr> <tr><td>60°/16°</td><td>7 minutes</td><td>35 minutes</td></tr> <tr><td>40°/4°</td><td>15 minutes</td><td>75 minutes</td></tr> <tr><td>20°/-7°</td><td>35 minutes</td><td>6 hours</td></tr> <tr><td>0°/-18°</td><td>4 hours</td><td>24 hours</td></tr> </tbody> </table>	BASE MATERIAL ¹ (°F/°C)	WORKING TIME	FULL CURE TIME	100°/38°	5 minutes	25 minutes	80°/27°	5.5 minutes	30 minutes	60°/16°	7 minutes	35 minutes	40°/4°	15 minutes	75 minutes	20°/-7°	35 minutes	6 hours	0°/-18°	4 hours	24 hours	 <p>NSF[®] Certified to ANSINFSF 61</p> <p>3/8" x 3-3/8" 5/8" x 5-5/8" 1" x 9"</p> <p>10,980 26,500 48,210</p>									
BASE MATERIAL ¹ (°F/°C)	WORKING TIME	FULL CURE TIME																															
100°/38°	5 minutes	25 minutes																															
80°/27°	5.5 minutes	30 minutes																															
60°/16°	7 minutes	35 minutes																															
40°/4°	15 minutes	75 minutes																															
20°/-7°	35 minutes	6 hours																															
0°/-18°	4 hours	24 hours																															
C6 Fast Curing Epoxy for All Conditions Consistently handles all applications  18 fluid oz. (530 ml) cartridges (see page 17)	<ul style="list-style-type: none"> ■ NEW! Base Material Temperature 15°F (cartridge temperature must be ≥ 70°F) ■ Solid or hollow base materials ■ Hammer drilled or diamond cored holes ■ Oversized holes ■ Cold or warm weather ■ Damp holes or underwater ■ Horizontal or overhead installations ■ Fast curing epoxy (1 hour at 70°F) 	<table border="1"> <thead> <tr> <th>BASE MATERIAL¹ (°F/°C)</th> <th>WORKING TIME²</th> <th>FULL CURE TIME</th> </tr> </thead> <tbody> <tr><td>120°/49°</td><td>4 minutes</td><td>1 hour</td></tr> <tr><td>110°/43°</td><td>4 minutes</td><td>1 hour</td></tr> <tr><td>90°/32°</td><td>5 minutes</td><td>1 hour</td></tr> <tr><td>80°/26°</td><td>6 minutes</td><td>1 hour</td></tr> <tr><td>70°/21°</td><td>7 minutes</td><td>1 hour</td></tr> <tr><td>60°/16°</td><td>7 minutes</td><td>2 hours</td></tr> <tr><td>50°/10°</td><td>7 minutes</td><td>2 hours</td></tr> <tr><td>40°/4°</td><td>7 minutes</td><td>24 hours</td></tr> <tr><td>15°/-9°</td><td>6 minutes</td><td>24 hours</td></tr> </tbody> </table> <p>² Working time is max time from the end of mixing to when the insertion of the anchor into the adhesive shall be completed. Gel Time per ASTM D2471 = 10 minutes at 72°F.</p>	BASE MATERIAL ¹ (°F/°C)	WORKING TIME ²	FULL CURE TIME	120°/49°	4 minutes	1 hour	110°/43°	4 minutes	1 hour	90°/32°	5 minutes	1 hour	80°/26°	6 minutes	1 hour	70°/21°	7 minutes	1 hour	60°/16°	7 minutes	2 hours	50°/10°	7 minutes	2 hours	40°/4°	7 minutes	24 hours	15°/-9°	6 minutes	24 hours	 <p>NSF[®] Certified to ANSINFSF 61</p> <p>3/8" x 3-3/8" 5/8" x 5-5/8" 1" x 9"</p> <p>8,440 24,520 47,880</p>
BASE MATERIAL ¹ (°F/°C)	WORKING TIME ²	FULL CURE TIME																															
120°/49°	4 minutes	1 hour																															
110°/43°	4 minutes	1 hour																															
90°/32°	5 minutes	1 hour																															
80°/26°	6 minutes	1 hour																															
70°/21°	7 minutes	1 hour																															
60°/16°	7 minutes	2 hours																															
50°/10°	7 minutes	2 hours																															
40°/4°	7 minutes	24 hours																															
15°/-9°	6 minutes	24 hours																															
G5 High Strength Epoxy tested in accordance to ICC-ES AC308 15 min. working time; 24 hour cure time at 70°F  22 fluid oz. (650 ml) cartridge (see page 24)	<ul style="list-style-type: none"> ■ Solid base materials ■ Fire rated: tested up to 4hrs FRP ■ Works in dry, damp, saturated, and underwater applications ■ Gives more time to install anchors ■ Easier to install anchors in hot weather ■ Odorless ■ Oversized and cored holes ■ Improved wet/water filled ■ Resist wind loads 	<table border="1"> <thead> <tr> <th>BASE MATERIAL (°F/°C)</th> <th>WORKING TIME</th> <th>FULL CURE TIME</th> </tr> </thead> <tbody> <tr><td>110°/43°</td><td>9 minutes</td><td>24 hours</td></tr> <tr><td>90°/32°</td><td>9 minutes</td><td>24 hours</td></tr> <tr><td>70°/20°</td><td>15 minutes</td><td>24 hours</td></tr> <tr><td>50°/10°</td><td>15 minutes</td><td>24 hours</td></tr> </tbody> </table>	BASE MATERIAL (°F/°C)	WORKING TIME	FULL CURE TIME	110°/43°	9 minutes	24 hours	90°/32°	9 minutes	24 hours	70°/20°	15 minutes	24 hours	50°/10°	15 minutes	24 hours	 <p>RECOGNIZED WORLDWIDE Tested BS476 4 Hrs FRP</p> <p>International Standard Fire Resistance Performance</p> <p>3/8" x 3-3/8" 5/8" x 5-5/8" 1" x 9"</p> <p>8,369 20,880 53,331</p>															
BASE MATERIAL (°F/°C)	WORKING TIME	FULL CURE TIME																															
110°/43°	9 minutes	24 hours																															
90°/32°	9 minutes	24 hours																															
70°/20°	15 minutes	24 hours																															
50°/10°	15 minutes	24 hours																															

¹Diameter x Embedment in 4000 psi concrete.


²All loads given in pounds.

Hollow Base Material Applications





Use the following accessories with the A7 and C6 adhesive anchoring systems for all of your hollow base material applications.



Brick Pinning




Fastening to hollow concrete block

SYSTEM ACCESSORIES	KEY FEATURES	ULTIMATE TENSILE ^{1,2} PERFORMANCE (LBS)												
<h3>Nylon Screens</h3>  <p>Makes it possible to use adhesive for fastening to hollow block or brick walls (see page 33)</p>	<ul style="list-style-type: none"> 3/8" to 3/4" diameter sizes 30%-50% lower cost than stainless screens Special design makes screens easier to insert through block or brick Does not get bent or crushed Corrosion resistant 	<table border="1"> <tr> <th>A7</th> <th>C6</th> </tr> <tr> <td> <table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,360</td> <td>2,647</td> </tr> </table> </td> <td> <table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,800</td> <td>3,487</td> </tr> </table> </td> </tr> </table>	A7	C6	<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,360</td> <td>2,647</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,360	2,647	<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,800</td> <td>3,487</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,800	3,487
A7	C6													
<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,360</td> <td>2,647</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,360	2,647	<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,800</td> <td>3,487</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,800	3,487					
3/8" x 8"	3/4" x 8"													
2,360	2,647													
3/8" x 8"	3/4" x 8"													
2,800	3,487													
<h3>Stainless Steel Screens</h3>  <p>Makes it possible to use adhesive for fastening to hollow block or brick walls (see page 33)</p>	<ul style="list-style-type: none"> 1/4" to 3/4" diameter sizes Corrosion resistant Available in multiple lengths to accommodate various material thicknesses 	<table border="1"> <tr> <th>A7</th> <th>C6</th> </tr> <tr> <td> <table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,360</td> <td>2,647</td> </tr> </table> </td> <td> <table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,800</td> <td>3,487</td> </tr> </table> </td> </tr> </table>	A7	C6	<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,360</td> <td>2,647</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,360	2,647	<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,800</td> <td>3,487</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,800	3,487
A7	C6													
<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,360</td> <td>2,647</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,360	2,647	<table border="1"> <tr> <th>3/8" x 8"</th> <th>3/4" x 8"</th> </tr> <tr> <td>2,800</td> <td>3,487</td> </tr> </table>	3/8" x 8"	3/4" x 8"	2,800	3,487					
3/8" x 8"	3/4" x 8"													
2,360	2,647													
3/8" x 8"	3/4" x 8"													
2,800	3,487													
<h3>Stubby Screens</h3>  <p>Makes it possible to use adhesive for fastening to the face of hollow block or tile (see page 30)</p>	<ul style="list-style-type: none"> 1/4", 3/8", 1/2", 5/8" diameter sizes Fasten to front face of block Anchor remains perpendicular in wall 	<table border="1"> <tr> <th>A7</th> <th>C6</th> </tr> <tr> <td> <table border="1"> <tr> <th>1/2"</th> <th>5/8"</th> </tr> <tr> <td>2,458</td> <td>2,543</td> </tr> </table> </td> <td> <table border="1"> <tr> <th>1/2"</th> <th>5/8"</th> </tr> <tr> <td>1,873</td> <td>1,970</td> </tr> </table> </td> </tr> </table>	A7	C6	<table border="1"> <tr> <th>1/2"</th> <th>5/8"</th> </tr> <tr> <td>2,458</td> <td>2,543</td> </tr> </table>	1/2"	5/8"	2,458	2,543	<table border="1"> <tr> <th>1/2"</th> <th>5/8"</th> </tr> <tr> <td>1,873</td> <td>1,970</td> </tr> </table>	1/2"	5/8"	1,873	1,970
A7	C6													
<table border="1"> <tr> <th>1/2"</th> <th>5/8"</th> </tr> <tr> <td>2,458</td> <td>2,543</td> </tr> </table>	1/2"	5/8"	2,458	2,543	<table border="1"> <tr> <th>1/2"</th> <th>5/8"</th> </tr> <tr> <td>1,873</td> <td>1,970</td> </tr> </table>	1/2"	5/8"	1,873	1,970					
1/2"	5/8"													
2,458	2,543													
1/2"	5/8"													
1,873	1,970													
<h3>Umbrella and Umbrella Inserts</h3>  <p>Makes it possible to use adhesive for fastening to the face of hollow block or tile (see page 30)</p>	<ul style="list-style-type: none"> 1/4", 3/8", or 1/2" rods 3/8" internal inserts (HBU-FS) Fasten to front face of blocks Creates large bearing surface inside block to achieve high loads 	<table border="1"> <tr> <th>A7</th> <th>C6</th> </tr> <tr> <td> <table border="1"> <tr> <th>3/8"</th> <th>1/2"</th> </tr> <tr> <td>3,558</td> <td>3,558</td> </tr> </table> </td> <td> <table border="1"> <tr> <th>3/8"</th> <th>1/2"</th> </tr> <tr> <td>1,875</td> <td>1,875</td> </tr> </table> </td> </tr> </table>	A7	C6	<table border="1"> <tr> <th>3/8"</th> <th>1/2"</th> </tr> <tr> <td>3,558</td> <td>3,558</td> </tr> </table>	3/8"	1/2"	3,558	3,558	<table border="1"> <tr> <th>3/8"</th> <th>1/2"</th> </tr> <tr> <td>1,875</td> <td>1,875</td> </tr> </table>	3/8"	1/2"	1,875	1,875
A7	C6													
<table border="1"> <tr> <th>3/8"</th> <th>1/2"</th> </tr> <tr> <td>3,558</td> <td>3,558</td> </tr> </table>	3/8"	1/2"	3,558	3,558	<table border="1"> <tr> <th>3/8"</th> <th>1/2"</th> </tr> <tr> <td>1,875</td> <td>1,875</td> </tr> </table>	3/8"	1/2"	1,875	1,875					
3/8"	1/2"													
3,558	3,558													
3/8"	1/2"													
1,875	1,875													

¹ Testing performed in hollow concrete block. ² Diameter x Embedment.

A7 Adhesive

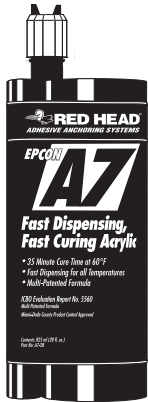

Fast Dispensing, Fast Curing Acrylic Adhesive

The acrylic resin and hardening agent are completely mixed as they are simultaneously dispensed from the dual cartridge through a static mixing nozzle, directly into the anchor hole. A7 can be used with threaded rod or rebar (for fastening to hollow base materials, see pages 30 and 33).




ADVANTAGES

- All weather formula
- No drip, no sag, easy clean up
- Fast & easy dispensing, even 28-oz. cartridges can be hand dispensed
- Fast curing time, 35 minutes at 60°F
- Not mix ratio sensitive
- NSF 61 Approved
- Rods are easier to insert into the hole with A7 compared with other adhesives
- Works in damp holes and underwater applications
- Requires less adhesive—can be used in 1/16" oversized or 1/8" oversized holes
- **One formula** for both hollow and solid base materials


Curing Times

BASE MATERIAL (F°/C°)	WORKING TIME	FULL CURE TIME
100°/ 38°	5 minutes	25 minutes
80°/ 27°	5.5 minutes	30 minutes
60°/ 16°	7 minutes	35 minutes
40°/ 4°	15 minutes	75 minutes
20°/ -7°	35 minutes	6 hours
0°/ -18°	4 hours	24 hours


INSTALLATION STEPS




1. Drill 1/16" oversize diameter holes for 1/4"–1/2" diameter threaded rods and #3 rebar. Drill 1/8" oversize diameter holes for 5/8"–1-1/4" diameter threaded rods, #4 rebar, grout filled blocks and brick pinning. Clean out hole from bottom with forced air. Complete hole preparation with brush and repeat cleaning with forced air (leave no dust or slurry).



2. When starting new cartridge or new nozzle, dispense and discard enough adhesive until uniform light grey color is achieved. Insert the nozzle into the bottom of the hole and fill to 1/2 the hole depth.



3. Insert rod slowly by hand into the bottom of the hole with a slow twisting motion. This insures adhesive fills voids and crevices and uniformly coats the anchor rod.



4. See table for working times and curing times. After the suggested cure time is met, install and tighten fixture into place.



Certified to
ANSI/NSF 61

APPROVALS/LISTINGS

ICC Evaluation Service, Inc. – #ER-5560

Miami-Dade County – #06-0425.02




City of Los Angeles – RR#25379




DOT Approvals

Florida Building Code

NSF Standard 61 Certified for Drinking Water Components

A7-28 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY
 A7-28	28 Fluid Ounce Cartridge A7	4
 E55	Mixing Nozzle for A7-28 and G5-22 Cartridge Nozzle diameter fits 3/8" to 5/8" holes. (overall length of nozzle 14")	24
 A102	Largest hand dispensable cartridge— still easy to dispense Hand Dispenser for A7-28 Cartridge	1

PART NUMBER	DESCRIPTION	BOX QTY
 RH7010	EPCON DRIVE Cordless, battery powered dispensing tool for the A7-28 Cartridge	1
 E25-6	6-Foot Straight Tubing (can cut to proper size) (.39 in I.D. x .43 in. O.D.)	6
 A200	Pneumatic Dispenser for A7-28 Cartridge	1

Plunger Repair Kit
Available for A102 Dispenser
Part No. A102RKIT



ESTIMATING TABLE

A7 Number of Anchoring Installations per Cartridge* 28 Fluid Ounce Cartridge Using Reinforcing Bar with A7 Adhesive in Solid Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
# 3	7/16	662.5	331.3	220.8	165.6	132.5	110.4	94.6	82.8	73.6	66.3	60.2	55.2	51.0	47.3	44.2
# 4	5/8	373.0	186.5	124.3	93.2	74.6	62.2	53.3	46.6	41.4	37.3	33.9	31.1	28.7	26.6	24.9
# 5	3/4	286.1	143.0	95.4	71.5	57.2	47.7	40.9	35.8	31.8	28.6	26.0	23.8	22.0	20.4	19.1
# 6	7/8	231.0	115.5	77.0	57.7	46.2	38.5	33.3	28.8	25.7	23.1	21.0	19.2	17.8	16.5	15.4
# 7	1	213.4	106.7	71.1	53.3	42.7	35.6	30.5	26.7	23.7	21.3	19.4	17.8	16.4	15.2	14.2
# 8	1-1/8	177.3	88.6	59.1	44.3	35.5	29.5	25.3	22.2	19.7	17.7	16.1	14.8	13.6	12.7	11.8
# 9	1-1/4	102.8	51.4	34.3	25.7	20.6	17.1	14.7	12.8	11.4	10.3	9.3	8.6	7.9	7.3	6.9
# 10	1-1/2	84.1	42.0	28.0	21.0	16.8	14.0	12.0	10.5	9.3	8.4	7.6	7.0	6.5	6.0	5.6
# 11	1-3/4	51.4	25.7	17.1	12.8	10.3	8.6	7.3	6.4	5.7	5.1	4.7	4.3	4.0	3.7	3.4

* The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.

ESTIMATING TABLE




CLAMPING FORCE PROVIDED ON PAGE 10

A7 Number of Anchoring Installations per Cartridge* 28 Fluid Ounce Cartridge Using Threaded Rod with A7 Adhesive in Solid Concrete

ROD In. (mm)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
1/4 (6.4)	5/16	915.5	457.7	305.2	228.9	183.1	152.8	130.8	114.4	101.7	91.5	83.2	76.3	70.4	65.4	61.0
3/8 (9.5)	7/16	530.0	265.0	176.7	132.5	106.0	88.3	75.7	66.3	58.9	53.0	48.2	44.2	40.8	37.9	35.3
1/2 (12.7)	9/16	381.4	190.7	127.1	95.4	76.3	63.6	54.5	47.7	42.4	38.1	34.7	31.8	29.3	27.2	25.4
5/8 (15.9)	11/16 3/4	273.6 195.6	136.8 97.8	91.2 65.1	68.4 48.8	54.7 39.0	45.6 32.5	39.1 27.9	34.2 24.4	30.4 21.7	27.4 19.5	24.9 17.7	22.8 16.3	21.0 15.0	19.5 13.9	18.2 13.0
3/4 (19.1)	13/16 7/8	192.9 154.4	96.5 77.2	64.3 51.5	48.2 38.6	38.6 30.9	32.2 25.7	27.6 22.1	24.1 19.3	21.4 17.2	19.3 15.4	17.5 14.0	16.1 12.9	14.8 11.9	13.8 11.0	12.9 10.3
7/8 (22.2)	15/16 1	185.1 128.0	92.6 64.0	61.7 42.8	46.3 32.0	37.0 25.6	30.9 21.4	26.8 18.3	23.1 16.0	20.6 14.2	18.5 12.8	16.8 11.6	15.4 10.7	14.2 9.9	13.2 9.2	12.3 8.5
1 (25.4)	1-1/16 1-1/8	158.3 105.2	79.2 52.6	52.8 35.2	39.6 26.3	31.7 21.1	26.4 17.6	22.6 15.0	19.8 13.2	17.6 11.7	15.8 10.5	14.4 9.6	13.2 8.8	12.2 8.1	11.3 7.6	10.6 7.0
1-1/4 (31.8)	1-5/16 1-3/8	101.3 80.0	50.7 40.0	33.8 26.6	25.3 20.0	20.3 15.9	16.9 13.3	14.5 11.4	12.7 10.0	11.3 8.9	10.1 8.0	9.2 7.2	8.4 6.6	7.8 6.1	7.2 5.7	6.8 5.3

* The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.

A7—10 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY
 A7-10	9.3 Fluid Ounce Cartridge with Nozzle	6
 A24	Mixing Nozzle for A7-10 Cartridge Nozzle diameter fits 3/8" to 5/8" holes (overall length of nozzle 6-3/8")	24
 A100	Hand Dispenser Designed for A7-10 Cartridge Contractor Quality 26:1 Thrust Ratio	1

PACKAGING

1. Disposable, self-contained cartridge system capable of dispensing both components in the proper mixing ratio
2. Acrylic components dispensed through a static mixing nozzle that thoroughly mixes the material and places the material at the base of the pre-drilled hole
3. Cartridge markings: Include manufacturer's name, batch number and best-used-by date, mix ratio by volume, ANSI hazard classification, and appropriate ANSI handling precautions

SUGGESTED SPECIFICATIONS

ACRYLIC ADHESIVE:

High Strength ACRYLIC ADHESIVE: USA Made, ARRA Certified

1. Two component methyl methacrylate adhesive, non-sag paste, moisture insensitive when cured, dark gray in color, and early gel and cure times.
2. Meets NSF Standard 61, certified for use in conjunction with drinking water systems.
3. Works in wet, damp, submerged holes.
4. Shelf life: Best if used within 18 months.
5. All weather, cure time (35 min. at 60°F).
6. Dispenses easier and faster.
7. Dispenses and cures faster in cold weather, but works in hot weather.
8. Pumpable at 0°F without preheating.
9. Formula for use in solid and hollow base materials.
10. Suitable for oversized and diamond cored holes with increased depths.
11. Quick insertion time = less labor cost.

ESTIMATING TABLES




A7 Number of Anchoring Installations per Cartridge* Using Reinforcing Bar and Threaded Rod with A7 Adhesive in Solid Concrete 10 Fluid Ounce Cartridge

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)			
		2 (50.8)	4 (101.6)	6 (152.4)	8 (203.2)
# 3	7/16	110	55	37	27
# 4	5/8	63	31	20	14
# 5	3/4	48	24	16	11
# 6	7/8	39	18	13	9
# 7	1	35	18	11	9
# 8	1-1/8	29	14	9	7

ROD In (mm)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)			
		2 (50.8)	4 (101.6)	6 (152.4)	8 (203.2)
3/8 (9.5)	7/16	88	44	28	22
1/2 (12.7)	9/16	65	31	22	16
5/8 (15.9)	11/16	46	22	14	11
	3/4	33	16	11	7
3/4 (19.1)	13/16	33	16	11	7
	7/8	26	13	9	7
7/8 (22.2)	15/16	31	14	11	7
	1	22	11	7	5
1 (25.4)	1-1/16	26	13	9	7
	1-1/8	18	9	5	3

* The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.

A7—8 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY
 A7-8	Fits Hilti® P2000 dispensing tools 8 Fluid Ounce Cartridge A7	12
 A24	Mixing Nozzle for A7-10 Cartridge Nozzle diameter fits 3/8" to 5/8" holes (overall length of nozzle 6-3/8")	24
 A101	Heavy-Duty Hand Dispenser for A7-8 Cartridge	1

Hilti® P2000 is a registered trademark of the Hilti Corp.

ESTIMATING TABLE

A7 Number of Anchoring Installations per Cartridge* 8 Fluid Ounce Cartridge Using Reinforcing Bar with A7 Adhesive in Solid Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
# 3	7/16	187.8	93.9	62.6	46.9	37.6	31.3	26.8	23.5	20.9	18.8	17.1	15.6	14.4	13.4	12.5
# 4	5/8	105.7	52.9	35.2	26.4	21.1	17.6	15.1	13.2	11.7	10.6	9.6	8.8	8.1	7.6	7.0
# 5	3/4	81.1	40.5	27.0	20.3	16.2	13.5	11.6	10.1	9.0	8.1	7.4	6.8	6.2	5.8	5.4
# 6	7/8	65.5	32.7	21.8	16.4	13.1	10.9	9.4	8.2	7.3	6.5	6.0	5.5	5.0	4.7	4.4
# 7	1	60.5	30.2	20.2	15.1	12.1	10.1	8.6	7.6	6.7	6.0	5.5	5.0	4.7	4.3	4.0
# 8	1-1/8	50.2	25.1	16.7	12.6	10.0	8.4	7.2	6.3	5.6	5.0	4.6	4.2	3.9	3.6	3.3
# 9	1-1/4	29.1	14.6	9.7	7.3	5.8	4.9	4.2	3.6	3.2	2.9	2.6	2.4	2.2	2.1	1.9
# 10	1-1/2	23.8	11.9	7.9	6.0	4.8	4.0	3.4	3.0	2.6	2.4	2.2	2.0	1.8	1.7	1.6
# 11	1-3/4	14.6	7.3	4.9	3.6	2.9	2.4	2.1	1.8	1.6	1.5	1.3	1.2	1.1	1.0	1.0

*The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.

ESTIMATING TABLE




CLAMPING FORCE PROVIDED ON PAGE 10




A7 Number of Anchoring Installations per Cartridge* 8 Fluid Ounce Cartridge Using Threaded Rod with A7 Adhesive in Solid Concrete

ROD In. (mm)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
1/4 (6.4)	5/16	259.5	129.7	86.5	64.9	51.9	43.2	37.1	32.4	28.8	25.9	23.6	21.6	20.0	18.5	17.3
3/8 (9.5)	7/16	150.2	75.1	50.1	37.6	30.0	25.0	21.5	18.8	16.7	15.0	13.7	12.5	11.6	10.7	10.0
1/2 (12.7)	9/16	108.1	54.1	36.0	27.0	21.6	18.0	15.4	13.5	12.0	10.8	9.8	9.0	8.3	7.7	7.2
5/8 (15.9)	11/16	77.6	38.8	25.9	19.4	15.5	12.9	11.1	9.7	8.6	7.8	7.1	6.5	6.0	5.5	5.2
	3/4	55.4	27.7	18.4	13.8	11.1	9.2	7.9	6.9	6.1	5.5	5.0	4.6	4.3	4.0	3.7
3/4 (19.1)	13/16	54.7	27.3	18.2	13.7	10.9	9.1	7.8	6.8	6.1	5.5	5.0	4.6	4.2	3.9	3.6
	7/8	43.6	21.8	14.6	10.9	8.8	7.3	6.3	5.5	4.9	4.4	4.0	3.6	3.4	3.1	2.9
7/8 (22.2)	15/16	52.5	26.2	17.5	13.1	10.5	8.7	7.5	6.6	5.8	5.2	4.8	4.4	4.0	3.7	3.5
	1	36.4	18.2	12.2	9.1	7.3	6.1	5.2	4.5	4.0	3.6	3.3	3.0	2.8	2.6	2.4
1 (25.4)	1-1/16	44.9	22.4	15.0	11.2	9.0	7.5	6.4	5.6	5.0	4.5	4.1	3.7	3.5	3.2	3.0
	1-1/8	34.4	17.2	12.0	8.6	7.5	6.0	5.0	4.3	3.7	3.3	3.0	2.7	2.5	2.3	2.1
1-1/4 (31.8)	1-5/16	28.7	14.4	9.6	7.2	5.7	4.8	4.1	3.6	3.2	2.9	2.6	2.4	2.2	2.1	1.9
	1-3/8	22.4	11.2	7.6	5.6	4.5	3.8	3.2	2.8	2.5	2.3	2.1	1.9	1.7	1.6	1.5

*The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.

A7—5 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY
 A7-5	5 Fluid Ounce Cartridge A7	12
 A500	Reusable Plastic Dispenser	12
 A500 Kit	Convenient Dispensing Kit Packaged in a Solid Plastic Shell with (1) A500 Plastic Dispenser (1) A7-5 Cartridge and (1) A24 Nozzle Nozzle diameter fits 3/8" to 5/8" holes	8


PART NUMBER	DESCRIPTION	BOX QTY
 A7-5	5 Fluid Ounce Cartridge A7	12
 A501	Reusable Caulking Gun Adaptor	12
 A501 Kit	Convenient Dispensing Kit Packaged in a Solid Plastic Shell with (1) A501 Caulking Gun Adaptor (1) A7-5 Cartridge and (1) A24 Nozzle Nozzle diameter fits 3/8" to 5/8" holes	8

A500 PLASTIC DISPENSER

Attaches directly to cartridge allowing for easy hand dispensing.
No extra tools are required.



Simple Assembly and Dispensing



1. Twist-lock dispenser onto cartridge.
2. Thread nozzle onto cartridge.
3. Turn lever in order to dispense adhesive.




A500 Kit

A501 CAULKING GUN ADAPTOR

Allows cartridge to work with most standard caulking guns (caulking gun supplied by contractor).



Simple Assembly and Dispensing



1. Push adaptor tightly against back of cartridge.
2. Thread nozzle onto cartridge.
3. Place assembly in caulking gun and dispense adhesive.



A501 Kit

ESTIMATING TABLES

A7 Number of Anchoring Installations per Cartridge* Using Reinforcing 5 Fluid Ounce Cartridge Bar and Threaded Rod with A7 Adhesive in Solid Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)				ROD In (mm)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)			
		2 (50.8)	4 (101.6)	6 (152.4)	8 (203.2)			2 (50.8)	4 (101.6)	6 (152.4)	8 (203.2)
# 3	7/16	60	30	20	15	3/8 (9.5)	7/16	48	24	16	12
# 4	5/8	34	17	11	8	1/2 (12.7)	9/16	35	17	12	9
# 5	3/4	26	13	9	6	5/8 (15.9)	11/16	25	12	8	6
# 6	7/8	21	10	7	5		3/4	18	9	6	4
# 7	1	19	10	6	5	3/4 (19.1)	13/16	18	9	6	4
# 8	1-1/8	16	8	5	4		7/8	14	7	5	4
						7/8 (22.2)	15/16	17	8	6	4
							1	12	6	4	3
						1 (25.4)	1-1/16	14	7	5	4
							1-1/8	10	5	3	2

* The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.

PERFORMANCE TABLE

A7 Average Ultimate Tension and Shear Loads^{1,2,3} Acrylic Adhesive for Threaded Rod Installed in Solid Concrete

THREADED ROD DIA. In. (mm)	DRILL HOLE DIAMETER In. (mm)	MAX. CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	EMBEDMENT IN CONCRETE In. (mm)	2000 PSI (13.8 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE	
				ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
3/8 (9.5)	7/16 (11.1)	13 - 18 (17-24)	1-1/2 (38.1)	---	---	3,734 (16.6)	4,126 (18.3)
			3-3/8 (85.7)	5,852 (26.0)	5,220 (23.2)	10,977 (48.8)	5,220 (23.2)
			4-1/2 (114.3)	7,729 (34.4)	5,220 (23.2)	11,661 (51.9)	5,220 (23.2)
1/2 (12.7)	9/16 (14.3)	22 - 25 (29-33)	2 (50.8)	---	---	6,022 (26.8)	8,029 (35.7)
			4-1/2 (114.3)	10,798 (48.0)	8,029 (35.7)	17,162 (76.3)	8,029 (35.7)
			6 (152.4)	14,210 (63.2)	8,029 (35.7)	17,372 (77.3)	8,029 (35.7)
5/8 (15.9)	11/16 (17.5) or 3/4 (19.1)	55 - 80 (74-108)	2-1/2 (63.5)	---	---	7,330 (32.6)	11,256 (50.1)
			5-5/8 (142.9)	16,417 (73.0)	15,967 (71.0)	26,504 (117.9)	15,967 (71.0)
			7-1/2 (190.5)	18,747 (83.4)	15,967 (71.0)	29,381 (130.7)	15,967 (71.0)
3/4 (19.1)	13/16 (20.6) or 7/8 (22.2)	106 - 160 (143-216)	3 (76.2)	---	---	8,634 (38.4)	20,126 (89.5)
			6-3/4 (171.5)	18,618 (82.8)	20,126 (89.5)	29,727 (132.2)	20,126 (89.5)
			9 (228.6)	23,934 (106.5)	20,126 (89.5)	37,728 (167.8)	20,126 (89.5)
7/8 (22.2)	15/16 (23.8) or 1 (25.4)	185 - 250 (250-338)	3-1/2 (88.9)	---	---	13,650 (60.7)	20,920 (92.9)
			7-7/8 (200.0)	---	29,866 (132.9)	44,915 (199.8)	29,866 (132.9)
			10-1/2 (266.7)	36,881 (164.1)	29,866 (132.9)	48,321 (215.0)	29,866 (132.9)
1 (25.4)	1-1/16 (27.0) or 1-1/8 (28.6)	276 - 330 (374-447)	4 (101.6)	---	---	16,266 (72.2)	33,152 (147.5)
			9 (228.6)	32,215 (143.3)	37,538 (167.0)	48,209 (214.5)	37,538 (167.0)
			12 (304.8)	46,064 (143.3)	37,538 (167.0)	63,950 (284.5)	37,538 (167.0)
1-1/4 (31.8)	1-5/16 (33.3) or 1-3/8 (34.9)	370 - 660 (501-894)	5 (127.0)	---	---	21,838 (97.1)	33,152 (147.5)
			11-1/4 (285.8)	45,962 (204.5)	58,412 (259.8)	56,715 (252.3)	58,412 (259.8)
			15 (381.0)	62,208 (276.7)	58,412 (259.8)	84,385 (375.4)	58,412 (259.8)

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances (see pages 14-15).

A7 Allowable Tension Loads¹ for Threaded Rod Installed in Acrylic Adhesive Solid Concrete

THREADED ROD DIA. In. (mm)	DRILL HOLE DIAMETER In. (mm)	MIN. EMBEDMENT DEPTH In. (mm)	ALLOWABLE TENSION LOAD BASED ON ADHESIVE BOND STRENGTH		ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH		
			2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE Lbs. (kN)	ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
3/8 (9.5)	7/16 (11.1)	1-1/2 (38.1)	---	934 (4.2)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
		3-3/8 (85.7)	1,460 (6.5)	2,740 (12.2)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
		4-1/2 (114.3)	1,930 (8.6)	2,915 (13.0)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
1/2 (12.7)	9/16 (14.3)	2 (50.8)	---	1,505 (6.7)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
		4-1/2 (114.3)	2,700 (12.0)	4,290 (19.1)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
		6 (152.4)	3,550 (15.8)	4,340 (19.3)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
5/8 (15.9)	11/16 (17.5) or 3/4 (19.1)	2-1/2 (63.5)	---	1,832 (8.2)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
		5-5/8 (142.9)	4,100 (18.3)	6,625 (29.5)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
		7-1/2 (190.5)	4,685 (20.8)	7,345 (32.7)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
3/4 (19.1)	13/16 (20.6) or 7/8 (22.2)	3 (76.2)	---	2,158 (9.6)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
		6-3/4 (171.5)	4,655 (20.7)	7,430 (33.1)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
		9 (228.6)	5,980 (26.6)	9,430 (42.0)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
7/8 (22.2)	15/16 (23.8) or 1 (25.4)	3-1/2 (88.9)	---	3,413 (15.2)	11,600 (51.6)	25,510 (113.5)	20,835 (92.7)
		7-7/8 (200.0)	---	11,230 (49.9)	11,600 (51.6)	25,510 (113.5)	20,835 (92.7)
		10-1/2 (266.7)	9,220 (41.0)	12,080 (53.7)	11,600 (51.6)	25,510 (113.5)	20,834 (92.7)
1 (25.4)	1-1/16 (27.0) or 1-1/8 (28.6)	4 (101.6)	---	4,067 (18.1)	15,180 (67.5)	31,620 (140.7)	26,560 (118.1)
		9 (228.6)	8,050 (35.8)	12,050 (53.6)	15,180 (67.5)	31,620 (140.7)	26,560 (118.1)
		12 (304.8)	11,515 (51.2)	15,985 (71.1)	15,180 (67.5)	31,620 (140.7)	26,560 (118.1)
1-1/4 (31.8)	1-5/16 (33.3) or 1-3/8 (34.9)	5 (127.0)	---	5,460 (24.3)	23,800 (105.9)	49,580 (220.6)	34,670 (154.2)
		11-1/4 (285.8)	11,490 (51.1)	14,175 (63.1)	23,800 (105.9)	49,580 (220.6)	34,670 (154.2)
		15 (381.0)	15,550 (69.2)	21,095 (93.8)	23,800 (105.9)	49,580 (220.6)	34,670 (154.2)

1 Use lower value of either bond or steel strength for allowable tensile load.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGES 6-8

A7
Acrylic Adhesive
Allowable Shear Loads¹ for Threaded Rod Installed in Solid Concrete

THREADED ROD DIA In. (mm)	DRILL HOLE DIAMETER In. (mm)	MIN. EMBEDMENT DEPTH In. (mm)	ALLOWABLE SHEAR LOAD BASED ON CONCRETE STRENGTH		ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH		
			2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE Lbs. (kN)	ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
3/8 (9.5)	7/16 (11.1)	1-1/2 (38.1)	---	1,031 (4.6)	1,040 (4.6)	2,170 (9.7)	1,995 (8.9)
		3-3/8 (85.7)	1,305 (5.8)	1,305 (5.8)	1,040 (4.6)	2,170 (9.7)	1,995 (8.9)
1/2 (12.7)	9/16 (14.3)	2 (50.8)	---	2,005 (8.9)	1,870 (8.3)	3,895 (17.3)	3,585 (15.9)
		4-1/2 (114.3)	2,005 (8.9)	2,005 (8.9)	1,870 (8.3)	3,895 (17.3)	3,585 (15.9)
5/8 (15.9)	11/16 (17.5) or 3/4 (19.1)	2-1/2 (63.5)	---	2,814 (12.5)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
		5-5/8 (142.9)	3,990 (17.8)	3,990 (17.8)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
3/4 (19.1)	13/16 (20.6) or 7/8 (22.2)	3 (76.2)	---	5,030 (22.4)	4,250 (18.9)	8,855 (39.4)	7,440 (33.1)
		6-3/4 (171.5)	5,030 (22.4)	5,030 (22.4)	4,250 (18.9)	8,855 (39.4)	7,440 (33.1)
7/8 (22.2)	15/16 (23.8) or 1 (25.4)	3-1/2 (88.9)	---	5,230 (23.3)	5,800 (25.8)	12,760 (56.8)	10,730 (47.7)
		7-7/8 (200.0)	7,465 (33.2)	7,465 (33.2)	5,800 (25.8)	12,760 (56.8)	10,730 (47.7)
1 (25.4)	1-1/16 (27.0) or 1-1/8 (28.6)	4 (101.6)	---	8,288 (36.9)	7,590 (33.8)	15,810 (70.3)	13,285 (59.1)
		9 (228.6)	9,385 (41.7)	9,385 (41.7)	7,590 (33.8)	15,810 (70.3)	13,285 (59.1)
1-1/4 (31.8)	1-5/16 (33.3) or 1-3/8 (34.9)	5 (127.0)	---	8,288 (36.9)	11,900 (52.9)	24,790 (100.3)	18,840 (83.8)
		11-1/4 (285.8)	14,600 (64.9)	14,600 (64.9)	11,900 (52.9)	24,790 (100.3)	18,840 (83.8)

1 Use lower value of either concrete or steel strength for allowable shear load.

A7
Acrylic Adhesive
Average Ultimate Tension and Shear Loads^{1,2} for Threaded Rod Installed in Grout Filled Concrete Block

THREADED ROD DIA. In. (mm)	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR LOCATION	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
1/2 (12.7)	5/8 (15.9)	4-1/4 (108.0)	ROUTED CELL	5,170 (23.0)	8,500 (37.8)
5/8 (15.9)	3/4 (19.1)	5 (127.0)	ROUTED CELL	6,320 (28.1)	10,850 (48.3)
3/4 (19.1)	7/8 (22.2)	6-5/8 (168.3)	ROUTED CELL	10,910 (48.5)	17,075 (76.0)

1 Allowable working loads for the single installations should not exceed 25% (an industry standard) capacity or the allowable load of the anchor rod. Loads based upon testing with ASTM A193, Grade B7 rods.

2 The tabulated values are for anchors installed at minimum 12 inch edge distance and minimum 8 inch spacing.


A7
Acrylic Adhesive
Average Ultimate Tension and Shear Loads¹ for Threaded Rod Installed in Grouted² Brick Masonry Constructed of Solid Red Brick Units

THREADED ROD DIA. In. (mm)	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR LOCATION	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
1/4 (6.4)	3/8 (9.5)	3-1/2 (88.9)	CENTER OF BRICK FACE	2,130 (9.5)	1,165 (5.2)
		6 (152.4)		3,575 (15.9)	1,550 (6.9)
3/8 (9.5)	1/2 (12.7)	3-1/2 (88.9)	CENTER OF BRICK FACE	2,130 (9.5)	4,150 (18.5)
		6 (152.4)		8,875 (39.5)	6,950 (30.9)
1/2 (12.7)	5/8 (15.9)	3-1/2 (88.9)	CENTER OF BRICK FACE	2,130 (9.5)	3,090 (13.7)
		6 (152.4)		12,155 (54.1)	7,910 (35.2)

1 Allowable working loads for the single installations should not exceed 25% (an industry standard) capacity or the allowable load of the anchor rod. Loads based upon testing with ASTM A193, Grade B7 rods.

2 Void between brick wythes was grouted solid; therefore the use of screens was not necessary.

A7 Adhesive for Sill Plate Attachments

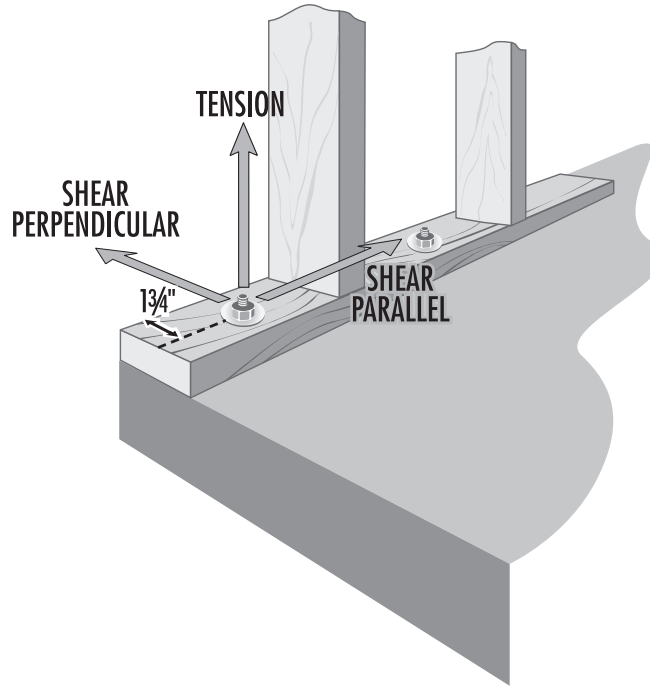

PERFORMANCE TABLE

A7 Average Ultimate Tension and Shear^{1,2,3} for Threaded Rods in Acrylic Adhesive Solid Concrete Floors and Stemwalls at 1-3/4" Edge Distance

ANCHOR DIAMETER	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT In. (mm)	2000PSI (13.8 MPa) CONCRETE		
			SHEAR LOAD DIRECTION	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
1/2 (12.7)	9/16 (14.3)	4-1/2 (114.3)	Perpendicular	9,180 (40.8)	1,760 (7.8)
			Parallel	9,180 (40.8)	7,240 (32.2)
5/8 (15.9)	11/16 (17.5) or 3/4 (19.1)	5-5/8 (142.9)	Perpendicular	13,620 (60.6)	2,540 (11.3)
			Parallel	13,620 (60.6)	8,778 (39.0)
	10 (254.0)	Perpendicular	20,700 (92.1)	2,540 (11.3)	
		Parallel	20,700 (92.1)	8,799 (39.1)	
3/4 (19.1)	13/16 (20.6) or 7/8 (22.2)	6-3/4 (171.4)	Perpendicular	15,080 (67.1)	2,080 (9.2)
			Parallel	29,940 (133.2)	2,080 (9.2)
7/8 (22.2)	15/16 (23.8) or 1 (25.4)	15 (381.0)	Perpendicular	29,940 (133.2)	2,080 (9.2)
			Parallel	29,940 (133.2)	7,101 (31.6)

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances (see pages 14-15).

PERFORMANCE TABLE

A7 Acrylic Adhesive

Allowable Tension Loads^{1,2} at 1-3/4" Edge Distance for Threaded Rods in Solid Concrete Floors and Stemwalls

DIAMETER In. (mm)	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH		
				ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
1/2 (12.7)	9/16 (14.3)	4-1/2 (114.3)	2,295 (10.2)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
5/8 (15.9)	11/16 (17.5)	5-5/8 (142.9)	3,405 (10.7)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
	or 3/4 (19.1)	10 (254.0)	5,175 (23.0)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
3/4 (19.1)	13/16 (20.6)	6-3/4 (171.4)	3,770 (16.8)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
	or 7/8 (22.2)					
7/8 (22.2)	15/16 (23.8)	15 (381.0)	7,485 (33.3)	11,600 (51.6)	25,510 (113.5)	20,835 (92.7)
	or 1 (25.4)					

1 Use lower value of either bond or steel strength for allowable tensile load.

2 Linear interpolation may be used for intermediate spacing and edge distances (see pages 14-15).

A7 Acrylic Adhesive

Allowable Shear Loads¹ at 1-3/4" Edge Distance for Threaded Rods in Solid Concrete Floors and Stemwalls

DIAMETER In. (mm)	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	SHEAR LOAD DIRECTION	2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH		
					ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
1/2 (12.7)	9/16 (14.3)	4-1/2 (114.3)	Perpendicular	440 (1.9)	1,870 (8.3)	3,895 (17.3)	3,585 (15.9)
			Parallel	1,810 (8.0)	1,870 (8.3)	3,895 (17.3)	3,585 (15.9)
5/8 (15.9)	11/16 (17.5)	5-5/8 (142.9)	Perpendicular	635 (2.8)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
			Parallel	2,195 (9.8)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
	or 3/4 (19.1)	10 (254.0)	Perpendicular	635 (2.8)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
			Parallel	2,200 (9.8)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
3/4 (19.1)	13/16 (20.6)	6-3/4 (171.4)	Perpendicular	600 (2.7)	4,250 (18.9)	8,855 (39.4)	7,440 (33.1)
	or 7/8 (22.2)						
7/8 (22.2)	15/16 (23.8)	15 (381.0)	Perpendicular	520 (2.3)	5,800 (25.8)	12,760 (56.8)	10,730 (47.7)
	or 1 (25.4)		Parallel	1,775 (7.9)	5,800 (25.8)	12,760 (56.8)	10,730 (47.7)

1 Use lower value of either concrete or steel strength for allowable shear load.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGES 6-8

A7
Acrylic Adhesive
**Average Ultimate Tension Loads^{1,2,3} for Reinforcing Bar
 Installed in Solid Concrete**

REINFORCING BAR DIA. In. (mm)	EMBEDMENT IN CONCRETE In. (mm)	2000 PSI (13.8 MPa) CONCRETE ULTIMATE TENSION Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE ULTIMATE TENSION Lbs. (kN)	ULTIMATE TENSILE AND YIELD STRENGTH GRADE 60 REBAR	
				MINIMUM YIELD STRENGTH Lbs. (kN)	MINIMUM ULTIMATE TENSILE STRENGTH Lbs. (kN)
# 3 (9.5)	3-3/8 (85.7)	6,180 (27.5)	8,324 (37.0)	6,600 (29.4)	9,900 (44.0)
	4-1/2 (114.3)	7,560 (33.6)	11,418 (50.8)	6,600 (29.4)	9,900 (44.0)
# 4 (12.7)	4-1/2 (114.3)	9,949 (44.3)	16,657 (74.1)	12,000 (53.4)	18,000 (80.1)
	6 (152.4)	15,038 (66.9)	17,828 (79.3)	12,000 (53.4)	18,000 (80.1)
# 5 (15.9)	5-5/8 (142.9)	14,012 (62.3)	20,896 (93.0)	18,600 (82.7)	27,900 (124.1)
	7-1/2 (190.5)	16,718 (74.4)	26,072 (116.0)	18,600 (82.7)	27,900 (124.1)
# 6 (19.1)	6-3/4 (171.5)	21,247 (94.5)	26,691 (118.7)	26,400 (117.4)	39,600 (176.2)
	9 (228.6)	33,325 (148.2)	37,425 (166.5)	26,400 (117.4)	39,600 (176.2)
# 7 (22.2)	7-7/8 (200.0)	-- --	40,374 (179.6)	36,000 (160.1)	54,000 (240.2)
	10-1/2 (266.7)	38,975 (173.4)	46,050 (204.8)	36,000 (160.1)	54,000 (240.2)
# 8 (25.4)	9 (228.6)	35,600 (158.4)	47,311 (210.5)	47,400 (210.9)	71,100 (316.3)
	12 (304.8)	41,010 (182.4)	66,140 (294.2)	47,400 (210.9)	71,100 (316.3)
# 9 (28.6)	10-1/8 (257.2)	-- --	57,221 (254.5)	60,000 (266.9)	90,000 (400.4)
	13-1/2 (342.9)	-- --	79,966 (355.7)	60,000 (266.9)	90,000 (400.4)
# 10 (31.8)	11-1/4 (285.8)	49,045 (218.2)	73,091 (325.1)	76,200 (339.0)	114,300 (508.5)
	15 (381.0)	69,079 (307.3)	83,295 (370.5)	76,200 (339.0)	114,300 (508.5)
# 11 (34.9)	12-3/8 (314.3)	63,397 (282.0)	75,047 (333.8)	93,600 (416.4)	140,400 (624.6)
	16-1/2 (419.1)	81,707 (363.5)	91,989 (409.2)	93,600 (416.4)	140,400 (624.6)

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of minimum Grade 60 reinforcing bar. The use of lower strength rods will result in lower ultimate tension loads.

3 SHEAR DATA: Provided the distance from the rebar to the edge of the concrete member exceeds 1.25 times the embedment depth of the rebar, calculate the ultimate shear load for the rebar anchorage as 60% of the ultimate tensile strength of the rebar.

A7
Acrylic Adhesive
**Recommended Edge Distance Requirements for
 Shear Loads Installed in Concrete**

ANCHOR DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	CRITICAL EDGE DISTANCE In. (mm) (100% LOAD CAPACITY)	INTERPOLATED EDGE DISTANCE In. (mm) (80% LOAD CAPACITY)	INTERPOLATED EDGE DISTANCE In. (mm) (50% LOAD CAPACITY)	MINIMUM EDGE DISTANCE In. (mm) (10% LOAD CAPACITY)
3/8 (9.5)	3-3/8 (85.7)	4-3/16 (106.4)	3-7/16 (87.3)	2-5/16 (58.7)	13/16 (20.6)
1/2 (12.7)	4-1/2 (114.3)	5-5/8 (142.9)	4-5/8 (117.5)	3-1/8 (79.4)	1-1/8 (28.6)
5/8 (15.9)	5-5/8 (142.9)	7 (177.8)	5-3/4 (146.1)	3-1/8 (79.4)	1-3/8 (34.9)
3/4 (19.1)	6-3/4 (171.5)	8-7/16 (214.2)	6-15/16 (176.2)	4-5/8 (117.5)	1-5/8 (41.3)
1 (25.4)	9 (228.6)	11-1/4 (285.8)	9-1/4 (235.0)	6-1/4 (158.8)	2-1/4 (57.2)
1-1/4 (31.8)	11-1/4 (285.8)	14-1/16 (357.2)	11-5/8 (295.3)	7-7/8 (200.0)	2-7/8 (73.0)

Combined Tension and Shear Loading—for A7 Adhesive Anchors

Allowable loads for anchors under tension and shear loading at the same time (combined loading) will be lower than the allowable loads for anchors subjected to 100% tension or 100% shear. Use the following equation to evaluate anchors in combined loading conditions:

$$\left(\frac{N_a}{N_s}\right)^{5/3} + \left(\frac{V_a}{V_s}\right)^{5/3} \leq 1$$

 N_a = Applied Service Tension Load

 N_s = Allowable Tension Load

 V_a = Applied Service Shear Load

 V_s = Allowable Shear Load

PERFORMANCE TABLE

A7 Acrylic Adhesive Recommended Edge Distance Requirements for Tension Loads Installed in Concrete

ANCHOR DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	CRITICAL EDGE DISTANCE In. (mm) (100% LOAD CAPACITY)	INTERPOLATED EDGE DISTANCE In. (mm) (90% LOAD CAPACITY)	INTERPOLATED EDGE DISTANCE In. (mm) (80% LOAD CAPACITY)	MINIMUM EDGE DISTANCE In. (mm) (70% LOAD CAPACITY)
3/8 (9.5)	3-3/8 (85.7)	2-1/2 (63.5)	1-15/16 (49.2)	1-3/8 (34.9)	13/16 (26.2)
	4-1/2 (114.3)	3-3/8 (85.7)	2-5/8 (66.7)	1-7/8 (47.6)	1-1/8 (28.6)
1/2 (12.7)	4-1/2 (114.3)	3-3/8 (85.7)	2-5/8 (66.7)	1-7/8 (47.6)	1-1/8 (28.6)
	6 (152.4)	4-1/2 (114.3)	3-1/2 (88.9)	2-1/2 (63.5)	1-1/2 (38.1)
5/8 (15.9)	5-5/8 (142.9)	4-3/16 (106.4)	3-1/4 (82.6)	2-5/16 (58.7)	1-3/8 (34.9)
	7-1/2 (190.5)	5-5/8 (142.9)	4-3/8 (111.1)	3-1/8 (79.4)	1-7/8 (47.6)
3/4 (19.1)	6-3/4 (171.5)	5-1/16 (128.6)	3-15/16 (100.0)	2-13/16 (71.4)	1-5/8 (15.9)
	9 (228.6)	6-3/4 (171.5)	5-1/4 (133.4)	3-3/4 (95.3)	2-1/4 (57.2)
1 (25.4)	9 (228.6)	6-3/4 (171.5)	5-1/4 (133.4)	3-3/4 (95.3)	2-1/4 (57.2)
	12 (304.8)	9 (228.6)	7 (177.8)	5 (127.0)	3 (76.2)
1-1/4 (31.8)	11-1/4 (285.8)	8-7/16 (214.3)	6-9/16 (166.7)	4-3/4 (120.7)	2-7/8 (73.0)
	15 (381.0)	11-1/4 (285.8)	8-3/4 (222.2)	6-1/4 (158.8)	3-3/4 (95.3)

A7 Acrylic Adhesive Recommended Spacing Requirements for Tension Loads Installed in Concrete, Lightweight Concrete and HollowBlock

ANCHOR DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	CRITICAL SPACING In. (mm) (100% LOAD CAPACITY)	INTERPOLATED SPACING In. (mm) (90% LOAD CAPACITY)	MINIMUM SPACING In. (mm) (80% LOAD CAPACITY)
3/8 (9.5)	3-3/8 (85.7)	4-3/16 (106.4)	2-1/2 (63.5)	13/16 (20.6)
	4-1/2 (114.3)	5-5/8 (142.9)	3-3/8 (85.7)	1-1/8 (28.6)
1/2 (12.7)	4-1/2 (114.3)	5-5/8 (142.9)	3-3/8 (85.7)	1-1/8 (28.6)
	6 (152.4)	7-1/2 (190.5)	4-1/2 (114.3)	1-1/2 (38.1)
5/8 (15.9)	5-5/8 (142.9)	7 (177.8)	4-3/16 (106.4)	1-3/8 (34.9)
	7-1/2 (190.5)	9-3/8 (238.1)	5-5/8 (142.9)	1-7/8 (47.6)
3/4 (19.1)	6-3/4 (171.5)	8-7/16 (214.3)	5 (127.0)	1-5/8 (41.3)
	9 (228.6)	11-1/4 (285.8)	6-3/4 (171.5)	2-1/4 (57.2)
1 (25.4)	9 (228.6)	11-1/4 (285.8)	6-3/4 (171.5)	2-1/4 (57.2)
	12 (304.8)	15 (381.0)	9 (228.6)	3 (76.2)
1-1/4 (31.8)	11-1/4 (285.8)	14-1/16 (357.2)	8-1/2 (215.9)	2-7/8 (73.0)
	15 (381.0)	18-3/4 (476.3)	11-1/4 (285.8)	3-3/4 (95.5)

A7 Adhesive Edge/Spacing Distance Load Factor Summary for Installation of Threaded Rod and Reinforcing Bar^{1,2}

LOAD FACTOR	DISTANCE FROM EDGE OF CONCRETE
Critical Edge Distance—Tension	
100% Tension Load	→ 0.75 x Anchor Embedment
Minimum Edge Distance—Tension	
70% Tension Load	→ 0.25 x Anchor Embedment
Critical Edge Distance—Shear	
100% Shear Load	→ 1.25 x Anchor Embedment
Minimum Edge Distance—Shear	
10% Shear Load	→ 0.25 x Anchor Embedment
LOAD FACTOR	DISTANCE FROM ANOTHER ANCHOR
Critical Spacing—Tension	
100% Tension Load	→ 1.25 x Anchor Embedment
Minimum Spacing—Tension	
80% Tension Load	→ 0.25 x Anchor Embedment
Critical Spacing—Shear	
100% Shear Load	→ 1.25 x Anchor Embedment
Minimum Spacing—Shear	
25% Shear Load	→ 0.25 x Anchor Embedment

1 Use linear interpolation for load factors at edge distances or spacing distances between critical and minimum.

2 Anchors are affected by multiple combination of spacing and/or edge distance loading and direction of the loading. Use the product of tension and shear loading factors in design.

A7 Chemical Resistance

A7 Chemical Resistance

	HIGH Anchors installed with A7 could be submerged in these materials.	MEDIUM Intermittent exposure or temporary submersion due to splash or spill.	LOW Exposure of A7 should be limited to splash and spill exposure followed by immediate cleanup.
Fresh Water	✓		
Salt Water	✓		
Brine	✓		
Urine	✓		
Humus	✓		
20% Caustic (NaOH)		✓	
Gasoline		✓	
10% Sulfuric Acid (H ₂ SO ₄)		✓	
3.5% Hydrochloric Acid (HCl)		✓	
9% Phosphoric Acid (H ₃ PO ₄)		✓	
10% Nitric Acid		✓	
8.5% Ammonium Hydroxide		✓	
Bleach		✓	
Ammonia		✓	
Xylene			✓
Toluene			✓
Acetone			✓
Glacial Acetic Acid			✓
Methanol			✓
Methylene Chloride			✓

Important Note: This chemical resistance table above applies only when A7 adhesive is used for installing anchors into concrete in a conventional manner with recommended hole sizes. Installation of the anchor must always be done in a drilled hole which is completely cleaned of all concrete dust. Exposure to solvents and chemicals, as listed above should occur only after the A7 adhesive has fully cured.

C6 Adhesive

**2006 IBC
Compliant**

Reliable Performance— Even Under the Most Severe Installation Conditions

The hardener and resin are completely mixed as they are dispensed from the dual cartridge through a static mixing nozzle. The pre-mixed adhesive is injected directly into the anchor hole. C6 can be used with threaded rod or rebar (for fastening to hollow base materials, see pages 30 and 33).



NEW!

Base Material Temperature 15°F
(cartridge temperature must be ≥ 70°F)



ADVANTAGES

- 1 hour cure time (see below)
- Works in damp holes and underwater applications
- Minimum shrinkage—can be used in oversized holes and diamond cored holes
- High heat deflection temperature: 139°F minimum
- One formula for both solid and hollow base materials
- NSF standard 61 certified for drinking water systems
- Extensively tested—earthquake, underwater, creep, freeze-thaw, radiation, fire, fatigue, electrical isolation, ozone and many more test programs have been conducted on C6
- Extensive use—C6 has been used on projects all over the world for almost 20 years

Curing Times


BASE MATERIAL ¹ (F°/C°)	WORKING TIME ²	FULL CURE TIME
120°/ 49°	4 minutes	1 hour
110°/ 43°	4 minutes	1 hour
90°/ 32°	5 minutes	1 hour
80°/ 26°	6 minutes	1 hour
70°/ 21°	7 minutes	1 hour
60°/ 16°	7 minutes	2 hours
50°/ 10°	7 minutes	2 hours
40°/ 4°	7 minutes	24 hours
15°/ -9°	6 minutes	24 hours

¹ Cartridge must be ≥ 70° F.

² Working time is max time from the end of mixing to when the insertion of the anchor into the adhesive shall be completed.

Gel Time per ASTM D2471 = 10 minutes at 72° F

INSTALLATION STEPS

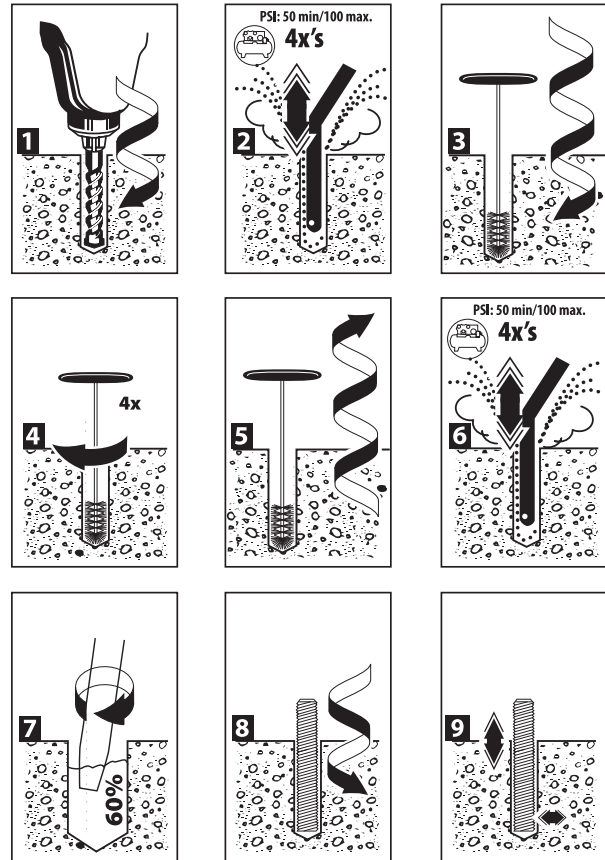

Certified to
ANSI/NSF 61

APPROVALS/LISTINGS

ICC Evaluation Service, Inc. – #ER4285

City of Los Angeles – RR#24975




City of Los Angeles – RR#24927



NSF Standard 61 Certified for Drinking Water Components

Conforms to ASTM C881-02; Type I & IV; Grade 3; Class A, B, and C; with exceptions

DOT Approvals

C6-18 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	CTN QTY
 C6-18	C6 Adhesive, 18 Fl. Oz. Cartridge	6
 E24XL	Mixing Nozzle for C6-18 Cartridge Nozzle diameter fits 9/16" holes (overall length of nozzle 10-3/8")	24
 E102	Hand Dispenser for C6-18 Cartridges Dispenses both 18 oz. and 22 oz. Cartridges	1

PART NUMBER	DESCRIPTION	CTN QTY
 RH7030	EPCON DRIVE Cordless, battery powered dispensing tool for the C6-18 Cartridge	1
 E200	Pneumatic Dispenser for C6-18 Cartridge	1

Plunger Repair Kit
 Available for E102 Dispenser
Part No. E102RKIT



ESTIMATING TABLE

C6 Number of Anchoring Installations Per Cartridge* 18 Fluid Ounce Cartridge Using Reinforcing Bar with C6 Adhesive in Solid Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
# 3	1/2	316.7	158.4	105.6	79.2	63.3	52.8	45.2	39.6	35.2	31.7	28.8	26.4	24.4	22.6	21.1
# 4	5/8	239.3	119.6	79.8	59.8	47.9	39.9	34.2	29.9	26.6	23.9	21.8	19.9	18.4	17.1	16.0
# 5	3/4	183.5	91.8	61.2	45.9	36.7	30.6	26.2	22.9	20.4	18.4	16.7	15.3	14.1	13.1	12.2
# 6	7/8	148.2	74.1	49.4	37.0	29.6	24.7	21.2	18.5	16.5	14.8	13.5	12.3	11.4	10.6	9.9
# 7	1-1/8	71.0	35.5	23.7	17.7	14.2	11.8	10.1	8.9	7.9	7.1	6.5	5.9	5.5	5.1	4.7
# 8	1-1/4	63.2	31.6	21.1	15.8	12.6	10.5	9.0	7.9	7.0	6.3	5.7	5.3	4.9	4.5	4.2
# 9	1-3/8	65.9	33.0	22.0	16.5	13.2	11.0	9.4	8.2	7.3	6.6	6.0	5.5	5.1	4.7	4.4
# 10	1-1/2	53.9	27.0	18.0	13.5	10.8	9.0	7.7	6.7	6.0	5.4	4.9	4.5	4.1	3.9	3.6
# 11	1-3/4	33.0	16.5	11.0	8.2	6.6	5.5	4.7	4.1	3.7	3.3	3.0	2.7	2.5	2.4	2.2

ESTIMATING TABLE

CLAMPING FORCE PROVIDED ON PAGE 20

C6 Number of Anchoring Installations Per Cartridge* 18 Fluid Ounce Cartridge Using Threaded Rod with C6 Adhesive in Solid Concrete

ROD In. (mm)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
1/4 (6.4)	5/16	587.3	293.7	195.8	146.8	117.5	97.9	83.9	73.4	65.3	58.7	53.4	48.9	45.2	42.0	39.2
3/8 (9.5)	7/16	340.0	170.0	113.3	85.0	68.0	56.7	48.6	42.5	37.8	34.0	30.9	28.3	26.2	24.3	22.7
1/2 (12.7)	9/16	244.7	122.4	81.6	61.2	48.9	40.8	35.0	30.6	27.2	24.5	22.2	20.4	18.8	17.5	16.3
5/8 (15.9)	3/4	125.2	62.6	41.7	31.3	25.0	20.9	17.9	15.7	13.9	12.5	11.4	10.4	9.6	8.9	8.3
3/4 (19.1)	7/8	99.1	49.5	33.0	24.8	19.8	16.5	14.2	12.4	11.0	9.9	9.0	8.3	7.6	7.1	6.6
7/8 (22.2)	1	82.0	41.0	27.4	20.5	16.4	13.7	11.7	10.3	9.1	8.2	7.5	6.8	6.3	5.9	5.5
1 (25.4)	1-1/8	67.6	33.8	22.5	16.9	13.5	11.3	9.7	8.4	7.5	6.8	6.1	5.6	5.2	4.8	4.5
1-1/4 (31.8)	1-3/8	51.2	25.6	17.0	12.8	10.2	8.5	7.3	6.4	5.7	5.1	4.6	4.3	3.9	3.7	3.4

* The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.
 * Oversized holes acceptable but volume of adhesive will increase.

PACKAGING

1. Disposable, self-contained cartridge system capable of dispensing both epoxy components in the proper mixing ratio
2. Epoxy components dispensed through a static mixing nozzle that thoroughly mixes the material, and places the epoxy at the base of the pre-drilled hole
3. Cartridge markings: Include manufacturer's name, batch number and best-used-by date, mix ratio by volume, ANSI hazard classification, and appropriate ANSI handling precautions

SUGGESTED SPECIFICATIONS

EPOXY ADHESIVE:

High Strength EPOXY ADHESIVE: USA Made, ARRA Certified

1. Two component resin and hardener, 100% solids (containing no solvents or VOC's), non-sag paste, insensitive to moisture, grey in color, early working time and gel time appropriate for sever installation conditions, suitable for extreme temperature ranges, for all conditions or substrate materials.
2. Meets NSF Standard 61, certified for use in conjunction with drinking water systems.
3. Works in wet, damp, and submerged hole.
4. Conforms to ASTM C881-02; Type I & IV; Grade 3; Class A, B, and C; with exceptions.
5. Compressive strength, ASTM D695-02: 12,090 psi minimum.
6. Heat deflection temperature: 139°F minimum.
7. Extended Shelf life: Best if used within 2 years.
8. Reliable performance in solid or hollow base materials.
9. Oversized and/or diamond cored holes permitted.
10. Suitable for Cold Base material installation using warmed cartridge.

PERFORMANCE TABLE

C6 Epoxy Adhesive

Average Ultimate Tension and Shear Loads^{1,2,3} for Threaded Rod Installed in Grout Filled Concrete Block

THREADED ROD DIA. In. (mm)	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR LOCATION	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
3/8 (9.5)	7/16 (11.1)	3 (76.2)	GROUTED CELL	4,862 (21.6)	-- --
1/2 (12.7)	5/8 (15.9)	3 (76.2)	GROUTED CELL	4,953 (22.0)	-- --
1/2 (12.7)	5/8 (15.9)	6 (152.4)	GROUTED CELL	8,214 (36.5)	-- --
5/8 (15.9)	3/4 (19.1)	5 (127.0)	GROUTED CELL	7,355 (32.7)	-- --
3/4 (19.1)	7/8 (22.2)	6 (152.4)	Note 1	17,404 (77.4)	19,588 (87.1)
3/4 (19.1)	7/8 (22.2)	6 (152.4)	Note 2	17,404 (77.4)	8,668 (38.6)

1 Anchor can be located in grouted cell, "T" joint, or bed joint.

2 Anchor can be located in first grouted cell from edge.

3 Allowable working loads for the single installations under static loading should not exceed 25% (an industry standard) capacity or the allowable load of the anchor rod. Loads based upon testing with ASTM A193, Grade B7 rods.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 18

C6
Epoxy Adhesive
Average Ultimate Tension and Shear Loads^{1,2,3}
for Threaded Rod Installed in Solid Concrete

THREADED ROD DIA. In. (mm)	MAX. CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	EMBEDMENT IN CONCRETE In. (mm)	2000 PSI (13.8 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE		6000 PSI (41.4 MPa) CONCRETE	
			ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
3/8 (9.5)	13 - 18 (17.6-24.4)	3-3/8 (85.7)	7,195 (32.0)	5,209 (23.2)	8,445 (37.6)	5,869 (26.1)	10,621 (47.2)	5,941 (26.4)
		4-1/2 (114.3)	8,317 (37.0)	5,209 (23.2)	10,021 (44.6)	5,869 (26.1)	10,603 (47.2)	5,941 (26.4)
1/2 (12.7)	22 - 25 (29.8-33.9)	4-1/2 (114.3)	13,271 (59.0)	11,427 (50.8)	17,684 (78.7)	12,585 (56.0)	17,684 (78.7)	12,585 (56.0)
		6 (152.4)	19,127 (85.1)	11,427 (50.8)	19,608 (87.2)	12,585 (56.0)	19,608 (87.2)	12,585 (56.0)
5/8 (15.9)	55 - 80 (74.6-108.5)	5-5/8 (142.9)	17,704 (78.8)	18,294 (81.4)	24,526 (109.1)	19,802 (88.1)	24,526 (109.1)	19,802 (88.1)
		7-1/2 (190.5)	22,642 (100.7)	18,294 (81.4)	28,766 (128.0)	19,802 (88.1)	29,456 (131.0)	19,802 (88.1)
3/4 (19.1)	106-160 (143.7-216.9)	6-3/4 (171.5)	28,779 (128.0)	25,723 (114.4)	31,521 (140.2)	25,723 (114.4)	33,759 (150.2)	25,723 (114.4)
		9 (228.6)	31,758 (141.3)	25,723 (114.4)	41,384 (184.0)	25,723 (114.4)	41,384 (184.0)	25,723 (114.4)
7/8 (22.2)	185-250 (250.8-338.9)	7-7/8 (200.0)	35,257 (156.8)	-- --	37,714 (167.8)	30,295 (134.8)	41,023 (182.5)	32,573 (144.9)
		10-1/2 (266.7)	-- --	-- --	51,211 (227.8)	30,295 (134.8)	51,211 (227.8)	32,573 (144.9)
1 (25.4)	276-330 (374.2-447.4)	9 (228.6)	40,334 (179.4)	38,519 (171.3)	47,886 (213.0)	40,341 (179.5)	47,886 (213.0)	46,416 (206.5)
		12 (304.8)	48,719 (216.7)	38,519 (171.3)	62,194 (276.7)	40,341 (179.5)	63,053 (280.5)	46,416 (206.5)
1-1/4 (31.8)	370-660 (501.6-894.8)	11-1/4 (285.8)	55,654 (247.6)	65,085 (289.5)	56,981 (253.5)	65,085 (289.5)	-- --	65,085 (289.5)
		15 (381.0)	65,728 (289.5)	65,085 (289.5)	79,726 (354.7)	65,085 (289.5)	-- --	65,085 (289.5)

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000, 4000, and 6000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances (see page 22).

C6 Adhesive Edge/Spacing Distance Load Factor Summary
for Installation of Threaded Rod and Reinforcing Bar^{1,2}
LOAD FACTOR
Critical Edge Distance—Tension

100% Tension Load

Minimum Edge Distance—Tension

70% Tension Load

Critical Edge Distance—Shear

100% Shear Load

Minimum Edge Distance—Shear

30% Shear Load

DISTANCE FROM EDGE OF CONCRETE

1.25 x Anchor Embedment (or greater)

0.50 x Anchor Embedment

1.25 x Anchor Embedment (or greater)

0.30 x Anchor Embedment

LOAD FACTOR
Critical Spacing—Tension

100% Tension Load

Minimum Spacing—Tension

75% Tension Load

Critical Spacing—Shear

100% Shear Load

Minimum Spacing—Shear

30% Shear Load

DISTANCE FROM ANOTHER ANCHOR

1.50 x Anchor Embedment (or greater)

0.75 x Anchor Embedment

1.50 x Anchor Embedment (or greater)

0.50 x Anchor Embedment

1 Use linear interpolation for load factors at edge distances or spacing distances between critical and minimum.

2 Anchors are affected by multiple combination of spacing and/or edge distance loading and direction of the loading. Use the product of tension and shear loading factors in design.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 18

C6
Epoxy Adhesive
Allowable Tension Loads^{1,2,3} for Threaded Rod Installed in Solid Concrete

THREADED ROD DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	ALLOWABLE TENSION LOAD BASED ON ADHESIVE BOND STRENGTH			ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH		
		2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE Lbs. (kN)	6000 PSI (41.4 MPa) IN CONCRETE Lbs. (kN)	ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
3/8 (9.5)	3-3/8 (85.7)	1,800 (8.0)	2,110 (9.4)	2,655 (11.8)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
	4-1/2 (114.3)	2,080 (9.2)	2,505 (11.1)	2,655 (11.8)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
1/2 (12.7)	4-1/2 (114.3)	3,315 (14.8)	4,420 (19.7)	4,420 (19.7)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
	6 (152.4)	4,780 (21.3)	4,900 (21.8)	4,900 (21.8)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
5/8 (15.9)	5-5/8 (142.9)	4,425 (19.7)	6,130 (27.3)	6,130 (27.3)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
	7-1/2 (190.5)	5,660 (25.2)	7,190 (32.0)	7,364 (32.8)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
3/4 (19.1)	6-3/4 (171.5)	7,195 (32.0)	7,885 (35.1)	8,440 (37.5)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
	9 (228.6)	7,940 (35.3)	10,345 (46.0)	10,345 (46.0)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
7/8 (22.2)	7-7/8 (200.0)	8,810 (39.2)	9,430 (41.9)	10,260 (45.6)	11,600 (51.6)	25,510 (113.5)	20,835 (92.7)
	10-1/2 (266.7)	-- --	12,080 (57.0)	12,805 (57.0)	11,600 (51.6)	25,510 (113.5)	20,835 (92.7)
1 (25.4)	9 (228.6)	10,085 (44.9)	11,970 (53.3)	11,970 (53.0)	15,180 (67.5)	31,620 (140.7)	26,560 (118.1)
	12 (304.8)	12,180 (54.2)	15,545 (69.2)	15,760 (70.1)	15,180 (67.5)	31,620 (140.7)	26,560 (118.1)
1-1/4 (31.8)	11-1/4 (285.8)	13,915 (61.9)	14,245 (63.4)	14,245 (63.4)	23,800 (105.9)	49,580 (220.6)	34,670 (154.2)
	15 (381.0)	16,340 (72.7)	19,930 (88.7)	19,930 (88.7)	23,800 (105.9)	49,580 (220.6)	34,670 (154.2)

1 Use lower value of either bond or steel strength for allowable tensile load.

2 Allowable loads taken from ICC Evaluation Report #4285 (formerly ICBO).

3 Linear interpolation may be used for intermediate spacing and edge distances (see page 22).

PERFORMANCE TABLE
C6
Epoxy Adhesive
Average Ultimate Tension Loads^{1,2,3} for Threaded Rod Installed in Solid Concrete, Shallow Embedment

ANCHOR DIAMETER In. (mm)	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT IN CONCRETE In. (mm)	3500 PSI (24.2 MPa) ULTIMATE TENSION Lbs. (kN)
1/4 (6.4)	5/16 (7.9)	1 (25.4)	1,653 (7.4)
		2-1/4 (57.2)	2,818 (12.5)
		3 (76.2)	3,599 (16.0)
3/8 (9.5)	7/16 (11.1)	1-1/2 (38.1)	3,426 (15.2)
1/2 (12.7)	9/16 (14.3)	2 (50.8)	6,100 (27.1)
5/8 (15.9)	3/4 (19.1)	2-1/2 (63.5)	8,775 (39.0)
3/4 (19.1)	7/8 (22.2)	3 (76.2)	12,625 (56.2)
7/8 (22.2)	1 (25.4)	3-1/2 (88.9)	18,650 (83.0)
1 (25.4)	1-1/8 (28.6)	4 (101.6)	25,034 (111.4)
1-1/4 (31.8)	1-3/8 (34.9)	5 (127.0)	37,100 (165.0)

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000, 4000, and 6000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances (see page 22).

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 18

C6
Epoxy Adhesive
Average Ultimate Tension Loads^{1,2,3} for Reinforcing Bar Installed in Solid Concrete

REINFORCING BAR In. (mm)	EMBEDMENT IN CONCRETE In. (mm)	2000 PSI (13.8 MPa) CONCRETE ULTIMATE TENSION Lbs. (kN)		4000 PSI (27.6 MPa) CONCRETE ULTIMATE TENSION Lbs. (kN)		ULTIMATE TENSILE AND YIELD STRENGTH GRADE 60 REBAR	
		MINIMUM YIELD STRENGTH Lbs. (kN)	MINIMUM ULTIMATE TENSILE STRENGTH Lbs. (kN)				
# 3 (9.5)	3-3/8 (85.7)	7,020 (31.2)	9,200 (40.9)	6,600 (29.4)	9,900 (44.0)		
	4-1/2 (114.3)	9,000 (40.1)	11,540 (51.3)	6,600 (29.4)	9,900 (44.0)		
# 4 (12.7)	4-1/2 (114.3)	11,940 (53.1)	15,140 (67.3)	12,000 (53.4)	18,000 (80.1)		
	6 (152.4)	16,703 (74.3)	18,880 (84.0)	12,000 (53.4)	18,000 (80.1)		
# 5 (15.9)	5-5/8 (142.9)	14,120 (62.8)	27,740 (123.4)	18,600 (82.7)	27,900 (124.1)		
	7-1/2 (190.5)	20,040 (89.1)	30,727 (136.7)	18,600 (82.7)	27,900 (124.1)		
# 6 (19.1)	6-3/4 (171.5)	17,940 (79.8)	29,200 (129.9)	26,400 (117.4)	39,600 (176.2)		
	9 (228.6)	25,520 (113.5)	41,640 (185.2)	26,400 (117.4)	39,600 (176.2)		
	10 (254.0)	--	45,000 (200.2)	26,400 (117.4)	39,600 (176.2)		
# 7 (22.2)	7-7/8 (200.0)	--	45,850 (204.0)	36,000 (160.1)	54,000 (240.2)		
	10-1/2 (266.7)	--	60,375 (268.6)	36,000 (160.1)	54,000 (240.2)		
	13 (330.2)	--	65,300 (290.5)	36,000 (160.1)	54,000 (240.2)		
# 8 (25.4)	9 (228.6)	30,960 (137.7)	54,180 (241.1)	47,400 (210.9)	71,100 (316.3)		
	12 (304.8)	30,960 (137.7)	65,420 (291.0)	47,400 (210.9)	71,100 (316.3)		
	16 (406.4)	--	86,700 (385.7)	47,400 (210.9)	71,100 (316.3)		
# 9 (28.6)	10-1/8 (257.2)	--	61,530 (273.7)	60,000 (266.9)	90,000 (400.4)		
	13-1/2 (342.9)	--	81,240 (361.4)	60,000 (266.9)	90,000 (400.4)		
	19 (482.6)	--	108,000 (480.4)	60,000 (266.9)	90,000 (400.4)		
# 10 (31.8)	11-1/4 (285.8)	44,600 (198.4)	76,500 (340.3)	76,200 (339.0)	114,300 (508.5)		
	15 (381.0)	49,220 (218.9)	82,320 (366.2)	76,200 (339.0)	114,300 (508.5)		
	19 (482.6)	--	120,000 (533.8)	76,200 (339.0)	114,300 (508.5)		

1 Allowable working loads for the single installations under static loading should not exceed 25% ultimate capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on minimum Grade 60 reinforcing bar. The use of lower strength rods will result in lower ultimate tension and shear loads.

3 SHEAR DATA: Provided the distance from the rebar to the edge of the concrete member exceeds 1.25 times the embedment depth of the rebar, calculate the ultimate shear load for the rebar anchorage as 60% of the ultimate tensile strength of the rebar.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 18

C6
Epoxy Adhesive
Allowable Shear Loads^{1,2,3} for Threaded Rod Installed in Solid Concrete

THREADED ROD DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ALLOWABLE SHEAR LOAD BASED ON CONCRETE STRENGTH			ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH		
		2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE Lbs. (kN)	6000 PSI (41.4 MPa) CONCRETE Lbs. (kN)	ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
3/8 (9.5)	3-3/8 (85.7)	1,300 (5.8)	1,465 (6.5)	1,500 (6.7)	1,040 (4.6)	2,170 (9.7)	1,995 (8.9)
1/2 (12.7)	4-1/2 (114.3)	2,855 (12.7)	3,145 (14.0)	3,145 (14.0)	1,870 (8.3)	3,895 (17.3)	3,585 (15.9)
5/8 (15.9)	5-5/8 (142.9)	4,575 (20.3)	4,950 (22.0)	4,950 (22.0)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
3/4 (19.1)	6-3/4 (171.5)	6,430 (28.6)	6,430 (28.6)	6,430 (28.6)	4,250 (18.9)	8,855 (39.4)	7,440 (33.1)
7/8 (22.2)	7-7/8 (200.0)	--	7,575 (33.7)	8,140 (36.2)	5,800 (25.8)	12,760 (56.8)	10,730 (47.7)
1 (25.4)	9 (228.6)	9,630 (42.8)	10,085 (44.9)	11,600 (51.6)	7,590 (33.8)	15,810 (70.3)	13,285 (59.1)
1-1/4 (31.8)	11-1/4 (285.8)	16,270 (72.4)	16,270 (72.4)	16,270 (72.4)	11,900 (52.9)	24,790 (110.3)	18,840 (83.8)

1 Use lower value of either concrete or steel strength for allowable shear load.

2 Allowable loads taken from ICC Evaluation Report #4285 (formerly ICBO).

3 Linear interpolation may be used for intermediate spacing and edge distances (see page 22).

Combined Tension and Shear Loading—for Adhesive Anchors

Allowable loads for anchors under tension and shear loading at the same time (combined loading) will be lower than the allowable loads for anchors subjected to 100% tension or 100% shear. Use the following equation to evaluate anchors in combined loading conditions:

$$\left(\frac{N_a}{N_s}\right)^{5/3} + \left(\frac{V_a}{V_s}\right)^{5/3} \leq 1$$

 N_a = Applied Service Tension Load

 N_s = Allowable Tension Load

 V_a = Applied Service Shear Load

 V_s = Allowable Shear Load


C6 Chemical Resistance

C6 Chemical Resistance		HIGH Anchors installed with C6 epoxy could be submerged in these materials.	MEDIUM Intermittent exposure or temporary submersion due to splash or spill.	LOW Exposure of C6 should be limited to splash and spill exposure followed by immediate cleanup.
Xylene		✓		
Gasoline		✓		
20% Caustic (NaOH)		✓		
Fresh Water		✓		
Salt Water		✓		
10% Sulfuric Acid (H ₂ SO ₄)			✓	
3.5% Hydrochloric Acid (HCl)			✓	
9% Phosphoric Acid (H ₃ PO ₄)			✓	
Toluene			✓	
10% Nitric Acid			✓	
8.5% Ammonium Hydroxide			✓	
5% Bleach				✓
Acetone				✓
Glacial Acetic Acid				✓
Methanol				✓
Methylene Chloride				✓

Important Note: This chemical resistance table above applies only when C6 epoxy is used for installing anchors into concrete in a conventional manner with recommended hole sizes. Installation of the anchor must always be done in a drilled hole which is completely cleaned of all concrete dust and is dry. Exposure to solvents, chemicals and water, as listed above, should occur only after the C6 epoxy has fully cured.

G5 Adhesive

2006 IBC
Compliant
ICC-ES Report
No. 1137

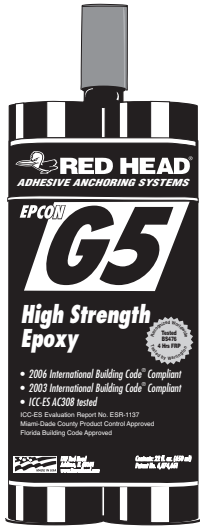

High Strength Epoxy tested in accordance to ICC-ES AC308

The epoxy resin and hardener are completely mixed as they are dispensed from the dual cartridge through a static mixing nozzle, directly into the anchor hole. G5 can be used with threaded rod or rebar.

Compliant with 2003 IBC & 2006 IBC. Category 1 performance rating. One bond strength — no load reduction factors (ϕ) required for installation conditions such as dry, water-saturated, water-filled, underwater, and submerged applications.



ADVANTAGES

FORMULATED FOR HOT OR WARM WEATHER

- Fire rated: tested up to 4hrs FRP
- High strength Epoxy
- 15 minute nozzle life at 70° degrees F.



**International
Standard
Fire Resistance
Performance**


NON-OFFENSIVE ODOR

- Virtually odorless, can be used indoors

Curing Times

BASE MATERIAL (F°/C°)	WORKING TIME	FULL CURE TIME
110°/ 43°	9 minutes	24 hours
90°/ 32°	9 minutes	24 hours
70°/ 20°	15 minutes	24 hours
50°/ 10°	15 minutes	24 hours

INSTALLATION STEPS

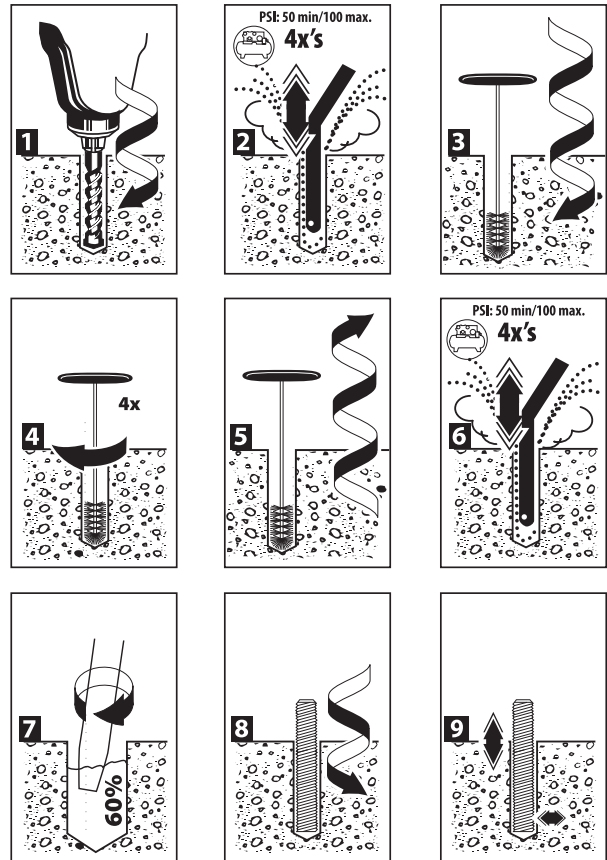

*For ICC-ES cleaning method, please go online to www.icc-es.org or www.itwredhead.com.

APPROVALS/LISTINGS

Conforms to ASTM C881-02; Type I & IV; Grade 3; Class A, B, and C; with exceptions

ICC Evaluation Service, Inc.— No. ESR 1137






DOT Approvals

Miami-Dade County # 04-0405.01

Florida Building Code Approved

Patent No. 6,874,661

G5-22 FL. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX/BAG QTY	CARTON QTY
 G5-22	G5 Adhesive, 22 Fluid Oz. Cartridge	N/A	6
 E55	Mixing Nozzle for G5-22 and A7-28 Cartridge Nozzle diameter fits 3/8" to 5/8" holes (overall length of nozzle 14")	24	N/A
 E25-6	6-Foot Straight Plastic Extension Tubing (can be cut to proper size) (.39 in I.D. x .43 in. O.D.)	6	N/A
 E102	Hand Dispenser for G5-22 Cartridges — Dispenses both 18 oz. and 22 oz. Cartridges	1	1
 E202	Pneumatic Tool for G5-22 Cartridges	1	1

Plunger Repair Kit
 Available for E102 Dispenser
Part No. E102RKIT



ESTIMATING TABLE

G5 Number of Anchoring Installations Per Cartridge* 22 Fluid Ounce Cartridge Using Reinforcing Bar with G5 Adhesive in Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
# 3	1/2	388.9	194.5	129.6	97.2	77.8	64.8	55.6	48.6	43.2	38.9	35.4	32.4	29.9	27.8	25.9
# 4	5/8	293.8	146.9	97.9	73.5	58.5	49.0	42.0	36.7	32.6	29.4	26.7	24.5	22.6	21.0	19.6
# 5	3/4	225.4	112.7	75.1	56.3	45.1	37.6	32.2	28.2	25.0	22.5	20.5	18.8	17.3	16.1	15.0
# 6	7/8	182.0	91.0	60.7	45.5	36.4	30.3	26.0	22.7	20.2	18.2	16.5	15.2	14.0	13.0	12.1
# 7	1-1/8	87.2	43.6	29.1	21.8	17.4	14.5	12.5	10.9	9.7	8.7	7.9	7.3	6.7	6.2	5.8
# 8	1-1/4	77.6	38.8	25.9	19.4	15.5	12.9	11.1	9.7	8.6	7.8	7.1	6.5	6.0	5.5	5.2
# 9	1-3/8	81.0	40.5	27.0	20.2	16.2	13.5	11.6	10.1	9.0	8.1	7.4	6.7	6.2	5.8	5.4
# 10	1-1/2	66.2	33.1	22.1	16.6	13.2	11.0	9.5	8.3	7.4	6.6	6.0	5.5	5.1	4.7	4.4
# 11	1-3/4	40.5	20.2	13.5	10.1	8.1	6.7	5.8	5.1	4.5	4.0	3.7	3.4	3.1	2.9	2.7

ESTIMATING TABLE

CLAMPING FORCE PROVIDED ON PAGE 26

G5 Number of Anchoring Installations Per Cartridge* 22 Fluid Ounce Cartridge Using Threaded Rod with G5 Adhesive in Concrete

ROD In. (mm)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES (mm)														
		1 (25.4)	2 (50.8)	3 (76.2)	4 (101.6)	5 (127.0)	6 (152.4)	7 (177.8)	8 (203.2)	9 (228.6)	10 (254.0)	11 (279.4)	12 (304.8)	13 (330.2)	14 (355.6)	15 (381.0)
1/4 (6.4)	5/16	721.2	360.6	240.4	180.3	144.2	120.2	103.0	90.2	80.1	72.1	65.6	60.1	55.5	51.5	48.1
3/8 (9.5)	7/16	417.6	208.8	139.2	104.4	83.5	69.6	59.7	52.2	46.4	41.8	38.0	34.8	32.1	29.8	27.8
1/2 (12.7)	9/16	300.5	150.3	100.2	75.1	60.1	50.1	42.9	37.6	33.4	30.1	27.3	25.0	23.1	21.5	20.0
5/8 (15.9)	3/4	153.8	76.9	51.3	38.4	30.8	25.6	22.0	19.2	17.1	15.4	14.0	12.8	11.8	11.0	10.3
3/4 (19.1)	7/8	121.7	60.8	40.6	30.4	24.3	20.3	17.4	15.2	13.5	12.2	11.1	10.1	9.4	8.7	8.1
7/8 (22.2)	1	100.9	50.5	33.6	25.2	20.2	16.8	14.4	12.6	11.2	10.1	9.2	8.4	7.8	7.2	6.7
1 (25.4)	1-1/8	83.0	41.5	27.7	20.7	16.6	13.8	11.9	10.4	9.2	8.3	7.5	6.9	6.4	5.9	5.5
1-1/4 (31.8)	1-3/8	62.8	31.4	20.9	15.7	12.6	10.5	9.0	7.8	7.0	6.3	5.7	5.2	4.8	4.5	4.2

* The number of anchoring installations is based upon calculations of hole volumes using ANSI tolerance carbide tipped drill bits, the nominal areas of the reinforcing bars and the stress areas of the threaded rods. These estimates do not account for waste.
 * Oversized holes acceptable but volume of adhesive will increase.

PACKAGING

1. Disposable, self-contained 22 ounce cartridge system capable of dispensing both epoxy components in the proper mixing ratio
2. Epoxy components dispensed through a static mixing nozzle that thoroughly mixes the material and places the epoxy at the base of the pre-drilled hole
3. Cartridge markings: Include manufacturer's name, batch number and best-used-by date, mix ratio by volume, ANSI hazard classification, and appropriate ANSI handling precautions

SUGGESTED SPECIFICATIONS

EPOXY ADHESIVE:

High Strength EPOXY ADHESIVE: USA Made, ARRA Certified

1. Odorless, two component resin and hardener, 100% solids (containing no solvents or VOC's), non-sag paste, insensitive to moisture, grey in color, extended working time, medium gel time for warm concrete.
2. Works in wet, damp, or submerged holes.
3. Conforms to ASTM C881-02; Type I & IV; Grade 3; Class A, B, and C; with exceptions.
4. Compressive Strength, ASTM D695-02: 10,344 psi minimum.
5. Heat Deflection Temperature; 144°F minimum.
6. Shelf life: Best if used within 18 months.
7. Formulated for use in warmer concrete, solid grout-filled masonry, and solid brick.
8. Oversized and/or Core drilled holes permitted.
9. Fire-Resistance Performance of 4 Hours

PERFORMANCE TABLE

DRILL HOLE DIAMETERS
PROVIDED ON PAGE 25

G5 Epoxy Adhesive

Average Ultimate Tension and Shear Loads^{1,2,3} for Threaded Rod Installed in Solid Concrete

THREADED ROD DIA. In. (mm)	MAX. CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	EMBEDMENT CONCRETE In. (mm)	2000 PSI (13.8 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE	
			ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
3/8 (9.5)	9 (12.2)	1-1/2 (38.1)	--	--	--	--
		3-3/8 (85.7)	5,060 (22.5)	6,227 (27.7)	8,396 (37.3)	6,227 (27.7)
		4-1/2 (114.3)	6,465 (28.8)	6,227 (27.7)	10,490 (46.7)	6,227 (27.7)
1/2 (12.7)	16 (21.6)	2 (50.8)	--	--	--	--
		4-1/2 (114.3)	10,484 (46.6)	12,016 (53.5)	13,476 (59.9)	12,016 (53.5)
		6 (152.4)	12,392 (55.1)	12,016 (53.5)	19,166 (85.3)	12,016 (53.5)
		7-1/2 (190.5)	--	12,016 (53.5)	20,572 (91.5)	12,016 (53.5)
5/8 (15.9)	47 (63.5)	2-1/2 (63.5)	--	--	--	--
		5-5/8 (142.9)	14,634 (65.1)	17,547 (78.1)	20,880 (92.9)	17,547 (78.1)
		7-1/2 (190.5)	20,182 (89.8)	17,547 (78.1)	27,939 (124.3)	17,547 (78.1)
		9-3/8 (238.1)	--	17,547 (78.1)	32,249 (143.5)	17,547 (78.1)
3/4 (19.1)	90 (121.5)	3 (76.2)	--	--	--	--
		6-3/4 (171.5)	18,966 (84.4)	24,918 (110.8)	29,019 (129.1)	24,918 (110.8)
		9 (228.6)	25,988 (115.6)	24,918 (110.8)	43,812 (194.9)	24,918 (110.8)
		11-1/4 (285.8)	--	24,918 (110.8)	47,927 (213.2)	24,918 (110.8)
1 (25.4)	276 (372.6)	4 (101.6)	--	--	--	--
		9 (228.6)	43,804 (194.9)	43,648 (194.2)	53,531 (238.1)	43,648 (194.2)
		12 (304.8)	45,351 (201.6)	43,648 (194.2)	64,022 (284.8)	43,648 (194.2)
		15 (381.0)	--	43,648 (194.2)	82,547 (367.2)	43,648 (194.2)

1 Allowable working loads for the single installations under static loading should not exceed 25% (an industry standard) capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 25

G5
Epoxy Adhesive
**Allowable Tension Loads^{1,2} for Threaded Rod
 Installed in Solid Concrete**

THREADED ROD DIA. In. (mm)	MIN. EMBEDMENT DEPTH In. (mm)	ALLOWABLE TENSION LOAD BASED ON EPOXY BOND STRENGTH		ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH		
		2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE Lbs. (kN)	ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
3/8 (9.5)	3-3/8 (85.7)	1,265 (5.6)	2,092 (9.3)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
	4-1/2 (114.3)	1,616 (7.2)	2,622 (11.7)	2,080 (9.3)	4,340 (19.3)	3,995 (17.8)
1/2 (12.7)	4-1/2 (114.3)	3,004 (13.4)	3,369 (15.0)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
	6 (152.4)	3,098 (13.8)	4,791 (21.3)	3,730 (16.6)	7,780 (34.6)	7,155 (31.8)
5/8 (15.9)	5-5/8 (142.9)	3,659 (16.3)	5,220 (23.2)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
	7-1/2 (190.5)	5,046 (22.4)	6,985 (31.1)	5,870 (26.1)	12,230 (54.4)	11,250 (50.0)
3/4 (19.1)	6-3/4 (171.5)	4,742 (21.1)	7,255 (32.3)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
	9 (228.6)	6,497 (28.9)	10,057 (44.7)	8,490 (37.8)	17,690 (78.7)	14,860 (66.1)
1 (25.4)	9 (228.6)	10,951 (48.7)	11,209 (49.9)	15,180 (67.5)	31,620 (140.6)	26,560 (118.1)
	12 (304.8)	11,338 (50.4)	15,923 (70.8)	15,180 (67.5)	31,620 (140.6)	26,560 (118.1)

1 Use lower value of either bond or steel strength for allowable tensile load.

2 Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 25

G5
Epoxy Adhesive
**Allowable Shear Loads^{1,2} for Threaded Rod Installed
 in Solid Concrete**

THREADED ROD DIA. In. (mm)	MIN. EMBEDMENT DEPTH In. (mm)	ALLOWABLE SHEAR LOAD BASED ON CONCRETE STRENGTH		ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH		
		2000 PSI (13.8 MPa) CONCRETE Lbs. (kN)	4000 PSI (27.6 MPa) CONCRETE Lbs. (kN)	ASTM A307 (SAE 1018) Lbs. (kN)	ASTM A193 GR. B7 (SAE 4140) Lbs. (kN)	ASTM F593 AISI 304 SS Lbs. (kN)
3/8 (9.5)	3-3/8 (85.7)	1,557 (6.9)	1,557 (6.9)	1,040 (4.6)	2,170 (9.7)	1,995 (8.9)
1/2 (12.7)	4-1/2 (114.3)	3,004 (13.4)	3,004 (13.4)	1,870 (8.3)	3,895 (17.3)	3,585 (15.9)
5/8 (15.9)	5-5/8 (142.9)	4,387 (19.5)	4,387 (19.5)	2,940 (13.1)	6,125 (27.2)	5,635 (25.1)
3/4 (19.1)	6-3/4 (171.5)	6,230 (27.7)	6,230 (27.7)	4,250 (18.9)	8,855 (39.4)	7,440 (33.1)
1 (25.4)	9 (228.6)	10,912 (48.5)	10,912 (48.5)	7,590 (33.8)	15,810 (70.3)	13,285 (59.1)

1 Use lower value of either concrete or steel strength for allowable shear load.

2 Linear interpolation may be used for intermediate spacing and edge distances.

Combined Tension and Shear Loading— for G5 Adhesive Anchors

Allowable loads for anchors under tension and shear loading at the same time (combined loading) will be lower than the allowable loads for anchors subjected to 100% tension or 100% shear. Use the following equation to evaluate anchors in combined loading conditions:

$$\left(\frac{N_a}{N_s}\right) + \left(\frac{V_a}{V_s}\right) \leq 1$$

 N_a = Applied Service Tension Load

 V_a = Applied Service Shear Load

 N_s = Allowable Tension Load

 V_s = Allowable Shear Load

PERFORMANCE TABLE

 DRILL HOLE DIAMETERS
 PROVIDED ON PAGE 25

**G5
 Epoxy Adhesive**
Average Ultimate Tension Loads^{1,2,3} for Reinforcing Bar Installed in Solid Concrete

REINFORCING BAR In. (mm)	EMBEDMENT IN CONCRETE In. (mm)	2000 PSI (13.8 MPa) IN CONCRETE ULTIMATE TENSION Lbs. (kN)	4000 PSI (27.6 MPa) IN CONCRETE ULTIMATE TENSION Lbs. (kN)	ULTIMATE TENSILE AND YIELD STRENGTH GRADE 60 REBAR	
				MINIMUM YIELD STRENGTH Lbs. (kN)	MINIMUM ULTIMATE TENSILE STRENGTH Lbs. (kN)
# 3 (9.5)	3-3/8 (85.7)	7,480 (33.3)	8,090 (35.9)	6,600 (29.4)	9,900 (44.0)
	4-1/2 (114.3)	-- --	10,488 (46.6)	6,600 (29.4)	9,900 (44.0)
# 4 (12.7)	4-1/2 (114.3)	-- --	14,471 (64.4)	12,000 (53.4)	18,000 (80.1)
	6 (152.4)	11,235 (50.0)	20,396 (90.7)	12,000 (53.4)	18,000 (80.1)
# 5 (15.9)	5-5/8 (142.9)	-- --	21,273 (94.6)	18,600 (82.7)	27,900 (124.1)
	7-1/2 (190.5)	18,108 (80.6)	31,863 (141.7)	18,600 (82.7)	27,900 (124.1)
# 6 (19.1)	6-3/4 (171.5)	-- --	27,677 (123.1)	26,400 (117.4)	39,600 (176.2)
	9 (228.6)	29,338 (130.5)	47,879 (212.9)	26,400 (117.4)	39,600 (176.2)
# 7 (22.2)	7-7/8 (200.0)	-- --	43,905 (195.3)	36,000 (160.1)	54,000 (240.2)
	10-1/2 (266.7)	-- --	52,046 (231.5)	36,000 (160.1)	54,000 (240.2)
# 8 (25.4)	9 (228.6)	-- --	55,676 (247.7)	47,400 (210.9)	71,100 (316.3)
	12 (304.8)	48,000 (213.5)	77,358 (344.1)	47,400 (210.9)	71,100 (316.3)
# 9 (28.6)	10-1/8 (257.2)	-- --	62,443 (277.8)	60,000 (266.9)	90,000 (400.4)
	13-1/2 (342.9)	-- --	71,959 (320.1)	60,000 (266.9)	90,000 (400.4)
# 10 (31.8)	11-1/4 (285.8)	-- --	70,165 (312.1)	76,200 (339.0)	114,300 (508.5)
	15 (381.0)	-- --	78,545 (349.4)	76,200 (339.0)	114,300 (508.5)

- 1 Allowable working loads for the single installations under static loading should not exceed 25% ultimate capacity or the allowable load of the anchor rod.
- 2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of minimum Grade 60 reinforcing bar. The use of lower strength rods will result in lower ultimate tension and shear loads.
- 3 SHEAR DATA: Provided the distance from the rebar to the edge of the concrete member exceeds 1.25 times the embedment depth of the rebar, calculate the ultimate shear load for the rebar anchorage as 60% of the ultimate tensile strength of the rebar.

**G5 Adhesive Edge/Spacing Distance Load Factor Summary
 for Installation of Threaded Rod and Reinforcing Bar^{1,2}**

LOAD FACTOR	DISTANCE FROM EDGE OF CONCRETE
Critical Edge Distance—Tension	
100% Tension Load	→ 1.25 x Anchor Embedment
Minimum Edge Distance—Tension	
70% Tension Load	→ 0.50 x Anchor Embedment
Critical Edge Distance—Shear	
100% Shear Load	→ 1.25 x Anchor Embedment
Minimum Edge Distance—Shear	
30% Shear Load	→ 0.30 x Anchor Embedment
LOAD FACTOR	DISTANCE FROM ANOTHER ANCHOR
Critical Spacing—Tension	
100% Tension Load	→ 1.50 x Anchor Embedment
Minimum Spacing—Tension	
75% Tension Load	→ 0.75 x Anchor Embedment
Critical Spacing—Shear	
100% Shear Load	→ 1.50 x Anchor Embedment
Minimum Spacing—Shear	
30% Shear Load	→ 0.50 x Anchor Embedment

- 1 Use linear interpolation for load factors at edge distances or spacing distances between critical and minimum.
- 2 Anchors are affected by multiple combination of spacing and/or edge distance loading and direction of the loading. Use the product of tension and shear loading factors in design.

G5 Chemical Resistance

G5 Chemical Resistance

	HIGH Anchors installed with G5 could be submerged in these materials.	MEDIUM Intermittent exposure or temporary submersion due to splash or spill.	LOW Exposure of G5 should be limited to splash and spill exposure followed by immediate cleanup.
Xylene	✓		
Gasoline	✓		
20% Caustic (NaOH)	✓		
Fresh Water	✓		
Salt Water	✓		
10% Sulfuric Acid (H ₂ SO ₄)		✓	
3.5% Hydrochloric Acid (HCL)		✓	
9% Phosphoric Acid		✓	
Toluene		✓	
10% Nitric Acid		✓	
8.5% Ammonium Hydroxide		✓	
5% Bleach			✓
Acetone			✓
Glacial Acetic Acid			✓
Methanol			✓
Methylene Chloride			✓

Important Note: This chemical resistance table above only applies when G5 epoxy is used for installing anchors into concrete in a conventional manner with recommended hole sizes. Installation of the anchor must always be done in a drilled hole which is completely cleaned of all concrete dust and is dry. Exposure to solvents, chemical and water, as listed above, should occur only after the G5 epoxy has full cured.


Umbrella Inserts and Stubby Screens

High Performance Adhesive Systems for Fastening to Hollow Base Materials




A7-28

C6-18



HB 14-2



HBU-38




HBU-FS Insert

Hollow Block Fastening with A7 and C6 Adhesive


HBU-38

Umbrella Inserts—specially designed for fastening to the face of hollow concrete block, brick, clay tile or terra cotta. Accepts rods between 1/4", 3/8" and 1/2"

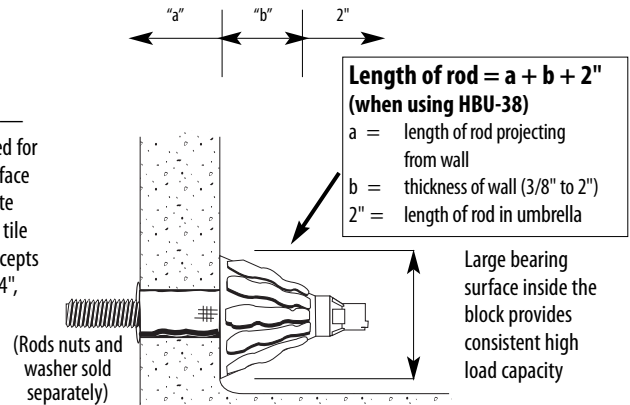


HBU-FS

Umbrella Inserts with 3/8" internally threaded sleeve. Removable fastening to concrete block

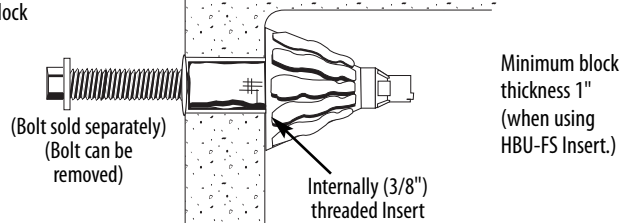


STUBBY SCREENS

Specially designed stainless steel screens provide maximum performance for a screen in the front face of hollow concrete block. Screens available for rods 1/4" to 5/8"

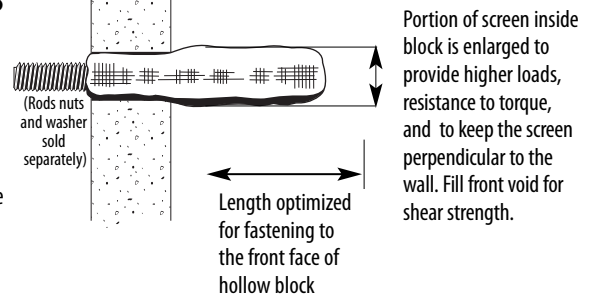

Section View—Face Concrete Block

INSTALLATION STEPS

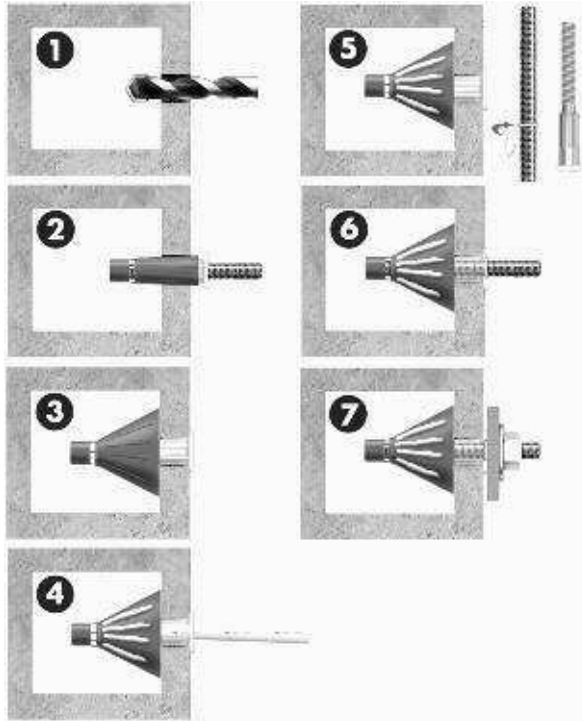




1. Drill 3/4" diameter hole, 3-3/4" deep using rotation only drilling mode and carbide tipped drill bit. Clean out hole with forced air. Complete hole preparation with use of a brush and repeat cleaning with compressed air (leave no dust or slurry).
2. Place umbrella on piece of threaded rod, stretch umbrella over the rod by pulling the white collar back approximately 1". Squeeze orange portion of umbrella and push umbrella into hole.
3. Push umbrella body through the hole and completely into void. Remove threaded rod. (Do not use in solid base materials. For anchoring into block web, ends and mortar joints, use screens.)
4. Dispense and discard a sufficient amount of adhesive from new cartridge until a uniform adhesive mix is achieved. Inject approximately 1-1/2 fl. oz. of adhesive into umbrella (7 to 8 pumps using manual dispenser) to completely fill umbrella.
5. 3/8" rod uses a centering ring (supplied with inserts) to keep rod perpendicular to the wall.
6. Insert rod into the filled umbrella using a slow, soft twisting motion until it contacts the back of umbrella.
7. Wait for appropriate temperature/cure time before tightening fixture to the recommended torque of 10 ft./lbs.

Installation instructions for stubby screens provided on page 33.

SELECTION CHART

Umbrella Inserts



DESCRIPTION	PART NO.	BOX CONTENTS
 Umbrella Anchor	HBU-38	20 Umbrella 20 Centering Rings
 3/8" Internally Threaded Insert with Umbrella	HBU-F5	10 Umbrella 10 Flush Sleeve Inserts

SELECTION CHART

Stubby Screens



PART NO.	DESCRIPTION	QTY/BOX
HB 14-2	1/4" x 2" Stainless Screen	100
HB 38-312	3/8" x 3-1/2" Stainless Screen	100
HB 12-312	1/2" x 3-1/2" Stainless Screen	50
HB 58-412	5/8" x 4-1/2" Stainless Screen	50

ESTIMATING TABLE

Umbrella Inserts

Number of Anchoring Installations Per Cartridge* Using Threaded Rod and Umbrella Inserts with A7 and C6 Adhesives in Hollow Base Material

ROD In (mm)	DRILL HOLE DIA. INCHES	VOLUME OF CARTRIDGE	UMBRELLA INSERT WITH EMBEDMENT OF 3-3/4"
3/8 (9.5)	3/4	A7 5 fluid oz.	3
		A7 8 fluid oz.	5
		A7 10 fluid oz.	6
		A7 28 fluid oz.	17
		C6 18 fluid oz.	11

*These estimates do not account for waste.

ESTIMATING TABLE

Stubby Screens

Number of Anchoring Installations Per Cartridge* Using Threaded Rod and Stubby Screens with A7 and C6 Adhesives in Hollow Base Material

ROD In (mm)	DRILL HOLE DIA. INCHES	VOLUME OF CARTRIDGE	SCREEN LENGTH (INCHES)		
			2	3-1/2	4-1/2
1/4 (6.4)	3/8	A7 8 fluid oz.	39		
		A7 10 fluid oz.	48		
		A7 28 fluid oz.	135		
		C6 18 fluid oz.	87		
3/8 (9.5)	1/2	A7 8 fluid oz.		17	
		A7 10 fluid oz.		21	
		A7 28 fluid oz.		62	
		C6 18 fluid oz.		40	
1/2 (12.7)	5/8	A7 8 fluid oz.		12	
		A7 10 fluid oz.		15	
		A7 28 fluid oz.		43	
		C6 18 fluid oz.		28	
5/8 (15.9)	3/4	A7 8 fluid oz.			7
		A7 10 fluid oz.			11
		A7 28 fluid oz.			24
		C6 18 fluid oz.			16

* These estimates do not account for waste.

Load Values^{1,2} Using A7 in Hollow Concrete Block

	ROD DIA. In. (mm)	MAX CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	DRILL HOLE DIA. In. (mm)	EMBEDMENT (SCREEN LENGTH) In. (mm)	ULTIMATE TENSION Lbs. (Kn)	ULTIMATE SHEAR Lbs. (Kn)
Umbrella	3/8 (9.5)	10 (13)	3/4 (19.1)	3-3/4 (95.3)	3,558 (15.8)	3,109 (13.8)
Stubby Screens	1/4 (6.4)	4 (5)	3/8 (9.5)	2 (50.8)	1,550 (6.9)	1,900 (8.5)
	3/8 (9.5)	7 (9)	1/2 (12.7)	3-1/2 (88.9)	1,661 (7.4)	2,071 (9.2)
	1/2 (12.7)	10 (13)	5/8 (15.9)	3-1/2 (88.9)	2,458 (10.9)	4,467 (19.9)
	5/8 (15.9)	13 (17)	3/4 (19.1)	4-1/2 (114.3)	2,543 (10.9)	5,047 (22.4)

1 Allowable working loads should not exceed 25% ultimate capacity. Based upon testing using ASTM A193, Grade B7 rod.

2 The tabulated values are for anchors installed at a minimum 12 inch edge distance and minimum 8 inch spacing.


Load Values^{1,2} Using C6 in Hollow Concrete Block

	ROD DIA. In. (mm)	MAX CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	DRILL HOLE DIA. In. (mm)	EMBEDMENT (SCREEN LENGTH) In. (mm)	ULTIMATE TENSION Lbs. (Kn)	ULTIMATE SHEAR Lbs. (Kn)
Umbrella	3/8 (9.5)	10 (13)	3/4 (19.1)	3-3/4 (95.3)	1,875 (8.3)	2,200 (9.8)
Stubby Screens	1/4 (6.4)	4 (5)	3/8 (9.5)	2 (50.8)	1,550 (6.9)	1,900 (8.5)
	3/8 (9.5)	7 (9)	1/2 (12.7)	3-1/2 (88.9)	1,661 (7.4)	2,071 (9.2)
	1/2 (12.7)	10 (13)	5/8 (15.9)	3-1/2 (88.9)	1,873 (8.3)	2,242 (10.0)
	5/8 (15.9)	13 (17)	3/4 (19.1)	4-1/2 (114.3)	1,970 (8.8)	3,554 (15.8)

1 Allowable working loads should not exceed 25% ultimate capacity. Based upon testing using ASTM A193, Grade B7 rod.

2 The tabulated values are for anchors installed at a minimum 12 inch edge distance and minimum 8 inch spacing.

Screen Tubes

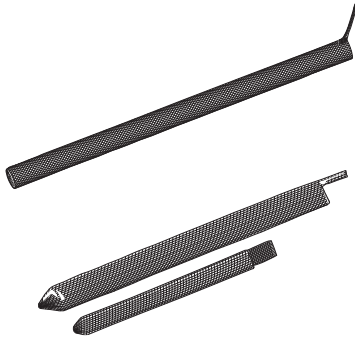

Quality Adhesive Anchoring Systems for Fastening Through Block and for Brick Pinning Applications

ADVANTAGES

HBP SERIES—NYLON SCREENS

- 30%-50% savings from stainless steel screens
- Comparable performance values
- Easier to insert and span across voids
- Flexible material is less susceptible to damage from crushing


HB SERIES—STAINLESS SCREENS

- Corrosion resistant
- Available in 1/4" to 3/4" diameters
- Special version, "dosage control" available for overhead and underwater installations

Screens Used with A7 and C6

HOLLOW CONCRETE BLOCK

Maximum holding strength in concrete block can be obtained by fastening to both the front and back of the block using an adhesive screen tube and threaded rod.




Top View


For attachments to single face of block, see page 30 for information on "umbrella anchors" and "stubby screens"

The no-drip feature of A7 adhesive makes it particularly well suited for brick pinning applications.


INSTALLATION STEPS




1. Drill proper sized hole, using rotation-only drilling mode. Clean out hole with forced air. Complete hole preparation with use of a brush and repeat cleaning with forced air (leave no dust or slurry).



2. When starting new cartridge or new nozzle, dispense and discard enough adhesive until uniform adhesive mix is achieved. Insert the nozzle into the bottom of the screen and **fill screen completely full** (use extension tube if needed to reach bottom of screen).




3. Insert the filled screen completely into the hole (subflush).



4. While holding the tab of the screen against the wall, hand insert the selected rod slowly into the screen tube with a slow twisting motion. Pull screen flush to face and coat with adhesive. Wait for appropriate cure time before torquing fixture in place.

BRICK WALL

Systems designed for Seismic Retrofit Brick Pinning or fastening to brick—various lengths and diameters available to accommodate site conditions.



Section

ESTIMATING TABLE

Screen Tubes

Number of Anchoring Installations Per Cartridge* Using Threaded Rod and Screen Tubes with A7 and C6 Adhesives in Hollow Base Material

ROD In (mm)	DRILL HOLE DIA. INCHES	VOLUME OF CARTRIDGE	SCREEN LENGTH (INCHES)			
			6	8	10	13
1/4 (6.4)	3/8	A7 8 fluid oz.	13	10	8	
		A7 10 fluid oz.	16	12	8	
		A7 28 fluid oz.	45	35	28	
		C6 18 fluid oz.	29	22	18	
3/8 (9.5)	1/2	A7 8 fluid oz.	10	8	6	
		A7 10 fluid oz.	12	10	7.5	
		A7 28 fluid oz.	37	29	23	
		C6 18 fluid oz.	24	19	15	
1/2 (12.7)	5/8	A7 8 fluid oz.	7	5	4	
		A7 10 fluid oz.	9	6	5	
		A7 28 fluid oz.	26	18	14	
		C6 18 fluid oz.	17	12	9	
5/8 (15.9)	3/4	A7 8 fluid oz.	5	4	3	
		A7 10 fluid oz.	6	5	4	
		A7 28 fluid oz.	18	14	10	
		C6 18 fluid oz.	12	9	7	
3/4 (19.1)	7/8	A7 8 fluid oz.			2	1
		A7 10 fluid oz.			2.5	1.75
		A7 28 fluid oz.			6	5
		C6 18 fluid oz.			4	3


* These estimates do not account for waste.

SELECTION CHART

Screen Tubes

HB Stainless Screen

HBP Nylon Screen

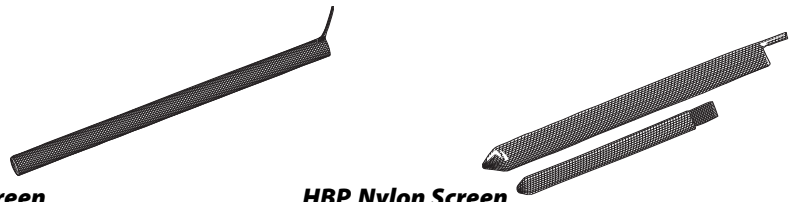

ROD DIA. In. (mm)	SCREEN LENGTH In. (mm)	STAINLESS STEEL SCREENS		NYLON SCREENS	
		PART NO.	QTY/BOX	PART NO.	QTY/BOX
1/4 (6.4)	6 (152.4)	HB 14-6	100	*	*
1/4 (6.4)	8 (203.2)	HB 14-8	100	*	*
1/4 (6.4)	10 (254.0)	HB 14-10	100	*	*
3/8 (9.5)	6 (152.4)	HB 38-6	50	HBP 38-6	50
3/8 (9.5)	8 (203.2)	HB 38-8	25	HBP 38-8	25
3/8 (9.5)	10 (254.0)	HB 38-10	25	HBP 38-10	25
1/2 (12.7)	6 (152.4)	HB 12-6	50	HBP 12-6	50
1/2 (12.7)	8 (203.2)	HB 12-8	25	HBP 12-8	25
1/2 (12.7)	10 (254.0)	HB 12-10	25	HBP 12-10	25
5/8 (15.9)	6 (152.4)	HB 58-6	25	HBP 58-6	40
5/8 (15.9)	8 (203.2)	HB 58-8	20	HBP 58-8	40
5/8 (15.9)	10 (254.0)	HB 58-10	20	HBP 58-10	40
3/4 (19.1)	8 (203.2)	HB 34-8	20	*	*
3/4 (19.1)	10 (254.0)	HB 34-10	10	HBP 34-10	20
3/4 (19.1)	13 (330.2)	HB 34-13	10	HBP 34-13	20

* Not available in standard strength nylon screens. Longer screens available through specials.

PERFORMANCE TABLE

Load Values
Average Ultimate Loads for HBP (nylon) or HB (stainless) Screens Used with A7 in Hollow Concrete Block¹

ROD DIA. In. (mm)	DRILL HOLE DIA. In. (mm)	MAX CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	EMBEDMENT (SCREEN LENGTH) In. (mm)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
1/4 (6.4)	3/8 (9.5)	5 (6)	8 (203.2)	2,072 (9.2)	2,264 (10.1)
3/8 (9.5)	1/2 (12.7)	12 (16)	8 (203.2)	2,360 (10.5)	2,668 (11.9)
1/2 (12.7)	5/8 (15.9)	19 (25)	8 (203.2)	2,647 (11.8)	2,668 (11.9)
5/8 (15.9)	3/4 (19.1)	26 (35)	8 (203.2)	2,647 (11.8)	3,578 (15.9)
3/4 (19.1)	7/8 (22.2)	28 (37)	8 (203.2)	2,647 (11.8)	4,573 (20.3)

¹ Allowable working loads should not exceed 25% of ultimate capacity. Loads based upon testing with ASTM A193, Grade B7 rods.

PERFORMANCE TABLE

Load Values
Average Ultimate Loads for HBP (nylon) or HB (stainless) Screens Used with C6 in Hollow Concrete Block¹

ROD DIA. In. (mm)	DRILL HOLE DIA. In. (mm)	MAX CLAMPING FORCE AFTER PROPER CURE Ft.-Lbs. (Nm)	EMBEDMENT In. (mm)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)
1/4 (6.4)	3/8 (9.5)	5 (6)	8 (203.2)	2,072 (9.2)	2,264 (10.1)
3/8 (9.5)	1/2 (12.7)	12 (16)	8 (203.2)	2,800 (12.5)	2,466 (10.9)
1/2 (12.7)	5/8 (15.9)	19 (25)	8 (203.2)	3,487 (15.5)	2,668 (11.9)
5/8 (15.9)	3/4 (19.1)	26 (35)	8 (203.2)	3,487 (15.5)	3,578 (15.9)
3/4 (19.1)	7/8 (22.2)	28 (37)	8 (203.2)	3,487 (15.5)	4,573 (20.3)

¹ Allowable working loads should not exceed 25% of ultimate capacity. Loads based upon testing with ASTM A193, Grade B7 rods.


PERFORMANCE TABLE

Load Values
Average Ultimate Loads for HBP (nylon) Screens Used with C6 in Brick and Concrete Block¹


NYLON SCREEN PART NO.	DRILL HOLE DIA. In. (mm)	SINGLE BRICK		DOUBLE BRICK		BRICK AND HOLLOW BLOCK ULTIMATE TENSION Lbs. (kN)
		ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)	ULTIMATE TENSION Lbs. (kN)	ULTIMATE SHEAR Lbs. (kN)	
HBP 38-6	1/2 (12.7)	2,150 (9.6)	-- --	4,675 (20.8)	1,917 (8.5)	3,659 (16.3)
HBP 38-8	1/2 (12.7)	2,200 (9.8)	1,143 (5.1)	6,175 (27.5)	1,743 (7.8)	3,659 (16.3)
HBP 38-10	1/2 (12.7)	2,000 (8.9)	950 (4.2)	3,272 (14.6)	2,498 (11.1)	2,498 (11.1)
HBP 12-6	5/8 (15.9)	3,800 (16.9)	-- --	6,369 (28.3)	2,498 (11.1)	5,595 (24.9)
HBP 12-8	5/8 (15.9)	1,750 (7.8)	-- --	7,530 (33.5)	2,305 (10.3)	3,500 (15.6)
HBP 12-10	5/8 (15.9)	2,618 (11.6)	-- --	2,885 (12.8)	2,305 (10.3)	2,498 (11.1)

¹ Allowable working loads should not exceed 25% of ultimate capacity. Loads based upon testing with ASTM A193, Grade B7 rods.

RED HEAD **Anchoring Systems**

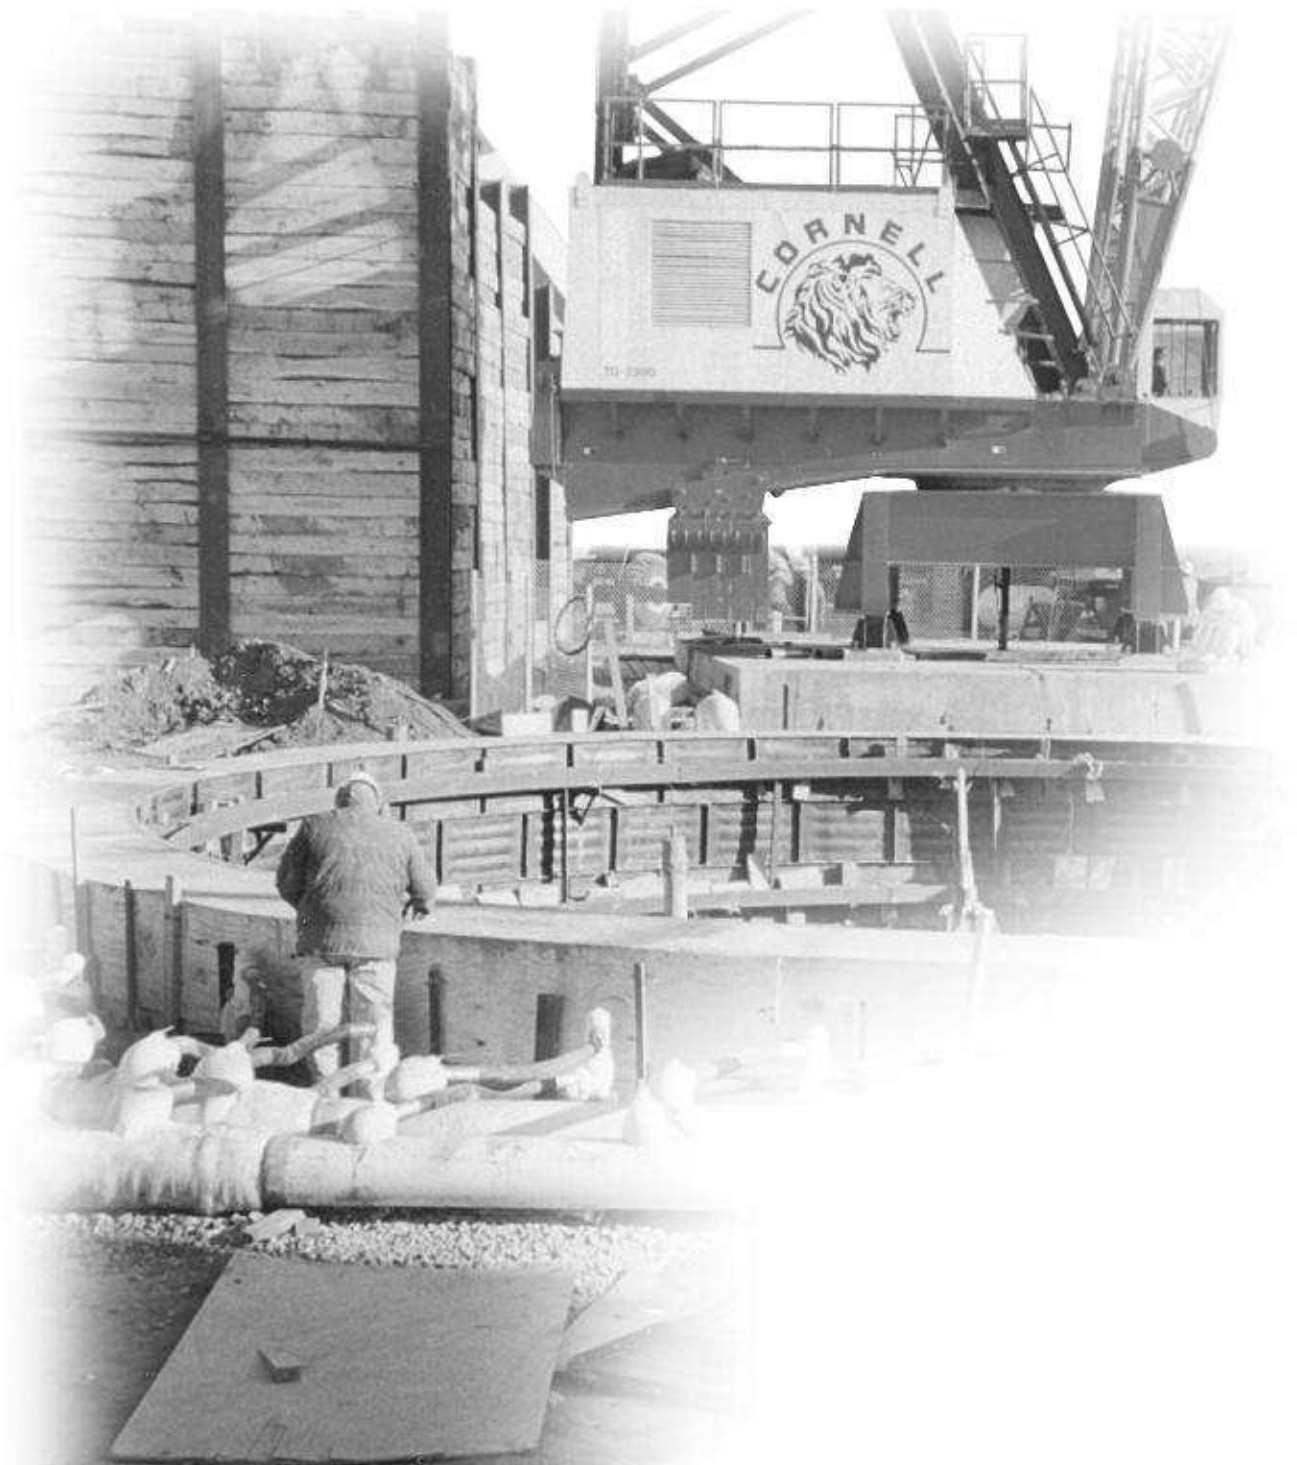

Trubolt Wedge



SPECIFIED FOR ANCHORAGE INTO CONCRETE

Trubolt Wedge anchors feature a stainless steel expansion clip, threaded stud body, nut and washer. Anchor bodies are made of plated carbon steel, hot-dipped galvanized carbon steel, type 304 stainless steel or type 316 stainless steel as identified in the drawings or other notations.

Trubolt+ Wedge anchors consist of a high-strength threaded stud body, expansion clip, nut and washer. Anchor bodies are made of plated carbon steel. The expansion clip consists of a split cylindrical ring with undercutting grooves.

The exposed end of the anchor is stamped to identify anchor length. Stampings should be preserved during installation for any subsequent embedment verification.

Use carbide tipped hammer drill bits made in accordance with ANSI B212.15-1994 to install anchors.

Anchors are tested to ACI 355.2 and ICC-ES AC193. Anchors are listed by the following agencies as required by the local building code: ICC-ES, UL, FM, City of Los Angeles, California State Fire Marshal and Caltrans.

APPROVALS/LISTINGS

Trubolt® Wedge Anchors

ICC Evaluation Service, Inc. # ESR-2251

- Category 1 performance rating
- 2006 IBC compliant
- Meets ACI 318 ductility requirements
- Tested in accordance with ACI 355.2 and ICC-ES AC193
- For use in seismic zones A & B
- 1/4", 3/8" & 1/2" diameter anchors listed in ESR-2251

Underwriters Laboratories

Factory Mutual

City of Los Angeles - #RR2748

California State Fire Marshall

Caltrans

Meets or exceeds U.S. Government G.S.A. Specification A-A-1923A Type 4 (formerly GSA: FF-S-325 Group II, Type 4, Class 1)


Trubolt+® Seismic Wedge Anchors

ICC Evaluation Service, Inc. # ESR-2427


- Category 1 performance rating
- 2006 IBC and 2009 IBC compliant
- Meets ACI 318 ductility requirements
- Tested in accordance with ACI 355.2 and ICC-ES AC193
- Listed for use in seismic zones A, B, C, D, E, & F
- 3/8", 1/2", 5/8" & 3/4" diameter anchors listed in ESR-2427

City of Los Angeles - #RR25867

INSTALLATION STEPS




1. Select a carbide drill bit with a diameter equal to the anchor diameter. Drill hole to any depth exceeding the desired embedment. See chart for minimum recommended embedment.



2. Clean hole or continue drilling additional depth to accommodate drill fines.



3. Assemble washer and nut, leaving nut flush with end of anchor to protect threads. Drive anchor through material to be fastened until washer is flush to surface of material.




4. Expand anchor by tightening nut 3-5 turns past the hand tight position, or to the specified torque requirement.

LENGTH INDICATION CODE *

CODE	LENGTH OF ANCHOR	CODE	LENGTH OF ANCHOR
A	1-1/2 < 2 (38.1 < 50.8)	K	6-1/2 < 7 (165.1 < 177.8)
B	2 < 2-1/2 (50.8 < 63.5)	L	7 < 7-1/2 (177.8 < 190.5)
C	2-1/2 < 3 (63.5 < 76.2)	M	7-1/2 < 8 (190.5 < 203.2)
D	3 < 3-1/2 (76.2 < 88.9)	N	8 < 8-1/2 (203.2 < 215.9)
E	3-1/2 < 4 (88.9 < 101.6)	O	8-1/2 < 9 (215.9 < 228.6)
F	4 < 4-1/2 (101.6 < 114.3)	P	9 < 9-1/2 (228.6 < 241.3)
G	4-1/2 < 5 (114.3 < 127.0)	Q	9-1/2 < 10 (241.3 < 254.0)
H	5 < 5-1/2 (127.0 < 139.7)	R	10 < 11 (254.0 < 279.4)
I	5-1/2 < 6 (139.7 < 152.4)	S	11 < 12 (279.4 < 304.8)
J	6 < 6-1/2 (152.4 < 165.1)	T	12 < 13 (304.8 < 330.2)

*Located on top of anchor for easy inspection.

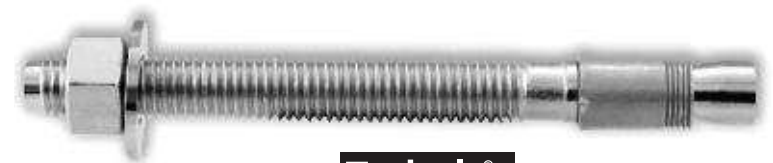

Trubolt+®
Seismic Wedge Anchors

PERFORMANCE TABLE

Trubolt Wedge Anchors Ultimate Tension and Shear Values (Lbs/kN) in Concrete*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	f'c = 2000 PSI (13.8 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 6000 PSI (41.4 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	4 (5.4)	1-1/8 (28.6)		1,180 (5.2)	1,400 (6.2)	1,780 (7.9)	1,400 (6.2)	1,900 (8.5)	1,400 (6.2)
		1-15/16 (49.2)		2,100 (9.3)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)
		2-1/8 (54.0)		2,260 (10.1)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)	3,300 (14.7)	1,680 (7.5)
3/8 (9.5)	25 (33.9)	1-1/2 (38.1)		1,680 (7.5)	2,320 (10.3)	2,240 (10.0)	2,620 (11.7)	2,840 (12.6)	3,160 (14.1)
		3 (76.2)		3,480 (15.5)	4,000 (17.8)	5,940 (26.4)	4,140 (18.4)	6,120 (27.2)	4,500 (20.0)
		4 (101.6)		4,800 (21.4)	4,000 (17.8)	5,940 (26.4)	4,140 (18.4)	6,120 (27.2)	4,500 (20.0)
1/2 (12.7)	55 (74.6)	2-1/4 (57.2)	WS-Carbon or WS-G	4,660 (20.7)	4,760 (21.2)	5,100 (22.7)	4,760 (21.2)	7,040 (31.3)	7,040 (31.3)
		4-1/8 (104.8)		4,660 (20.7)	7,240 (32.2)	9,640 (42.9)	7,240 (32.2)	10,820 (48.1)	8,160 (36.3)
		6 (152.4)		5,340 (23.8)	7,240 (32.2)	9,640 (42.9)	7,240 (32.2)	10,820 (48.1)	8,160 (36.3)
5/8 (15.9)	90 (122.0)	2-3/4 (69.9)	Hot-Dipped Galvanized or WW-304 S.S.	6,580 (29.3)	7,120 (31.7)	7,180 (31.9)	7,120 (31.7)	9,720 (43.2)	9,616 (42.8)
		5-1/8 (130.2)		6,580 (29.3)	9,600 (42.7)	14,920 (66.4)	11,900 (52.9)	16,380 (72.9)	12,520 (55.7)
		7-1/2 (190.5)		7,060 (31.4)	9,600 (42.7)	15,020 (66.8)	11,900 (52.9)	16,380 (72.9)	12,520 (55.7)
3/4 (19.1)	110 (149.2)	3-1/4 (82.6)	or SFW-316 S.S.	7,120 (31.7)	10,120 (45.0)	10,840 (48.2)	13,720 (61.0)	13,300 (59.2)	15,980 (71.1)
		6-5/8 (168.3)		10,980 (48.8)	20,320 (90.4)	17,700 (78.7)	23,740 (105.6)	20,260 (90.1)	23,740 (105.6)
		10 (254.0)		10,980 (48.8)	20,320 (90.4)	17,880 (79.5)	23,740 (105.6)	23,580 (104.9)	23,740 (105.6)
7/8 (22.2)	250 (339.0)	3-3/4 (95.3)		9,520 (42.3)	13,160 (58.5)	14,740 (65.6)	16,580 (73.8)	17,420 (77.5)	19,160 (85.2)
		6-1/4 (158.8)		14,660 (65.2)	20,880 (92.9)	20,940 (93.1)	28,800 (128.1)	24,360 (108.4)	28,800 (128.1)
		8 (203.2)		14,660 (65.2)	20,880 (92.9)	20,940 (93.1)	28,800 (128.1)	24,360 (108.4)	28,800 (128.1)
1 (25.4)	300 (406.7)	4-1/2 (114.3)		13,940 (62.0)	16,080 (71.5)	20,180 (89.8)	22,820 (101.5)	21,180 (94.2)	24,480 (108.9)
		7-3/8 (187.3)		14,600 (64.9)	28,680 (127.6)	23,980 (106.7)	37,940 (168.8)	33,260 (148.0)	38,080 (169.4)
		9-1/2 (241.3)		18,700 (83.2)	28,680 (127.6)	26,540 (118.1)	37,940 (168.8)	33,260 (148.0)	38,080 (169.4)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

* For Tie-Wire Wedge Anchor, TW-1400, use tension data from 1/4" diameter with 1-1/8" embedment.

* For continuous extreme low temperature applications, use stainless steel.

Trubolt Wedge Anchors Ultimate Tension and Shear Values (Lbs/kN) in Lightweight Concrete*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	LIGHTWEIGHT CONCRETE f'c = 3000 PSI (20.7 MPa)		LOWER FLUTE OF STEEL DECK WITH LIGHTWEIGHT CONCRETE FILL f'c = 3000 PSI (20.7 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	25 (33.9)	1-1/2 (38.1)	WS-Carbon or WS-G	1,175 (5.2)	1,480 (6.6)	1,900 (8.5)	3,160 (14.1)
		3 (76.2)		2,825 (12.6)	2,440 (10.9)	2,840 (12.6)	4,000 (17.8)
1/2 (12.7)	55 (74.6)	2-1/4 (57.2)	Hot-Dipped Galvanized or WW-304 S.S.	2,925 (13.0)	2,855 (12.7)	3,400 (15.1)	5,380 (23.9)
		3 (76.2)		3,470 (15.4)	3,450 (15.3)	4,480 (19.9)	6,620 (29.4)
		4 (101.6)		4,290 (19.1)	3,450 (15.3)	4,800 (21.4)	6,440 (28.6)
5/8 (15.9)	90 (122.0)	3 (76.2)	or SFW-316 S.S.	4,375 (19.5)	4,360 (19.4)	4,720 (21.0)	5,500 (24.5)
		5 (127.0)		6,350 (28.2)	6,335 (28.2)	6,580 (29.3)	9,140 (40.7)
3/4 (19.1)	110 (149.2)	3-1/4 (82.6)		5,390 (24.0)	7,150 (31.8)	5,840 (26.0)	8,880 (39.5)
		5-1/4 (133.4)		7,295 (32.5)	10,750 (47.8)	7,040 (31.3)	---

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

PERFORMANCE TABLE

Trubolt Wedge Anchors Recommended Edge and Spacing Distance Requirements for Shear Loads*

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .60 In. (mm)	MIN. EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .20 In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING BETWEEN ANCHORS In. (mm) LOAD FACTOR APPLIED = .40
1/4 (6.4)	1-1/8 (28.6)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	2 (50.8)	1-5/16 (33.3)	---	3-15/16 (100.0)	2 (50.8)
	1-15/16 (49.2)		1-15/16 (49.2)	1 (25.4)	---	3-7/8 (98.4)	1-15/16 (49.2)
3/8 (9.5)	1-1/2 (38.1)		2-5/8 (66.7)	1-3/4 (44.5)	---	5-1/4 (133.4)	2-5/8 (66.7)
	3 (76.2)		3-3/4 (95.3)	3 (76.2)	1-1/2 (38.1)	6 (152.4)	3 (76.2)
1/2 (12.7)	2-1/4 (57.2)		3-15/16 (100.0)	2-9/16 (65.1)	---	7-7/8 (200.0)	3-15/16 (100.0)
	4-1/8 (104.8)		5-3/16 (131.8)	3-1/8 (79.4)	1-9/16 (39.7)	6-3/16 (152.2)	3-1/8 (79.4)
5/8 (15.9)	2-3/4 (69.9)		4-13/16 (122.2)	3-1/8 (79.4)	---	9-5/8 (244.5)	4-13/16 (122.2)
	5-1/8 (130.2)		6-7/16 (163.5)	3-7/8 (98.4)	1-15/16 (49.2)	7-11/16 (195.3)	3-7/8 (98.4)
3/4 (19.1)	3-1/4 (82.6)		5-11/16 (144.5)	3-3/4 (95.3)	---	11-3/8 (288.9)	5-11/16 (144.5)
	6-5/8 (168.3)		6-5/16 (160.3)	5 (127.0)	2-1/2 (63.5)	9-15/16 (252.4)	5 (127.0)
7/8 (22.2)	3-3/4 (95.3)		6-9/16 (166.7)	4-5/16 (109.5)	---	13-1/8 (333.4)	6-9/16 (166.7)
	6-1/4 (158.8)		8-1/2 (215.9)	6-1/4 (158.8)	3-1/8 (79.4)	12-1/2 (317.5)	6-1/4 (158.8)
1 (25.4)	4-1/4 (108.0)	7-7/8 (200.0)	5-1/8 (130.2)	---	15-3/4 (400.1)	7-7/8 (200.0)	
	7-3/8 (187.3)	10-1/16 (255.6)	7-3/8 (187.3)	3-11/16 (93.7)	14-3/4 (374.7)	7-3/8 (187.3)	

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

Trubolt Wedge Anchors Recommended Edge and Spacing Distance Requirements for Tension Loads*

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .65 In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING AT WHICH THE LOAD FACTOR APPLIED = .70 In. (mm)
1/4 (6.4)	1-1/8 (28.6)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	2 (50.8)	1 (25.4)	3-15/16 (100.0)	2 (50.8)
	1-15/16 (49.2)		1-15/16 (49.2)	1 (25.4)	3-7/8 (98.4)	1-15/16 (49.2)
	2-1/8 (54.0)		1-5/8 (41.3)	13/16 (20.6)	3-3/16 (81.0)	1-5/8 (41.3)
3/8 (9.5)	1-1/2 (38.1)		2-5/8 (66.7)	1-5/16 (33.3)	5-1/4 (133.4)	2-5/8 (66.7)
	3 (76.2)		3 (76.2)	1-1/2 (38.1)	6 (152.4)	3 (76.2)
	4 (101.6)		3 (76.2)	1-1/2 (38.1)	6 (152.4)	3 (76.2)
1/2 (12.7)	2-1/4 (57.2)		3-15/16 (100.0)	2 (50.8)	7-7/8 (200.0)	3-15/16 (100.0)
	4-1/8 (104.8)		3-1/8 (79.4)	1-9/16 (39.7)	6-3/16 (152.2)	3-1/8 (79.4)
	6 (152.4)		4-1/2 (114.3)	2-1/4 (57.2)	9 (228.6)	4-1/2 (114.3)
5/8 (15.9)	2-3/4 (69.9)		4-13/16 (122.2)	2-7/16 (61.9)	9-5/8 (244.5)	4-13/16 (122.2)
	5-1/8 (130.2)		5-1/8 (98.4)	1-15/16 (49.2)	7-1/16 (195.3)	3-7/8 (98.4)
	7-1/2 (190.5)		5-5/8 (142.9)	2-13/16 (71.4)	11-1/4 (285.8)	5-5/8 (142.9)
3/4 (19.1)	3-1/4 (82.6)	5-11/16 (144.5)	2-7/8 (73.0)	11-3/8 (288.9)	5-11/16 (144.5)	
	6-5/8 (168.3)	5 (127.0)	2-1/2 (63.5)	9-15/16 (252.4)	5 (127.0)	
	10 (254.0)	7-1/2 (190.5)	3-3/4 (95.3)	15 (381.0)	7-1/2 (190.5)	
7/8 (22.2)	3-3/4 (95.3)	6-9/16 (166.7)	3-5/16 (84.1)	13-1/8 (333.4)	6-9/16 (166.7)	
	6-1/4 (158.8)	6-1/4 (158.8)	3-1/8 (79.4)	12-1/2 (317.5)	6-1/4 (158.8)	
	8 (203.2)	6 (152.4)	3 (76.2)	12 (304.8)	6 (152.4)	
1 (25.4)	4-1/2 (114.3)	7-7/8 (200.0)	3-15/16 (100.0)	15-3/4 (400.1)	7-7/8 (200.0)	
	7-3/8 (187.3)	7-3/8 (187.3)	3-11/16 (93.7)	14-3/4 (374.7)	7-3/8 (187.3)	
	9-1/2 (241.3)	7-1/8 (181.0)	3-9/16 (90.5)	14-1/4 (362.0)	7-1/8 (181.0)	

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.


Combined Tension and Shear Loading—for Trubolt Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t)^{5/3} + (V_s/V_t)^{5/3} \leq 1$$

P_s = Applied tension load V_s = Applied shear load P_t = Allowable tension load V_t = Allowable shear load

Large Diameter Tapcon (LDT) Self-threading



SPECIFIED FOR ANCHORAGE INTO CONCRETE

The LDT anchor is a high performance anchor that cuts its own threads into concrete.

Anchor bodies are made of hardened carbon steel and zinc plated. Grade 5

The anchors shall have a finished hex washer head with anti-rotation serrations to prevent anchor back-out. The head of the anchor is stamped with a length identification code for easy inspection.

The anchor shall be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.

APPROVALS/LISTINGS

Miami-Dade County – #04-1025.08

Florida Building Code

LDT 3/8" and 1/2" are available with EnvireX coating

1,000 hours salt spray ASTM B117. Approved for use in ACQ and MCQ lumber*

*Excessive content of copper in the ACQ and MCQ lumber may affect the anchor finish.


LENGTH INDICATION CODE*

CODE	LENGTH OF ANCHOR In. (mm)	
A	1-1/2 < 2	(38.1 < 50.8)
B	2 < 2-1/2	(50.8 < 63.5)
C	2-1/2 < 3	(63.5 < 76.2)
D	3 < 3-1/2	(76.2 < 88.9)
E	3-1/4 < 4	(88.9 < 101.6)
F	4 < 4-1/2	(101.6 < 114.3)
G	4-1/2 < 5	(114.3 < 127.0)
H	5 < 5-1/2	(127.0 < 139.7)


*Located on top of anchor for easy inspection.

INSTALLATION STEPS

Installation Steps for Concrete, Lightweight Concrete and Metal Deck




1. Using the proper size carbide bit (see chart) drill a pilot hole at least 1" deeper than anchor embedment. "C"




2. Using an **electric impact wrench**, or socket wrench (hand install) insert anchor into hole and tighten anchor until fully seated. (see chart for socket size) (do not over tighten).

Installation Steps for Hollow or Grout-Filled CMU

(3/8" and 1/2" diameter)



1. Using a 5/16" (for 3/8" LDT) or 7/16" (for 1/2" LDT) carbide tipped bit, drill a pilot hole at least 1" deeper than anchor embedment. "C"



2. Using a socket wrench insert anchor into hole and hand tighten (only) anchor until fully seated. (9/16" socket for 3/8" and 3/4" socket for 1/2") (do not over tighten).



LDT's can be installed by hand or with an impact wrench


Installation by hand—is easy, simply using a socket wrench



Installation by impact wrench—is recommended for faster installations or for high volume projects. Installation with impact wrench—is **not** recommended for hollow block.

Selection Chart

LDT Size	ANSI Standard Drill Bit Diameter	A Anchor Head (Socket Size) Diameter	Washer Diameter	B Minimum Embedment	C Hole Depth	USE IN		
						Concrete	CMU	
							Hollow	Grout-filled
LDT 3/8"	5/16"	9/16"	13/16"	1-1/2"	2-1/2"	YES	YES	YES
LDT 1/2"	7/16"	3/4"	1"	2-1/2"	3-1/2"	YES	NO	YES
LDT 5/8"	1/2"	13/16"	1-3/16"	2-3/4"	3-3/4"	YES	NO	YES
LDT 3/4"	5/8"	15/16"	1-5/16"	3-1/4"	4-1/4"	YES	NO	YES



C See catalog for effective lengths and length indication code.

PERFORMANCE TABLE

LDT Anchors Ultimate Tension and Shear Values (Lbs/kN) in Concrete

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	1,336 (5.9)	2,108 (9.4)	1,652 (7.3)	2,764 (12.3)	1,968 (8.8)	3,416 (15.2)
	2 (50.8)	1,492 (6.6)	3,036 (13.5)	2,024 (9.0)	3,228 (14.4)	2,552 (11.4)	3,420 (15.2)
	2-1/2 (63.5)	3,732 (16.6)	3,312 (14.7)	3,748 (16.7)	3,364 (15.0)	3,760 (16.7)	3,424 (15.2)
	3-1/2 (88.9)	5,396 (24.0)	3,312 (14.7)	6,624 (29.5)	3,368 (15.0)	7,852 (34.9)	3,428 (15.2)
1/2 (12.7)	2 (50.8)	3,580 (15.9)	5,644 (25.1)	3,908 (17.4)	6,512 (29.0)	4,236 (18.8)	7,380 (32.8)
	3-1/2 (88.9)	7,252 (32.3)	6,436 (28.6)	8,044 (35.8)	7,288 (32.4)	8,836 (39.3)	8,140 (36.2)
	4-1/2 (114.3)	10,176 (45.3)	7,384 (32.8)	10,332 (46.0)	7,968 (35.4)	10,488 (46.7)	8,552 (38.0)
5/8 (15.9)	2-3/4 (69.9)	5,276 (23.5)	8,656 (38.5)	6,560 (29.2)	11,064 (49.2)	7,844 (34.8)	13,476 (59.9)
	3-1/2 (88.9)	7,972 (35.5)	10,224 (45.5)	9,848 (43.8)	12,144 (54.0)	11,724 (52.2)	14,060 (62.5)
	4-1/2 (114.3)	11,568 (51.5)	12,316 (54.8)	13,432 (59.8)	13,580 (60.4)	16,892 (75.1)	14,840 (66.0)
3/4 (19.1)	3-1/4 (82.6)	6,876 (30.6)	7,140 (31.8)	9,756 (43.4)	10,728 (47.7)	12,636 (56.2)	14,316 (63.6)
	4-1/2 (114.3)	10,304 (45.8)	13,120 (58.4)	14,424 (64.2)	16,868 (75.0)	18,540 (82.5)	20,612 (91.7)
	5-1/2 (139.7)	13,048 (58.0)	17,908 (79.7)	18,156 (80.8)	21,718 (96.9)	23,268 (103.5)	25,652 (114.1)

LDT Anchors Allowable Tension and Shear Values* (Lbs/kN) in Concrete Carbon and Stainless Steel

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	334 (1.5)	527 (2.3)	413 (1.8)	691 (3.1)	492 (2.1)	854 (3.8)
	2 (50.8)	373 (1.7)	759 (3.4)	506 (2.2)	807 (3.6)	638 (2.8)	855 (3.8)
	2-1/2 (63.5)	933 (4.2)	828 (3.7)	937 (4.2)	841 (3.7)	940 (4.2)	856 (3.8)
	3-1/2 (88.9)	1,349 (6.0)	828 (3.7)	1,656 (7.4)	842 (3.7)	1,963 (8.7)	857 (3.8)
1/2 (12.7)	2 (50.8)	895 (4.0)	1,411 (6.3)	977 (4.3)	1,628 (7.2)	1,059 (4.7)	1,845 (8.2)
	3-1/2 (88.9)	1,813 (8.0)	1,609 (7.2)	2,011 (8.9)	1,822 (8.1)	2,209 (9.8)	2,035 (9.0)
	4-1/2 (114.3)	2,544 (11.3)	1,846 (8.2)	2,583 (11.5)	1,992 (8.9)	2,622 (11.7)	2,138 (9.5)
5/8 (15.9)	2-3/4 (69.9)	1,319 (5.9)	2,164 (9.7)	1,640 (7.3)	2,766 (12.3)	1,961 (8.7)	3,369 (15.0)
	3-1/2 (88.9)	1,993 (8.9)	2,556 (11.4)	2,462 (10.9)	3,036 (13.5)	2,931 (13.0)	3,515 (15.6)
	4-1/2 (114.3)	2,892 (12.9)	3,079 (13.7)	3,358 (14.9)	3,395 (15.1)	4,223 (18.8)	3,710 (16.5)
3/4 (19.1)	3-1/4 (82.6)	1,719 (7.6)	1,785 (7.9)	2,439 (10.8)	2,682 (11.9)	3,159 (14.0)	3,579 (15.9)
	4-1/2 (114.3)	2,576 (11.5)	3,280 (14.6)	3,606 (16.0)	4,217 (18.7)	4,635 (20.6)	5,153 (22.9)
	5-1/2 (139.7)	3,262 (14.5)	4,477 (19.9)	4,539 (20.2)	5,445 (24.2)	5,817 (25.9)	6,413 (28.5)

* Allowable values are based upon a 4 to 1 safety factor. (Ultimate/4)

PERFORMANCE TABLE

LDT Anchors		Recommended Edge & Spacing Requirements for Tension Loads* <i>Carbon and Stainless Steel</i>				
ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)		LOAD FACTOR APPLIED AT MIN. EDGE DISTANCE 1-3/4 Inches (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3 Inches (76mm)
3/8 (9.5)	1-1/2 (38.1)	2	(50.8)	70%	6 (152.4)	44%
	2 (50.8)	2	(50.8)	70%	6 (152.4)	44%
	2-1/2 (63.5)	3	(76.2)	70%	6 (152.4)	44%
	3-1/2 (88.9)	4	(101.6)	70%	6 (152.4)	44%
1/2 (12.7)	2 (50.8)	2-1/4	(57.2)	65%	8 (203.2)	27%
	3-1/2 (88.9)	3	(76.2)	65%	8 (203.2)	27%
	4-1/2 (114.3)	4	(101.6)	65%	8 (203.2)	27%

* Edge and spacing distance shall be divided by .75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

For 5/8" and 3/4" LDT Anchors, the critical edge distance for these anchors is 10 times the anchor diameter. The edge distance of these anchors may be reduced to 1-3/4" provided a 0.65 load factor is used for tension loads, a 0.15 load factor is used for shear loads applied perpendicular to the edge, or a 0.60 load factor is used for shear loads applied parallel to the edge. Linear interpolation may be used for intermediate edge distances.

LDT Anchors		Recommended Edge & Spacing Requirements for Shear Loads* <i>Carbon and Stainless Steel</i>				
ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)		LOAD FACTOR APPLIED AT MIN. EDGE DISTANCE 1-3/4 Inches (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3 Inches (76mm)
3/8 (9.5)	1-1/2 (38.1)	3	(76.2)	25%	6 (152.4)	57%
	2 (50.8)	4	(101.6)	25%	6 (152.4)	57%
	2-1/2 (63.5)	5	(127.0)	25%	6 (152.4)	57%
	3-1/2 (88.9)	5	(127.0)	25%	6 (152.4)	57%
1/2 (12.7)	2 (50.8)	5	(127.0)	25%	8 (203.2)	60%
	3-1/2 (88.9)	5	(127.0)	25%	8 (203.2)	60%
	4-1/2 (114.3)	5-1/2	(139.7)	25%	8 (203.2)	60%

* Edge and spacing distances shall be divided by .75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

LDT Anchors		Ultimate Tension Load (Lbs/kN) in Concrete Block <i>(anchors should be installed by hand in hollow block)</i>							
ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	HOLLOW CONCRETE BLOCK				GROUT FILLED CONCRETE BLOCK			
		TENSION Lbs. (kN)		SHEAR Lbs. (kN)		TENSION Lbs. (kN)			
3/8 (9.5)	1-1/2 (38.1)	916	(4.1)	3,176	(14.1)	1,592	(7.1)	3,900	(17.3)
1/2 (12.7)	2-1/2 (63.5)	----	----	----	----	5,924	(26.4)	6,680	(29.7)


PERFORMANCE TABLE

LDT Anchors

Allowable Tension and Shear* (Lbs/kN) in Concrete Block
(anchors should be installed by hand in hollow block)

ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	HOLLOW CONCRETE BLOCK		GROUT FILLED CONCRETE BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1-1/2 (38.1)	229 (1.0)	794 (3.5)	398 (1.8)	975 (4.3)
1/2 (12.7)	2-1/2 (63.5)	----	----	1,481 (6.6)	1,670 (7.4)

* Allowable values are based upon a 4 to 1 safety factor. (Ultimate/4)




LDT Anchors

Anchoring Overhead in 3000 PSI Lightweight Concrete On Metal Deck

ANCHOR	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT In. (mm)	3000PSI (20.7 MPa) CONCRETE			
			ULTIMATE TENSION LOAD Lbs. (kN)		ALLOWABLE WORKING LOAD Lbs. (kN)	
3/8" LDT	5/16 (7.9)	1-1/2 (38.1)	Upper Flute	2,889 (12.9)	722 (3.2)	
			Lower Flute	1,862 (8.3)	465 (2.1)	

The Easy, Fast, High Performing, Removable Tapcon, Now Available in 3/8" and 1/2" Diameter


For use in concrete and concrete block

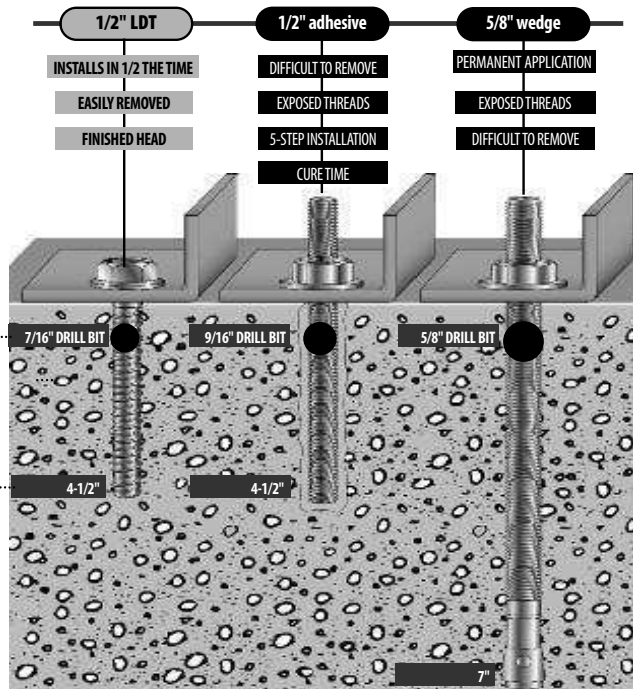

DRILL BIT SIZE REQUIRED
LDT anchors specify a smaller & less expensive drill bit than those required with the 1/2" adhesive threaded rod or the 5/8" wedge.

HOLE DEPTH REQUIRED
At 4-1/2" embedment the LDT anchor will give you performance (2000 PSI concrete) similar to 1/2" adhesive anchor of the same depth or 5/8" wedge anchors at 7" deep. (2000 PSI concrete)

Multi-Set II®



SPECIFIED FOR ANCHORAGE INTO CONCRETE

Drop-In, shell-type anchors feature an internally threaded, all-steel shell with expansion cone insert and flush

embedment lip. "Anchors are manufactured from zinc-plated carbon steel, 18-8 stainless steel and 316 stainless steel.

Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994 specifications.

Anchors should be tested to ASTM E488 criteria and listed by ICC (formerly ICBO). Anchors should also be listed by the following agencies as required by the local building code: UL, FM, City of Los Angeles, California State Fire Marshal and Cal Trans.

APPROVALS/LISTINGS

Meets or exceeds U.S. Government G.S.A. Specification A-A-55614 Type 1 (Formerly GSA: FF-S-325 Group VIII)

Underwriters Laboratories


Factory Mutual

City of Los Angeles – #RR2748

California State Fire Marshal


Caltrans

INSTALLATION STEPS




To set anchor flush with surface:


1. Drill hole to required embedment (see Table on page 73).



2. Clean hole with pressurized air.



3. Drive anchor flush with surface of concrete.



4. Expand anchor with setting tool provided (see chart). Anchor is properly expanded when shoulder of setting tool is flush with top of anchor.

To set anchor below surface:

Drill hole deeper than anchor length. Thread bolt into anchor. Hammer anchor into hole until bolt head is at desired depth. Remove bolt and set anchor with setting tool.

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Concrete*

BOLT DIA. In. (mm)	ANCHOR DIA. In. (mm)	MIN. EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	TENSION Lbs. (kN)			SHEAR Lbs. (kN)
				f'c = 2000 PSI (13.8 MPa)	f'c = 4000 PSI (27.6 MPa)	f'c = 6000 PSI (41.4 MPa)	f'c > 2000 PSI (13.8 MPa)
1/4 (6.4)	3/8 (9.5)	1 (25.4)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	1,680 (7.5)	2,360 (10.5)	2,980 (13.3)	1,080 (4.8)
3/8 (9.5)	1/2 (12.7)	1-5/8 (41.3)		2,980 (13.3)	3,800 (16.9)	6,240 (27.8)	3,160 (14.1)
1/2 (12.7)	5/8 (15.9)	2 (50.8)		3,300 (14.7)	5,840 (26.0)	8,300 (36.9)	4,580 (20.4)
5/8 (15.9)	7/8 (22.2)	2-1/2 (63.5)		5,500 (24.5)	8,640 (38.4)	11,020 (49.0)	7,440 (33.1)
3/4 (19.1)	1 (25.4)	3-3/16 (81.0)		8,280 (36.8)	9,480 (42.2)	12,260 (54.5)	10,480 (46.6)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

* For continuous extreme low temperature applications, use stainless steel.

Combined Tension and Shear Loading—for Multi-Set Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t)^{5/3} + (V_s/V_t)^{5/3} \leq 1$$

P_s = Applied tension load

V_s = Applied shear load

P_t = Allowable tension load

V_t = Allowable shear load

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Lightweight Concrete*

BOLT DIA. In. (mm)	ANCHOR DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	LIGHTWEIGHT CONCRETE f'c = 3000 PSI (20.7 MPa)		LOWER FLUTE OF STEEL DECK WITH LIGHTWEIGHT CONCRETE FILL f'c = 3000 PSI (20.7 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1/2 (12.7)	1-5/8 (39.7)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	2,035 (9.1)	1,895 (8.4)	3,340 (14.9)	4,420 (19.6)
1/2 (12.7)	5/8 (15.9)	2 (50.8)		2,740 (12.2)	2,750 (12.2)	3,200 (14.2)	4,940 (22.0)
5/8 (15.9)	7/8 (22.2)	2-1/2 (63.5)		4,240 (18.9)	4,465 (19.9)	5,960 (26.5)	5,840 (26.0)
3/4 (19.1)	1 (25.4)	3-3/16 (81.0)		5,330 (23.7)	6,290 (28.0)	8,180 (36.4)	9,120 (40.6)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Multi-Set II Drop-In Anchors

Recommended Edge and Spacing Distance Requirements*

BOLT DIA. In. (mm)	DRILL BIT SIZE In. (mm)	EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. EDGE DISTANCE AT WHICH LOAD FACTOR APPLIED =.80 FOR TENSION =.70 FOR SHEAR In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING BETWEEN ANCHORS LOAD FACTOR APPLIED =.80 FOR TENSION =.55 FOR SHEAR In. (mm)
1/4 (6.4)	3/8 (9.5)	1 (25.4)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	1-3/4 (44.5)	7/8 (22.2)	3-1/2 (88.9)	1-3/4 (44.5)
3/8 (9.5)	1/2 (12.7)	1-5/8 (41.3)		2-7/8 (73.0)	1-7/16 (36.5)	5-11/16 (144.5)	2-7/8 (73.0)
1/2 (12.7)	5/8 (15.9)	2 (50.8)		3-1/2 (88.9)	1-3/4 (44.5)	7 (177.8)	3-1/2 (88.9)
5/8 (15.9)	7/8 (22.2)	2-1/2 (63.5)		4-3/8 (111.1)	2-3/16 (55.6)	8-3/4 (222.3)	4-3/8 (111.1)
3/4 (19.1)	1 (25.4)	3-3/16 (81.0)		5-5/8 (142.9)	2-13/16 (71.4)	11-3/16 (284.2)	5-5/8 (142.9)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (Lbs/kN) for RX-series (3/4" and 1" Embedment)*


BOLT DIA. In. (mm)	DRILL BIT SIZE In. (mm)	EMBEDMENT In. (mm)	2500 PSI (17.2 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE		HOLLOW CORE	
			TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/8 (9.5)	1/2 (12.7)	3/4 (19.1)	1,571 (7.0)	2,295 (10.2)	1,987 (8.8)	2,903 (12.9)	1,908 (8.5)	2,401 (10.7)
1/2 (12.7)	5/8 (15.9)	1 (25.4)	2,113 (9.4)	2,585 (11.5)	2,673 (11.9)	3,270 (14.5)	2,462 (11.0)	2,401 (10.7)

* The tabulated values are for RX anchors installed at a minimum of 12 diameters on center and minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameters spacing and 3 diameter edge distance provided the values are reduced 50 percent. Linear Interpolation may be used for intermediate spacings and edge margins.

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Multi-Set II Drop-In Anchors


Anchoring Overhead in 3000 PSI Lightweight Concrete On Metal Deck

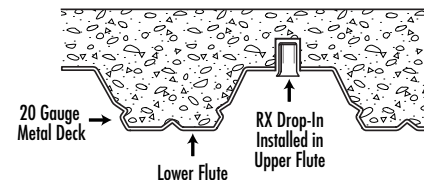

ANCHOR	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT In. (mm)	3000PSI (20.7 MPa) CONCRETE			
			ULTIMATE TENSION LOAD Lbs. (kN)		ALLOWABLE WORKING LOAD Lbs. (kN)	
RX-38 Drop-In	1/2 (12.7)	3/4 (19.1)	Upper Flute	1,410 (6.3)	353 (1.6)	
			Lower Flute	1,206 (5.4)	301 (1.3)	

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Boa™ Coil Expansion Anchor

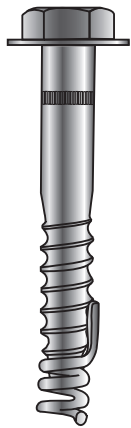

SPECIFIED FOR ANCHORAGE INTO CONCRETE


The Boa™ Coil is a high performance expansion anchor providing through fixture fastening and easy removal to keep the job moving. It's reusable with the coil replacement anchors making this anchor a low cost solution.

Ideal combination of value, performance and reusability make the Boa Coil the choice for Forming and tilt-wall contractors



Standard replacement coils for 1/2", 5/8", and 3/4" diameter bolts
Replacement coil available for easy re-use with Red Head Boa Coil Anchors only.

INSTALLATION STEPS

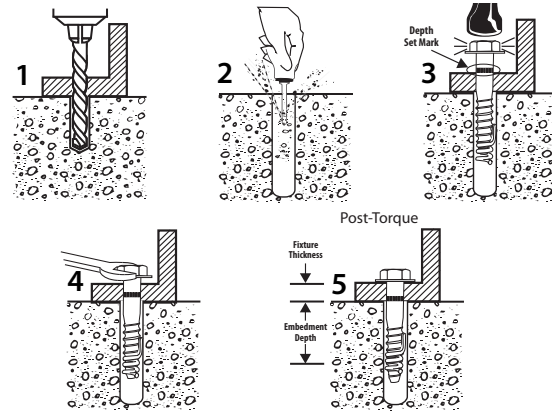

NOTE: To achieve maximum loads the installation process needs to be carried out as follows:

- Using the fixture as a template, drill the correct diameter and depth hole.
- Remove debris with vacuum or hand pump.
- Insert the assembled Boa Coil anchor. (The coil anchor tab points up the anchor.) Tap anchor down to depth set mark and stop.
- Tighten until washer is firmly held to the fixture and stop. Number of turns to set anchor: 1/2" 3-4 turns, 5/8" and 3/4" 4-5 turns. Ensure washer is tight and snug fit.
- The Boa Coil anchor is ready to take load. (The bolt can be removed leaving the coil in the hole.)

The Boa coil anchor can be reused up to 3 times in new holes.

Boa Coil Anchors Ultimate concrete/steel capacity in concrete (1)

ANCHOR DIAMETER In. (mm)	HOLE DIA. In. (mm)	EFFECTIVE EMBEDMENT DEPTH In. (mm)	FIXTURE HOLE DIA. In. (mm)	TURNS TO SET ANCHOR	ULTIMATE CONCRETE CAPACITY (2) (3)						ULTIMATE STEEL STRENGTH (4)	
					2,000 PSI (13.8 MPa)		4,000 PSI (27.6 MPa)		6,000 PSI (41.4 MPa)		TENSION Lbs. (kN)	SHEAR Lbs. (kN)
					TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)		
1/2 (12.7)	1/2 (12.7)	2 (50.8)	9/16 (14.3)	3-4	4,039 (17.9)	6,070 (27.0)	5,715 (25.4)	8,590 (38.2)	6,994 (31.1)	10,516 (46.8)	19,384 (86.2)	14,456 (64.3)
		3 (76.2)	9/16 (14.3)	3-4	7,403 (32.9)	12,082 (53.7)	10,471 (46.6)	17,089 (76.0)	12,822 (57.0)	20,937 (93.1)		
5/8 (15.9)	5/8 (15.9)	2-3/8 (60.3)	11/16 (17.5)	4-5	5,291 (23.5)	8,800 (39.1)	7,483 (33.3)	12,445 (55.4)	9,162 (40.8)	15,242 (67.8)	30,152 (134.1)	21,937 (97.6)
		3-7/8 (98.4)	11/16 (17.5)	4-5	10,855 (48.3)	19,999 (89.0)	15,355 (68.3)	28,285 (125.8)	18,802 (83.6)	34,636 (154.0)		
3/4 (19.1)	3/4 (19.1)	3-1/4 (82.6)	13/16 (20.6)	4-5	8,479 (37.7)	16,567 (73.7)	11,991 (53.3)	23,427 (104.2)	14,682 (65.3)	28,690 (127.6)	43,360 (192.9)	32,031 (142.5)
		4-1/2 (114.3)	13/16 (20.6)	4-5	13,555 (60.3)	27,239 (121.2)	19,171 (85.3)	38,518 (171.3)	23,478 (104.4)	47,173 (209.8)		


(1) Use lower value of either concrete or steel (2) Concrete capacity based on Concrete Capacity Design method and verified by test data (3) Influence factors must be applied to concrete strength values (4) Steel strength based on .57 Fu Ag for shear and 0.75 Fu Ag for tension (5) Test results when reused four times; maximum 20% reduction in tensile capacity; no reduction in shear

Boa Coil Anchors Allowable concrete/steel capacity in concrete (1)


ANCHOR DIAMETER In. (mm)	HOLE DIA. In. (mm)	EFFECTIVE EMBEDMENT DEPTH In. (mm)	FIXTURE HOLE DIA. In. (mm)	TURNS TO SET ANCHOR	RECOMMENDED WORKING LOADS IN CONCRETE (2) (3)						ALLOWABLE STEEL STRENGTH (4)	
					2,000 PSI (13.8 MPa)		4,000 PSI (27.6 MPa)		6,000 PSI (41.4 MPa)		TENSION Lbs. (kN)	SHEAR Lbs. (kN)
					TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)	TENSION (5) Lbs. (kN)	SHEAR Lbs. (kN)		
1/2 (12.7)	1/2 (12.7)	2 (50.8)	9/16 (14.3)	3-4	1,011 (4.5)	1,517 (6.7)	1,430 (6.4)	2,147 (9.5)	1,751 (7.8)	2,629 (11.7)	8,529 (37.9)	5,579 (24.8)
		3 (76.2)	9/16 (14.3)	3-4	1,852 (8.2)	3,020 (13.4)	2,619 (11.6)	4,272 (19.0)	3,208 (14.3)	5,234 (23.3)		
5/8 (15.9)	5/8 (15.9)	2-3/8 (60.3)	11/16 (17.5)	4-5	1,324 (5.9)	2,200 (9.8)	1,872 (8.3)	3,111 (13.8)	2,293 (10.2)	3,810 (16.9)	13,266 (59.0)	8,466 (37.7)
		3-7/8 (98.4)	11/16 (17.5)	4-5	2,715 (12.1)	5,000 (22.2)	3,840 (17.1)	7,071 (31.5)	4,703 (20.9)	8,660 (38.5)		
3/4 (19.1)	3/4 (19.1)	3-1/4 (82.6)	13/16 (20.6)	4-5	2,121 (9.4)	4,141 (18.4)	2,999 (13.3)	5,556 (24.7)	3,673 (16.3)	7,172 (31.9)	19,078 (84.9)	12,362 (55.0)
		4-1/2 (114.3)	13/16 (20.6)	4-5	3,390 (15.1)	6,810 (30.3)	4,794 (21.3)	9,630 (42.8)	5,872 (26.2)	11,793 (52.4)		

(1) Use lower value of either concrete or steel (2) Safety factor 4 (3) Influence factors must be applied to concrete strength values (4) Steel strength based on .22 Fu Ag for shear and 0.33 Fu Ag for tension (5) Test results when reused four times; maximum 20% reduction in tensile capacity; no reduction in shear

Prima Concrete & Masonry Fastening

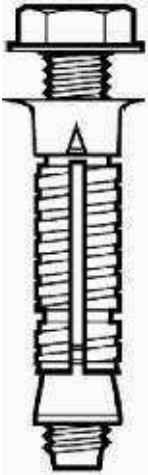


INSTALLATION STEPS

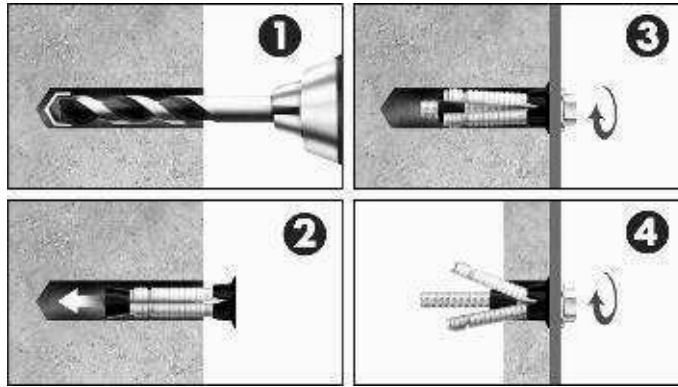

1. Drill a hole with the proper drill bit diameter (see selection chart). Clean hole thoroughly.
2. Insert the Prima sleeve entirely in the hole without the fixture.
3. Position the fixture to be anchored, twist the Prima bolt until it is flush with the fixture.
4. Tighten the Prima bolt to the specified installation torque (see performance table).

APPLICATIONS


- Industrial doors
- Storage racking
- Signs
- Security shutters
- Gate & fence posts, and Spiral staircase
- Hand rail

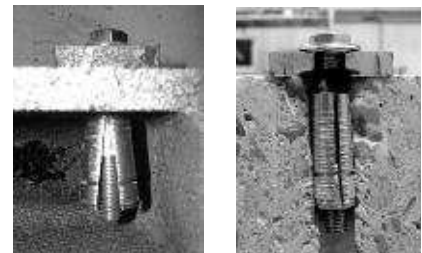

SELECTION CHART

Prima Sleeve Anchors

PART NUMBER	BOLT DIA.	SOCKET SIZE	FIXTURE HOLE DIA.	DRILL BIT DIA.	EFFECTIVE EMBEDMENT DEPTH	DRILLED HOLE DEPTH ¹	MAXIMUM FIXTURE THICKNESS	BOLT LENGTH	QTY/WT PER BOX	QTY/WT PER MASTER
	In. (mm) d	In. (mm)	In. (mm) d _f	In. (mm) d _o	In. (mm) h _{ef}	In. (mm) h _{hole}	In. (mm) t _{fix}	In. (mm) L	Lbs.	Lbs.
RHPA-1423	1/4 (6)	7/16 (12)	5/16 (8)	7/16 (12)	1-1/2 (38)	2-1/2 (64)	3/8 (10)	2-3/8 (60)	50 / 2.8	300 / 17.0
RHPA-1426	1/4 (6)	7/16 (12)	5/16 (8)	7/16 (12)	1-1/2 (38)	2-3/4 (70)	1 (25)	2-3/4 (70)	50 / 4.3	300 / 25.9
RHPA-3830	3/8 (10)	9/16 (14)	1/2 (12)	5/8 (16)	2 (51)	3 (76)	3/8 (10)	3 (76)	25 / 5.0	150 / 29.7
RHPA-3834	3/8 (10)	9/16 (14)	1/2 (12)	5/8 (16)	2 (51)	3 (76)	1 (25)	3-1/2 (89)	25 / 5.4	150 / 32.5
RHPA-3844	3/8 (10)	9/16 (14)	1/2 (12)	5/8 (16)	2 (51)	3 (76)	2 (51)	4-1/2 (114)	25 / 6.2	150 / 37.3
RHPA-1234	1/2 (12)	3/4 (19)	9/16 (14)	13/16 (20)	2-1/2 (64)	3-1/2 (89)	3/8 (10)	3-1/2 (89)	20 / 8.1	120 / 48.5
RHPA-1251	1/2 (12)	3/4 (19)	9/16 (14)	13/16 (20)	2-1/2 (64)	3-1/2 (89)	2 (51)	5-1/8 (130)	20 / 9.4	120 / 56.1

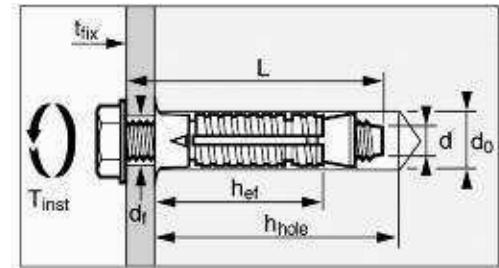

¹ Drilled hole depth is based on maximum fixture thickness; if fixture thickness is less than the maximum, the Prima bolt might reach the bottom of the hole prior to proper installation. $h_{hole} > L - t_{fix}$ (the drilled hole depth must be larger than the difference of the bolt length and the fixture thickness)

Prima Sleeve Anchors Ultimate Tension and Shear Values in Concrete (Lbs/kN)¹⁻³

BOLT DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6)	10 (14)	7/16 (12)	1-1/2 (38)	2,404 (10.7)	2,141 (9.5)	3,400 (15.1)	2,650 (11.8)	4,164 (18.5)	3,159 (14.1)
3/8 (10)	40 (54)	5/8 (16)	2 (51)	4,758 (21.2)	5,812 (25.9)	6,729 (29.9)	6,408 (28.5)	8,242 (36.7)	7,004 (31.2)
1/2 (12)	60 (81)	13/16 (20)	2-1/2 (63)	6,027 (26.8)	8,872 (39.5)	8,524 (37.9)	9,381 (41.7)	10,440 (46.4)	9,889 (44.0)

¹ Mean ultimate loads are derived from test results in admissible service conditions ² Minimum slab thickness is 4" for 1/4" and 3/8" bolt diameters ³ Minimum slab thickness is 5" for 1/2" bolt diameter

Prima Sleeve Anchors Allowable Tension and Shear Values in Concrete (Lbs/kN)¹⁻³

BOLT DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6)	10 (14)	7/16 (12)	1-1/2 (38)	601 (2.7)	535 (2.4)	850 (3.8)	663 (2.9)	1,041 (4.6)	790 (3.5)
3/8 (10)	40 (54)	5/8 (16)	2 (51)	1,190 (5.3)	1,453 (6.5)	1,682 (7.5)	1,602 (7.1)	2,060 (9.2)	1,751 (7.8)
1/2 (12)	60 (81)	13/16 (20)	2-1/2 (63)	1,507 (6.7)	2,218 (9.9)	2,131 (9.5)	2,345 (10.4)	2,610 (11.6)	2,472 (11.0)

¹ Allowable load values are based on a 4 to 1 safety factor to the ultimate loads. ² Minimum slab thickness is 4" for 1/4" and 3/8" bolt diameters ³ Minimum slab thickness is 5" for 1/2" bolt diameter

Prima Sleeve Anchors Ultimate Tension and Shear Values in Concrete Block (Lbs/kN)^{1, 2}

BOLT DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	HOLLOW		GROUT FILLED	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6)	5 (7)	7/16 (12)	1-1/2 (38)	996 (4.4)	1,894 (8.4)	3,162 (14.1)	2,459 (10.9)
3/8 (10)	10 (13)	5/8 (16)	2 (51)	1,035 (4.6)	1,914 (8.5)	4,803 (21.4)	6,579 (29.3)
1/2 (12)	17 (23)	13/16 (20)	2-1/2 (63)	1,379 (6.1)	2,390 (10.6)	6,209 (27.6)	8,711 (38.7)

¹ Data was obtained from ASTM C 90 normal weight load bearing concrete masonry units. ² Grout data is based on a 28-day compressive strength of 2,500 psi.

Prima Sleeve Anchors Allowable Tension and Shear Values in Concrete Block (Lbs/kN)¹

BOLT DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	ANCHOR DIA. In. (mm)	EMBEDMENT DEPTH In. (mm)	HOLLOW		GROUT FILLED	
				TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6)	5 (7)	7/16 (12)	1-1/2 (38)	249 (1.1)	474 (2.1)	791 (3.5)	615 (2.7)
3/8 (10)	10 (13)	5/8 (16)	2 (51)	259 (1.2)	479 (2.1)	1,201 (5.4)	1,645 (7.3)
1/2 (12)	17 (23)	13/16 (20)	2-1/2 (63)	345 (1.5)	598 (2.7)	1,552 (6.9)	2,178 (9.7)

¹ Allowable load values are based on a 4 to 1 safety factor to the ultimate loads.

See web site for brick data.

Dynabolt Sleeve



SPECIFIED FOR ANCHORAGE INTO CONCRETE, GROUT-FILLED CONCRETE BLOCK, HOLLOW CONCRETE BLOCK AND BRICK


Sleeve type anchors feature a split expansion sleeve over a threaded stud bolt body and integral expander, nut and washer.

Anchors are made of Zinc-Plated Carbon Steel, or Type 304 Stainless Steel.


Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.

Anchors are tested to ASTM E488 criteria.


INSTALLATION STEPS



1. Use a bit with a diameter equal to the anchor. See selection chart to determine proper size bit for anchor used. Drill hole to any depth exceeding minimum embedment. Clean hole.



2. Insert assembled anchor into hole, so that washer or head is flush with materials to be fastened.



3. Expand anchor by tightening nut or head 2 to 3 turns.

APPROVALS/LISTINGS

Meets or exceeds U.S. Government G.S.A. Specification A-A-1922A
 (Formerly GSA: FF-S-325 Group II, Type 3, Class 3)

Factory Mutual

California State Fire Marshal

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Concrete (Lbs/kN)*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	BOLT DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE (STEEL)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)	
					TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	3.5 (4.7)	3/16 (4.8)	1-1/8 (28.6)	Carbon or Stainless	1,200 (5.3)	1,620 (7.2)	1,600 (7.1)	1,620 (7.2)	2,100 (9.3)	1,620 (7.2)
5/16 (7.9)	8 (10.8)	1/4 (6.4)	1-1/4 (31.8)		1,400 (6.2)	2,040 (9.1)	1,920 (8.5)	2,220 (9.9)	2,600 (11.6)	2,400 (10.7)
3/8 (9.5)	14 (19.0)	5/16 (7.9)	1-1/2 (38.1)		1,620 (7.2)	2,560 (11.4)	2,240 (10.0)	2,800 (12.5)	3,100 (13.8)	3,040 (13.5)
1/2 (12.7)	20 (27.1)	3/8 (9.5)	1-7/8 (47.6)		2,220 (9.9)	4,000 (17.8)	3,140 (14.0)	4,500 (20.0)	4,400 (19.6)	5,000 (22.2)
5/8 (15.9)	48 (65.1)	1/2 (12.7)	2 (50.8)		3,080 (13.7)	6,440 (28.6)	4,400 (19.6)	7,240 (32.2)	6,120 (27.2)	8,080 (35.9)
3/4 (19.1)	90 (122.0)	5/8 (15.9)	2-1/4 (57.2)		4,200 (18.7)	10,200 (45.4)	6,060 (27.0)	11,600 (51.6)	8,900 (39.6)	13,100 (58.3)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values. The tabulated values are for anchors installed in a minimum of 12 diameters on center and a minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameter spacing and 3 diameter edge distance, provided the values are reduced 50 percent. Linear interpolation may be used for intermediate spacings and edge distances.

* For continuous extreme low temperature applications, use stainless steel.

Dynabolt Sleeve Anchors Ultimate Tension and Shear Values in Lightweight Concrete (Lbs/kN)*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	BOLT DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE (STEEL)	f'c = 4000 PSI (27.6 MPa)		f'c = 6000 PSI (41.4 MPa)	
					TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	3.5 (4.7)	3/16 (4.8)	1-1/8 (28.6)	Carbon or Stainless	1,080 (4.8)	1,160 (5.2)	1,220 (5.4)	1,940 (8.6)
5/16 (7.9)	8 (10.8)	1/4 (6.4)	1-1/4 (31.8)		1,260 (5.6)	1,680 (7.5)	1,440 (6.4)	2,220 (9.9)
3/8 (9.5)	14 (19.0)	5/16 (7.9)	1-1/2 (38.1)		1,620 (7.2)	2,300 (10.2)	2,240 (10.0)	2,800 (12.5)
1/2 (12.7)	25 (33.9)	3/8 (9.5)	1-7/8 (47.6)		2,600 (11.6)	3,920 (17.4)	3,160 (14.1)	4,840 (21.5)
5/8 (15.9)	48 (65.1)	1/2 (12.7)	2 (50.8)		3,240 (14.4)	5,600 (24.9)	4,300 (19.1)	7,840 (34.9)
3/4 (19.1)	90 (122.0)	5/8 (15.9)	2-1/4 (57.2)		3,640 (16.2)	8,640 (38.4)	5,800 (25.8)	12,480 (55.5)

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values. The tabulated values are for anchors installed in a minimum of 12 diameters on center and a minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameter spacing and 3 diameter edge distance, provided the values are reduced 50 percent. Linear interpolation may be used for intermediate spacings and edge distances.

Dynabolt Sleeve Anchors Ultimate Tension and Shear Values in Concrete Masonry Units (Lbs/kN)*

ANCHOR DIA. In. (mm)	INSTALLATION TORQUE Ft. Lbs. (Nm)	BOLT DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	ANCHOR TYPE (STEEL)	LIGHTWEIGHT				MEDIUM WEIGHT			
					HOLLOW CORE		GROUT FILLED		HOLLOW CORE		GROUT FILLED	
					TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	3.5 (4.7)	3/16 (4.8)	1-1/8 (28.6)	Carbon	1,120 (5.0)	1,360 (6.0)	1,120 (5.0)	1,360 (6.0)	1,120 (5.0)	1,620 (7.2)	1,120 (5.0)	1,360 (6.0)
				Stainless	640 (2.8)	1,620 (7.2)	640 (2.8)	1,620 (7.2)	640 (2.8)	1,620 (7.2)	640 (2.8)	1,620 (7.2)
3/8 (9.5)	15 (20.3)	5/16 (7.9)	1-1/2 (38.1)	Carbon	1,360 (6.0)	2,560 (11.4)	1,360 (6.0)	2,560 (11.4)	1,360 (6.0)	2,560 (11.4)	1,360 (6.0)	2,560 (11.4)
				Stainless	1,160 (5.2)	2,560 (11.4)	1,160 (5.2)	2,560 (11.4)	1,160 (5.2)	2,560 (11.4)	1,160 (5.2)	2,560 (11.4)
1/2 (12.7)	25 (33.9)	3/8 (9.5)	1-7/8 (47.6)	Carbon	--	--	2,220 (9.9)	4,000 (17.8)	--	--	2,220 (9.9)	4,000 (17.8)
				Stainless	--	--	2,100 (9.3)	4,000 (17.8)	--	--	2,100 (9.3)	4,000 (17.8)
5/8 (15.9)	55 (74.6)	1/2 (12.7)	2 (50.8)	Carbon	--	--	3,080 (13.7)	6,440 (28.6)	--	--	3,080 (13.7)	6,440 (28.6)
				Stainless	--	--	3,080 (13.7)	6,440 (28.6)	--	--	2,820 (12.5)	6,440 (28.6)
3/4 (19.1)	90 (122.0)	5/8 (15.9)	2-1/2 (63.5)	Carbon	--	--	4,200 (18.7)	10,200 (45.4)	--	--	4,200 (18.7)	10,200 (45.4)
				Stainless	--	--	--	--	--	--	--	--

* Allowable values are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values. The tabulated values are for anchors installed in a minimum of 12 diameters on center and a minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameter spacing and 3 diameter edge distance, provided the values are reduced 50 percent. Linear interpolation may be used for intermediate spacings and edge distances.

Combined Tension and Shear Loading—for Dynabolt Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t) + (V_s/V_t) \leq 1$$

P_s = Applied tension load

V_s = Applied shear load

P_t = Allowable tension load

V_t = Allowable shear load

Stud Anchor



SPECIFIED FOR ANCHORAGE INTO CONCRETE

Stud Anchors feature a bolt body and pre-assembled expander plug. Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.

Anchors are tested to ASTM E488 criteria. Anchors are listed by the following agencies as required: UL and FM.

APPROVALS/LISTINGS


Meets or exceeds U.S. Government G.S.A. specification A-A-55614 Type 2 (Formerly GSA: FF-S-325 Group VIII, Type 2)

California State Fire Marshal


Factory Mutual

Underwriters Laboratories


INSTALLATION STEPS



1. Drill hole same diameter as anchor to embedment specified in chart. Clean hole.



2. Drive anchor with expander plug in bottom, through material to be fastened.



3. Expand anchor by driving anchor over plug with hammer.

Note: Recommended thickness of concrete for bottom-bearing anchors = embedment depth + three times anchor diameter

Stud Anchors Ultimate Tension and Shear Values in Concrete (Lbs/kN)

ANCHOR DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 4000 PSI (27.6 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1-3/8 (34.9)	1,120 (5.0)	580 (2.6)	1,500 (6.7)	1,640 (7.3)
3/8 (9.5)	1-5/8 (41.3)	1,740 (7.7)	2,280 (10.1)	3,160 (14.1)	3,360 (14.9)
1/2 (12.7)	1-7/8 (47.6)	2,680 (11.9)	5,320 (23.7)	4,020 (17.9)	5,100 (22.7)
5/8 (15.9)	2-3/8 (60.3)	3,200 (14.2)	5,460 (24.3)	5,520 (24.6)	6,820 (30.3)
3/4 (19.1)	2-7/8 (73.0)	4,020 (17.9)	8,100 (36.0)	7,520 (33.5)	8,560 (38.1)

Allowable loads are based upon a 4 to 1 safety factor. Divide by 4 for allowable load values.

Stud Anchors Recommended Edge and Spacing Distance Requirements*

ANCHOR DIA. In. (mm)	MINIMUM EMBEDMENT DEPTH In. (mm)	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. EDGE DISTANCE AT WHICH LOAD FACTOR APPLIED = .90 FOR TENSION = .65 FOR SHEAR In. (mm)	SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD In. (mm)	MIN. ALLOWABLE SPACING BETWEEN ANCHORS LOAD FACTOR APPLIED = .90 FOR TENSION = .50 FOR SHEAR In. (mm)
1/4 (6.4)	1-3/8 (34.9)	2-7/16 (61.9)	1-1/4 (31.8)	4-13/16 (122.2)	2-7/16 (61.9)
3/8 (9.5)	1-5/8 (41.3)	2-7/8 (73.0)	1-7/16 (36.5)	5-11/16 (144.5)	2-7/8 (73.0)
1/2 (12.7)	1-7/8 (47.6)	3-5/16 (84.1)	1-11/16 (42.9)	6-9/16 (166.7)	3-5/16 (84.1)
5/8 (15.9)	2-3/8 (60.3)	4-3/16 (106.4)	2-1/8 (54.0)	8-5/16 (211.1)	4-3/16 (106.4)
3/4 (19.1)	2-7/8 (73.0)	5-1/16 (128.6)	2-9/16 (65.1)	10-1/16 (255.6)	5-1/16 (128.6)

* Linear interpolation may be used for intermediate spacing and edge distances.

Combined Tension and Shear Loading—for Stud Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation: $(Ps/Pt)^{5/3} + (Vs/Vt)^{5/3} \leq 1$

Ps = Applied tension load Vs = Applied shear load Pt = Allowable tension load Vt = Allowable shear load

Redi-Drive Anchors



SPECIFIED FOR ANCHORAGE INTO CONCRETE, BLOCK AND BRICK


The Redi-Drive is a high performance small diameter one-piece hammer-drive anchor. The anchor holds based on a friction principle—the shank diameter is larger than the drill hole size. Anchors shall be installed with carbide-tipped hammer drill bits made in accordance to ANSI B212.15-1994.

The Redi-Drive is available in four types... mushroom head, pipe-hanging (1/4" & 3/8") FM approved (on 3/8"), Tie-Wire, and double-head forming versions. Anchor performance in solid concrete at one inch embedment shall exceed 400 lbs. allowable tension load and 750 lbs. allowable shear load.

APPROVALS/LISTINGS


Meets or exceeds U.S. Government G.S.A. Specification FF-S-325 Group VI
Factory Mutual (3/8" pipe-drive)

INSTALLATION STEPS FOR REDI-DRIVE & FORMING ANCHORS

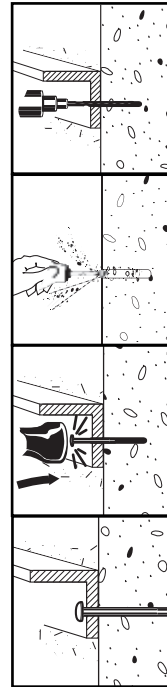


1. Drill a proper-sized diameter hole at a minimum depth (see chart on page 50, ANSI B212.15-1994).
2. Clean hole.
Please note hole is 3/16" but diameter of Redi-Drive is 1/4" (except for PD8-134 and FD8-234)
3. Insert anchor through material to be fastened (insert tie-wire or pipe version Redi-Drive anchors into drilled holes) and drive anchor with a 3-lb. hammer until the head is flush with surface or desired embedment.

Anchor is now set for Redi-Drive Anchor.



Anchor is now set for Forming Anchor.


INSTALLATION STEPS FOR REDI-DRIVE TIE-WIRE ANCHORS

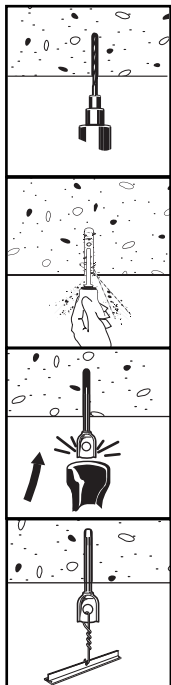

1. Drill a proper-sized diameter hole at a minimum depth (see chart on page 50, ANSI B212.15-1994).
2. Clean hole.
Please note hole is 3/16" but diameter of Redi-Drive is 1/4" (except for PD8-134 and FD8-234)
3. Insert anchor through material to be fastened (insert tie-wire or pipe version Redi-Drive anchors into drilled holes) and drive anchor with a 3-lb. hammer until the head is flush with surface or desired embedment.


Anchor is now set.

INSTALLATION STEPS FOR REDI-DRIVE PIPE-DRIVE ANCHORS

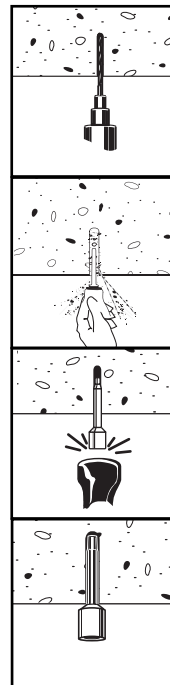

1. Drill a proper-sized diameter hole at a minimum depth (see chart on page 50, ANSI B212.15-1994).
2. Clean hole.
3. Insert anchor through material to be fastened (insert tie-wire or pipe version Redi-Drive anchors into drilled holes) and drive anchor with a 3-lb. hammer until the head is flush with surface or desired embedment.

Anchor is now set.



Redi-Drive Anchors Anchoring Overhead in 3000 PSI Lightweight Concrete On Metal Deck

ANCHOR	DRILL HOLE DIAMETER In. (mm)	EMBEDMENT In. (mm)	3000PSI (20.7 MPa) CONCRETE			
			ULTIMATE TENSION LOAD Lbs. (kN)		ALLOWABLE WORKING LOAD Lbs. (kN)	
3/8" Pipe Drive	1/4 (6.4)	1-1/2 (38.1)	Upper Flute	1,099 (4.9)	275 (1.2)	(1.2)
			Lower Flute	994 (4.4)	249 (1.1)	(1.1)

Safe working loads for single installations under static loading conditions should not exceed 25% of the ultimate capacity.

Redi-Drive Anchors Ultimate Tension and Shear Values (Lbs/kN) in Concrete, Hollow Block and Grout Filled

SHANK DIA. ANCHOR	EMBEDMENT In. (mm)	4500 PSI (31.0 MPa)		CMU (HOLLOW BLOCK) PSI (MPa)		CMU (GROUT FILLED) PSI (MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
Redi-Drive	3/4 (19.1)	1,215 (5.4)	1,857 (8.3)	382 (1.7)	683 (3.0)	731 (3.3)	1,614 (7.2)
	1 (25.4)	1,667 (7.4)	3,112 (13.8)	392 (1.7)	987 (4.4)	870 (3.9)	1,766 (7.9)
	1-1/4 (31.8)	2,373 (10.6)	3,355 (14.9)	398 (1.8)	1,381 (6.1)	1,543 (6.9)	2,778 (12.4)
Tie-Drive or 1/4" Pipe-Drive	1-1/4 (31.8)	2,372 (10.6)	-- --	-- --	-- --	-- --	-- --
3/8" Pipe-Drive	1-1/2 (38.1)	2,090 (9.3)	-- --	-- --	-- --	-- --	-- --

Safe working loads for single installations under static loading conditions should not exceed 25% of the ultimate capacity.

The tabulated values are for anchors installed in a minimum of 12 diameters on center and a minimum edge distance of 10 diameters for 100 percent anchor efficiency. Space and edge distance may be reduced to six diameters spacing and five diameter edge distance provided values are reduced 50%. Linear interpolation may be used for intermediate spacing and edge margins.

SELECTION CHART

Redi-Drive Anchors

Typical Applications—
Electrical boxes, conduit clips, and duct work



PART NUMBER	HEAD DIA. In. (mm)	DRILL BIT SIZE In. (mm)	TOTAL LENGTH In. (mm)	MIN. EMBEDMENT In. (mm)	MAX. FIXTURE THICKNESS In. (mm)	CLEARANCE HOLE SIZE In. (mm)	QTY/WT PER BX lbs.	QTY/WT PER MASTER CARTON lbs.
RD4-034	7/16 (11.1)	3/16 (4.8)	3/4 (19.1)	11/16 (17.5)	1/16 (1.6)	1/4 (6.4)	100/ 1.4	1000/15
RD4-118	7/16 (11.1)	3/16 (4.8)	1-1/8 (28.6)	3/4 (19.1)	3/8 (9.5)	1/4 (6.4)	100/ 1.6	1000/17
RD4-158	7/16 (11.1)	3/16 (4.8)	1-5/8 (41.3)	3/4 (19.1)	7/8 (22.2)	1/4 (6.4)	100/ 2.2	1000/23
RD4-200	7/16 (11.1)	3/16 (4.8)	2 (50.8)	3/4 (19.1)	1-1/4 (31.8)	1/4 (6.4)	100/ 2.6	1000/26
RD4-212	7/16 (11.1)	3/16 (4.8)	2-1/2 (63.5)	3/4 (19.1)	1-3/4 (44.5)	1/4 (6.4)	100/ 3.2	1000/33
RD4-300	7/16 (11.1)	3/16 (4.8)	3 (76.2)	3/4 (19.1)	2-1/4 (57.2)	1/4 (6.4)	100/ 3.7	1000/37

Tie Wire Typical Applications—
Acoustical ceilings, suspended electrical fixture, pencil rod



PART NUMBER	HEAD SIZE O.D. In. (mm)	DRILL BIT SIZE In. (mm)	TOTAL LENGTH In. (mm)	MIN. EMBEDMENT In. (mm)	HEAD HEIGHT In. (mm)	HEAD SIZE I.D.	QTY/WT PER BX lbs.	QTY/WT PER MASTER CARTON lbs.
TD4-112	3/16 (4.8)	3/16 (4.8)	2-1/8 (54.0)	1-1/4 (31.8)	5/8 (15.9)	9/32" hole	100/ 3.5	1000/35

Pipe Hanging Typical Applications—
Fire sprinkler, water lines, steam/gas, cable tray, electrical conduits



PART NUMBER	INTERNAL THREAD SIZE I.D.	DRILL BIT SIZE In. (mm)	TOTAL LENGTH In. (mm)	MIN. EMBEDMENT In. (mm)	HEAD HEIGHT In. (mm)	INTERNAL THREADED DIAMETER O.D. In. (mm)	QTY/WT PER BX lbs.	QTY/WT PER MASTER CARTON lbs.
PD4-112	1/4 - 20"	3/16 (4.8)	2-1/8 (54.0)	1-1/4 (31.8)	5/8 (15.9)	13/32 (10.3)	100/ 3.0	1000/30
PD8-134	3/8 - 16"	1/4 (6.4)	2-1/2 (63.5)	1-3/4 (44.5)	3/4 (19.1)	9/16 (14.3)	100/ 6.0	1000/61

Forming
Wood attachments to concrete are common Redi-Drive applications, whether permanent or temporary



PART NUMBER	HEAD SIZE O.D. In. (mm)	DRILL BIT SIZE In. (mm)	TOTAL LENGTH In. (mm)	MIN. EMBEDMENT In. (mm)	HEAD HEIGHT In. (mm)	HEAD SIZE I.D.	QTY/WT PER BX lbs.	QTY/WT PER MASTER CARTON lbs.
FD6-234	7/16 (11.1)	3/16 (4.8)	2-3/4 (69.9)	1-1/4 (31.8)	N/A	N/A	100/ 3.1	1000/31
FD8-234	7/16 (11.1)	1/4 (6.4)	2-3/4 (69.9)	1-1/4 (31.8)	N/A	N/A	100/ 5.6	1000/56

Tapcon® Concrete and Masonry Anchors



SPECIFIED FOR ANCHORAGE INTO CONCRETE, BRICK OR BLOCK

The "original masonry" anchor that cuts its own threads into concrete, brick, or block. Maximum performance is achieved because the Tapcon Anchor, the Condrive Installation Tool, and the carbide-tipped Tapcon Drill Bits are designed to work as a system. It is essential to use the Condrive tool and the correct drill bit to assure consistent anchor performance.

Now available in 410 stainless steel.

APPROVALS/LISTINGS

ICC Evaluation Service, Inc. – #ESR-1671

ICC Evaluation Service, Inc. – #ESR-2202

Miami-Dade County – #07-0315.03

Florida Building Code





Hex Head style on Tapcon Anchors is available for majority of fixture anchoring needs

Climaseal® Coating is standard on all Tapcon anchors to provide extended corrosion resistance

Now available in 410 Stainless Steel

Phillips Flat Head style is available when flush seating is necessary in countersink applications

Advanced Threadform cuts into masonry materials for greater pullout values


Lengths of Tapcon Anchors range from 1-1/4" to 4" in 3/16" and up to 6" in 1/4" diameters.

Nail-Type Point guides the anchor into the pre-drilled hole. Excellent for wood to concrete applications



INSTALLATION STEPS

Read instructions before using (installation)!




WARNING: If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-899-7890. Failure to follow these instructions can result in serious personal injury.

1. **Select proper fastener – diameter / head style / length**
 - a) **Use selection chart to choose proper length.**
2. **Drill Hole – use selection chart to determine drill bit length and depth of hole**
 - a) **Choose appropriate drill bit based upon diameter of Tapcon Anchor.**
 - b) **Drill hole minimum 7" deeper than Tapcon Anchor to be embedded.**


Minimum anchor embedment: 1"

Maximum anchor embedment: 1-3/4"

3. Drive Anchor




WARNING: Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).




WARNING: Using the wrong size drill bit will affect performance values and may cause failure.

Head Styles

3/16" diameter has a 1/4" slotted hex washer head (HWH)
1/4" diameter has a 5/16" slotted hex washer head (HWH)



3/16" diameter uses a #2 phillips flat head (PFH)
1/4" diameter uses a #3 phillips flat head (PFH)



PERFORMANCE TABLE

Tapcon Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Concrete

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 5000 PSI (34.5 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/16 (4.8)	1 (25.4)	600 (2.7)	720 (3.2)	625 (2.8)	720 (3.2)	650 (2.9)	720 (3.2)	800 (3.6)	860 (3.8)
	1-1/4 (31.8)	845 (3.7)	720 (3.2)	858 (3.8)	720 (3.2)	870 (3.9)	720 (3.2)	1,010 (4.5)	860 (3.8)
	1-1/2 (38.1)	1,090 (4.8)	860 (3.8)	1,090 (4.8)	860 (3.8)	1,090 (4.8)	860 (3.8)	1,220 (5.4)	860 (3.8)
	1-3/4 (44.5)	1,450 (6.5)	870 (3.9)	1,455 (6.5)	870 (3.9)	1,460 (6.5)	990 (4.4)	1,730 (7.7)	990 (4.4)
1/4 (6.4)	1 (25.4)	750 (3.3)	900 (4.0)	775 (3.4)	900 (4.0)	800 (3.6)	1,360 (6.1)	950 (4.2)	1,440 (6.4)
	1-1/4 (31.8)	1,050 (4.7)	900 (4.0)	1,160 (5.2)	900 (4.0)	1,270 (5.6)	1,360 (6.1)	1,515 (6.7)	1,440 (6.4)
	1-1/2 (38.1)	1,380 (6.1)	1,200 (5.3)	1,600 (7.2)	1,200 (5.3)	1,820 (8.1)	1,380 (6.1)	2,170 (9.7)	1,670 (7.4)
	1-3/4 (44.5)	2,020 (9.0)	1,670 (7.4)	2,200 (9.8)	1,670 (7.4)	2,380 (10.6)	1,670 (7.4)	2,770 (12.3)	1,670 (7.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

PERFORMANCE TABLE

Tapcon Anchors

Ultimate Tension and Shear Values (Lbs/kN) in Hollow Block

ANCHOR DIA. In. (mm)	ANCHOR EMBEDMENT In. (mm)	LIGHTWEIGHT BLOCK		MEDIUM WEIGHT BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
3/16 (4.8)	1 (25.4)	220 (1.0)	400 (1.8)	340 (1.5)	730 (3.2)
1/4 (6.4)	1 (25.4)	250 (1.1)	620 (2.8)	500 (2.2)	1,000 (4.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

PERFORMANCE TABLE

Tapcon[®] Anchors

Allowable Edge and Spacing Distances

PARAMETER	ANCHOR DIA. Inch	NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
		FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	3/16	3	1-1/2	0.73	3	1-1/2	1.00
	1/4	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	3/16	3	1-1/2	0.83	3	1-1/2	1.00
	1/4	4	2	0.82	4	2	0.81
Edge Distance - Tension	3/16	1-7/8	1	0.71	4	2	0.91
	1/4	2-1/2	1-1/4	0.78	4	2	0.88
Edge Distance - Shear	3/16	2-1/4	1-1/8	0.70	4	2	0.93
	1/4	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm



National Headquarters

2171 Executive Drive, Suite 100
Addison, IL 60101
Phone: 630-350-0370
Fax: 630-495-6158
www.itwredhead.com

Technical Support

Phone: 800-899-7890
Fax: 630-495-6204

Customer Service Locations

1919 E. U.S. Hwy 12
Michigan City, IN 46360
800-348-3231
FAX: 800-368-3844

Regional Warehouses

- Itasca (Chicago), IL
- City of Commerce (Los Angeles), CA
- Forest Park, GA
- Cranbury, NJ
- Dallas, TX
- Houston, TX

ITW Construction Products Canada

120 Travail Road
Markham, Ontario. L3S 3J1
905-471-7403
800-387-9692
FAX: 800-668-8688
www.itwconstruction.ca

Take Advantage of these Contractor Services from ITW RED HEAD

From job sites to engineering firms, from Safety Seminars to on-site services, we hope you take advantage of our many contractor services—at no charge! After all, it's one thing to offer the quality products you need to do your job. It's another to provide you with superior service, engineering expertise and total product support.

At ITW RED HEAD, we are proud of the partnerships we have built through the years with our distributor network and contractors. Thanks to quality products, innovative services and on-time delivery, we will continue to build new relationships and strengthen existing ones today...and into the next century.

- Factory representatives with years of training and service experience will go out to your job site to provide you with product, service and technical assistance.




- We provide architects and engineers with complete submittal packages which gives them the technical data needed to specify ITW RED HEAD products. Contact your ITW RED HEAD Distributor or your nearest Customer Service location to request submittal packages.

Technical Application Assistance:

- Our staff of application specialists are ready to assist you with any type of application or code approval question during any phase of your project. Call **1-800-899-7890** between 8:00 a.m. and 5:00 p.m. CST, Monday through Friday.

24-hour Product and Performance Information:

- The most frequently requested ITW RED HEAD product and technical information, performance data, approvals, MSDS, etc. are available on our website at www.itwredhead.com. If additional assistance is required, our application specialists can be reached at **1-800-899-7890** between 8:00 a.m. and 5:00 p.m. CST, Monday through Friday.



The information and recommendations in this document are based on the best information available to us at the time of preparation. We make no other warranty, expressed or implied, as to its correctness or completeness, or as to the results or reliance of this document.

A7, Boa, C6, Condrive, Dynabolt, E-Z Ancor, G5, Hammer-Set, Multi-Set II, Poly Set, LDT, Red Head, Redi-Drive, Tapcon, and Trubolt are trademarks of ITW RED HEAD and Illinois Tool Works, Inc. Hilti is a registered trademark of Hilti, Corp. Rawl Spike is a registered trademark of Powers Fastening, Inc.