

IN ROOFING...
ONE SIZE **DOES NOT** FIT ALL!



TRI-BUILT

“Weather or Not”



Our Popular Plastic Roof Cement
Now Available in “Easy to Handle”
3.5 Gallon Pail.

Flashing Roof Cement - 5 Gal


Plastic Roof Cement - 5 & 3.5 Gal

Fibred Aluminum
Exterior Coating - 5 Gal

Non-Fibred Aluminum
Roof Coating - 5 Gal

Modified Bitumen Adhesive
Trowel Grade - 5 Gal

Modified Bitumen Adhesive
Brush Grade - 5 Gal

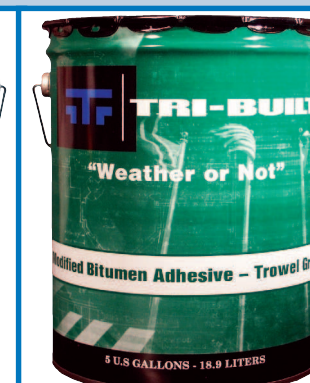

	Flashing Roof Cement		Plastic Roof Cement		Fibered Aluminum Exterior Coating		Non-Fibered Aluminum Roof Coating		Modified Bitumen Adhesive Trowel Grade		Modified Bitumen Adhesive Brush Grade	
PRODUCT DESCRIPTION	TRI-BUILT Flashing Roof Cement is general-purpose repair cement manufactured with asphalt, solvent and asbestos free fibers designed for repairing leaks on asphalt, concrete and metal roof surfaces. Conforms to ASTM D-4586.		TRI-BUILT Plastic Roof Cement is general-purpose repair cement manufactured with asphalt, solvent and asbestos free fibers designed for repairing leaks on asphalt, concrete and metal roof surfaces. Conforms to ASTM D-4586.		TRI-BUILT Fibered Aluminum Exterior Coating is an aluminum asphalt based coating for protecting and extending the service life of built up roofs, modified bitumen membranes and metal roofs. Conforms to ASTM D-2824 Type III and ASTM D-3805.		TRI-BUILT Non-Fibered Aluminum Roof Coating is an aluminum asphalt based coating for protecting and extending the service life of built up roofs, modified bitumen membranes and metal roofs. Conforms to ASTM D-2824 Type I and ASTM D-3805.		TRI-BUILT Modified Bitumen Adhesive - Trowel Grade is a rubberized, fibered adhesive designed for cold-applying SBS Modified Bitumen Membranes. The use of TRI-BUILT Modified Bitumen Adhesive - Trowel Grade eliminates the need for torches or heating of materials. Conforms to ASTM D-3019 Type III.		TRI-BUILT Modified Bitumen Adhesive – Brush Grade is a rubberized, fibered adhesive designed for cold-applying SBS Modified Bitumen Membranes. The use of TRI-BUILT Modified Bitumen Adhesive – Brush Grade eliminates the need for torches or heating of materials. Conforms to ASTM D-3019 Type III.	
USES	TRI-BUILT Flashing Roof Cement is ideal for repairing leaks in asphalt roofs, shingles, concrete, brick and metal roofs. Use also for sealing chimneys, gutters, downspouts and for general-purpose exterior building repairs.		TRI-BUILT Plastic Roof Cement is ideal for repairing leaks in asphalt roofs, shingles, concrete, brick and metal roofs. Use also for sealing chimneys, gutters, downspouts and for general-purpose exterior building repairs.		TRI-BUILT Fibered Aluminum Exterior Coating may be used to coat built up asphalt roofs, modified bitumen membranes, metal corrugated roofs, mobile homes, tractor-trailer roofs, and any other type of metal roof surface.		TRI-BUILT Non-Fibered Aluminum Roof Coating may be used to coat built up asphalt roofs, modified bitumen membranes, metal corrugated roofs, mobile homes, tractor-trailer roofs, and any other type of metal roof surface.		TRI-BUILT Modified Bitumen Adhesive - Trowel Grade is used as an adhesive with SBS Modified Bitumen Membrane base, ply and cap sheets. This product is ideal for flashing vertical surfaces and around penetrations including vents, pipes and around skylights.		TRI-BUILT Modified Bitumen Adhesive – Brush Grade is used to as an adhesive for use with SBS Modified Bitumen Membrane base, ply and cap sheets.	
APPLICATION	All surfaces should be clean and dry prior to application. Apply at a nominal thickness of 1/8" (8 gallons per 100 square feet) onto the surface. Be sure to work cement into joints and cracks. For repairing blisters and breaks, apply TRI-BUILT Flashing Roof Cement then embed fabric reinforcement followed by another application of cement. Apply with a trowel. Tools and Equipment may be cleaned with mineral spirits.		All surfaces should be clean and dry prior to application. Apply at a nominal thickness of 1/8" (8 gallons per 100 square feet) onto the surface. Be sure to work cement into joints and cracks. For repairing blisters and breaks, apply TRI-BUILT Plastic Roof Cement then embed fabric reinforcement followed by another application of cement. Apply with a trowel. Tools and Equipment may be cleaned with mineral spirits.		Mix material thoroughly prior to application. All surfaces should be clean and dry prior to application. Apply at a rate of 1 – 1.5 gallons per 100 Sq.Ft. with a brush or roller in one direction. New asphalt built-up roofs and newly coated asphalt roofs should be allowed to weather a minimum of 90 days before coating. Modified bitumen membranes should be coated as soon as possible after installation. Tools and Equipment may be cleaned with mineral spirits.		Mix material thoroughly prior to application. All surfaces should be clean and dry prior to application. Apply at a rate of 1/2 – 1 gallon per 100 Sq.Ft. with a brush or roller in one direction. New asphalt built-up roofs and newly coated asphalt roofs should be allowed to weather a minimum of 90 days before coating. Modified bitumen membranes should be coated as soon as possible after installation. Tools and Equipment may be cleaned with mineral spirits.		Prior to application, all surfaces should be clean and dry. It is recommended to cut modified bitumen membranes prior to installation and lay flat on roof. This will prevent the membranes from recoiling and lifting at the edges. This product is not intended to be used with membranes that contain a polyethylene or other backing film. For vertical applications it is recommended to mechanically fasten top of membrane. Apply TRI-BUILT Modified Bitumen Adhesive - Trowel Grade at a nominal thickness of 1/8" (8 gallons per 100 square feet) based on the absorptive ability and/or irregularity of the surface. Apply with a serrated trowel. Tools and Equipment may be cleaned with mineral spirits.		Prior to application, all surfaces should be clean and dry. It is recommended to cut modified bitumen membranes prior to installation and lay flat on roof. This will prevent the membranes from recoiling and lifting at the edges. This product is not intended to be used with membranes that contain a polyethylene or other backing film. Apply TRI-BUILT Modified Bitumen Adhesive – Brush Grade at the rate of 1-2 gallons per square based on the absorptive ability and/or irregularity of the surface. Apply with a serrated squeegee, brush or roller. For vertical applications use TRI-BUILT Modified Bitumen Adhesive - Trowel Grade. Tools and Equipment may be cleaned with mineral spirits.	
CAUTION	Combustible mixture. Do not use near open flame. Before using, read applicable MSDS. Keep out of reach of children. Do not swallow. Use with adequate ventilation. Avoid prolonged or repeated contact with skin and avoid getting into eyes. Wash hands and exposed areas thoroughly after skin contact and always before eating or drinking. Wear proper respiratory protection in confined areas. Do not thin. Dispose of in an environmentally safe manner. For 24 hour Safety, Hazard and Emergency Information, please call 800-451-8346. Maximum VOC 300 Grams Per Liter		Combustible mixture. Do not use near open flame. Before using, read applicable MSDS. Keep out of reach of children. Do not swallow. Use with adequate ventilation. Avoid prolonged or repeated contact with skin and avoid getting into eyes. Wash hands and exposed areas thoroughly after skin contact and always before eating or drinking. Wear proper respiratory protection in confined areas. Do not thin. Dispose of in an environmentally safe manner. For 24 hour Safety, Hazard and Emergency Information, please call 800-451-8346. Maximum VOC 300 Grams Per Liter		Combustible mixture. Do not use near open flame. Before using, read applicable MSDS. Keep out of reach of children. Do not swallow. Use with adequate ventilation. Avoid prolonged or repeated contact with skin and avoid getting into eyes. Wash hands and exposed areas thoroughly after skin contact and always before eating or drinking. Wear proper respiratory protection in confined areas. Do not thin. Dispose of in an environmentally safe manner. For 24 hour Safety, Hazard and Emergency Information, please call 800-451-8346. Maximum VOC 500 Grams Per Liter		Combustible mixture. Do not use near open flame. Before using, read applicable MSDS. Keep out of reach of children. Do not swallow. Use with adequate ventilation. Avoid prolonged or repeated contact with skin and avoid getting into eyes. Wash hands and exposed areas thoroughly after skin contact and always before eating or drinking. Wear proper respiratory protection in confined areas. Do not thin. Dispose of in an environmentally safe manner. For 24 hour Safety, Hazard and Emergency Information, please call 800-451-8346. Maximum VOC 500 Grams Per Liter		Combustible mixture. Do not use near open flame. Before using, read applicable MSDS, which is available by calling Allied Building Supply Corp. Keep out of reach of children. Do not swallow. Use with adequate ventilation. Avoid prolonged or repeated contact with skin and avoid getting into eyes. Wash hands and exposed areas thoroughly after skin contact and always before eating or drinking. Wear proper respiratory protection in confined areas. Do not thin. Dispose of in an environmentally safe manner. For 24 hour Safety, Hazard and Emergency Information, please call 800-451-8346. Maximum VOC 300 Grams Per Liter		Combustible mixture. Do not use near open flame. Before using, read applicable MSDS. Keep out of reach of children. Do not swallow. Use with adequate ventilation. Avoid prolonged or repeated contact with skin and avoid getting into eyes. Wash hands and exposed areas thoroughly after skin contact and always before eating or drinking. Wear proper respiratory protection in confined areas. Do not thin. Dispose of in an environmentally safe manner. For 24 hour Safety, Hazard and Emergency Information, please call 800-451-8346. Maximum VOC 300 Grams Per Liter	
CONTENTS	Asphalt Mineral Spirits Amorphous Alumina Silicates Cellulose Fibers Attapulgit Clay	8052-42-4 8032-32-4 93763-70-3 9004-34-6 12174-11-7	Asphalt Mineral Spirits Amorphous Alumina Silicates Cellulose Fibers Attapulgit Clay	8052-42-4 8032-32-4 93763-70-3 9004-34-6 12174-11-7	Petroleum Solvent Asphalt Aluminum Flake Diatomaceous Earth	8032-32-4 8052-42-4 7429-90-5 68855-54-9	Asphalt Petroleum Solvent Aluminum Flake Diatomaceous Earth	8052-42-4 8032-32-4 7429-90-5 68855-54-9	Asphalt Aromatic Solvent Attapulgit Clay Cellulose Fibers Styrene-Butadiene Block Copolymer	8052-42-4 64742-95-6 12174-11-7 9004-34-6 9003-55-8	Asphalt Aromatic Solvent Attapulgit Clay Cellulose Fibers Styrene-Butadiene Block Copolymer	8052-42-4 64742-95-6 12174-11-7 9004-34-6 9003-55-8

