


238T PANEL

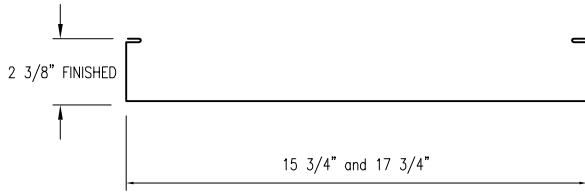

238T PANEL PROFILE
Standard Width(s)- 15 3/4" and 17 3/4"

Applications

Symmetrical structural roof/wall panel used on slopes down to 1/4:12. Continuous length up to 300ft. Tapered panels up to 60ft. Convex and concave curving available.

Substrates

Plywood-Nailers-Subgirts-Purlins-Metal Deck

Standard Materials

Alum-Zinc coated steel

Standard Gauge

24 ga. 22 ga.

Finishes


Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Smooth, Striations, Stiffener Ribs

Manufacturing


Factory, Jobsite

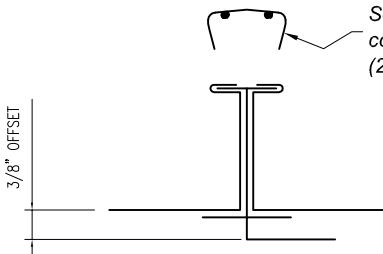


SEAM ENGAGEMENT




STANDARD CLIP
16 GAUGE

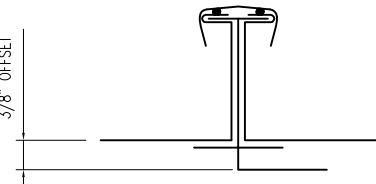


BEFORE SEAMING

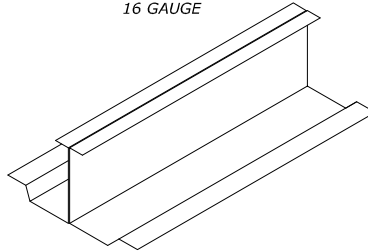


CONTINUOUS CLIP
2-PIECE

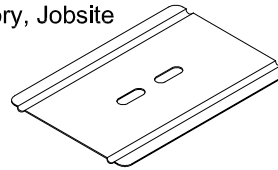


BEARING PLATE
24 GAUGE, 50 KSI STEEL.

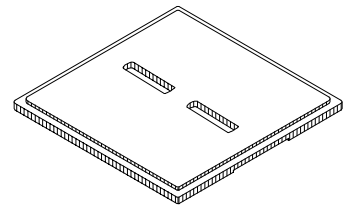


STACKABLE LEVELING SHIM
6" x 6" x 1/4" THICK

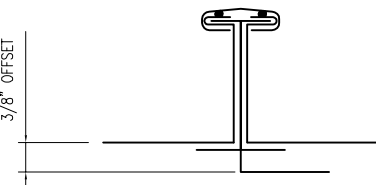


AFTER SEAMING



HAND SEAMER

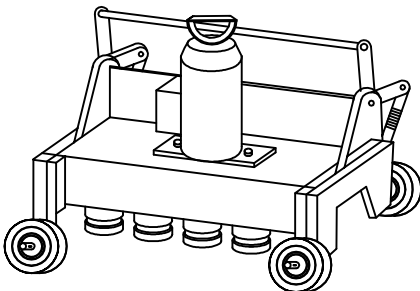

MECHANICAL SEAMER

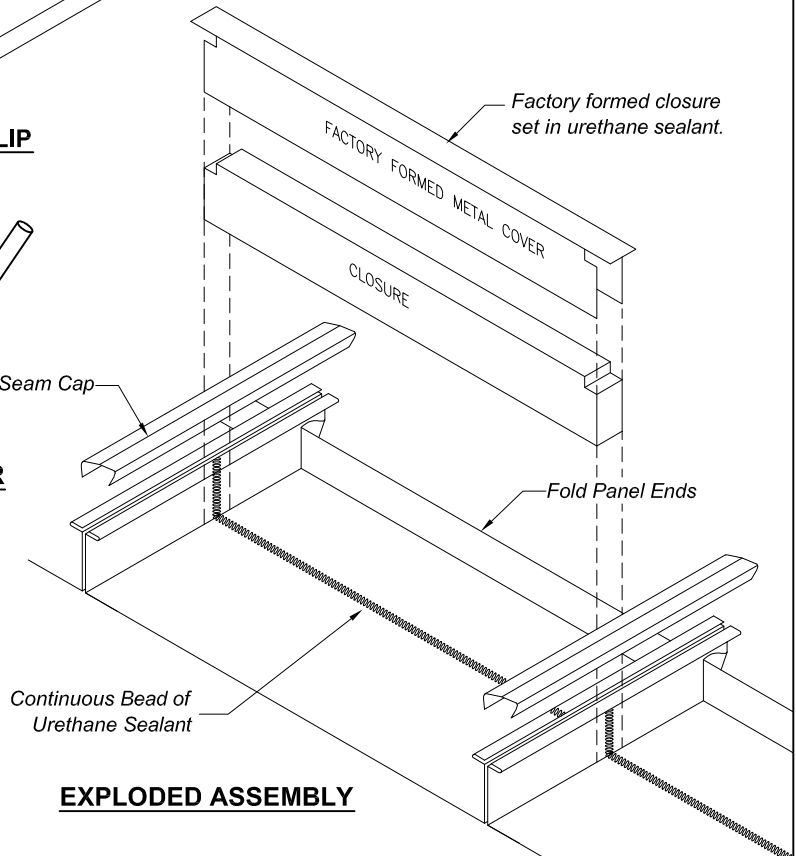

EXPLODED ASSEMBLY