




# Instaloc Standing Seam Panel

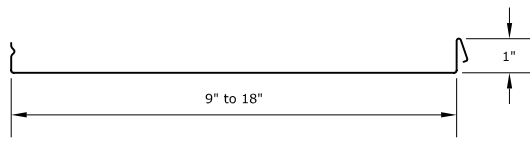

**INSTALOC PROFILE (SMOOTH)**  
Standard Width(s)- 13" and 18"

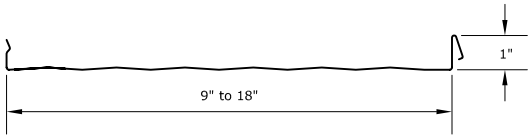

**INSTALOC PROFILE (STRIATIONS)**  
Standard Width(s)- 13" and 18"

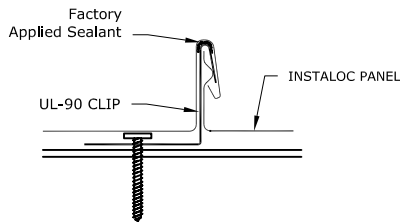

**INSTALOC PANEL SEAM**

**Applications**

Non Structural panel used on roof slopes 3" per foot or greater. Continuous lengths up to 80 ft.

**Substrates**

Plywood - Metal Deck

**Standard Materials**

Alum-Zinc coated steel

**Standard Gauges**

24 ga. 26 ga.

**Finishes**

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

**Texture**


Smooth or Striated

**Manufacturing**


Factory or Jobsite Roll Formed

**Testing / Agency Approvals**


UL 580 Class 90 Uplift - UL-1897 Uplift - Tx Windstorm RC-86 - Tx Windstorm RC-93 - FL-4243 - FL 2804 - UL Class 4 Impact Resistance - UL Class A Fire Rating

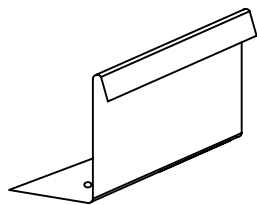

**24 GAUGE INSTALOC CLIP**  
(2 FASTENERS)



**STACKABLE LEVELING SHIM**  
6" x 6" x 1/4" THICK



**BEARING PLATE**  
24 GAUGE, 50 KSI STEEL.