




Permaseam Standing Seam Panel

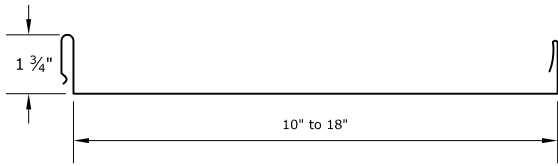

PERMASEAM PANEL PROFILE (SMOOTH)
Standard Width(s)- 10", 12", 16", and 18"

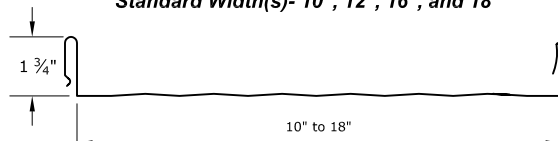

PERMASEAM PANEL PROFILE (STRIATED)
Standard Width(s)- 10", 12", 16", and 18"

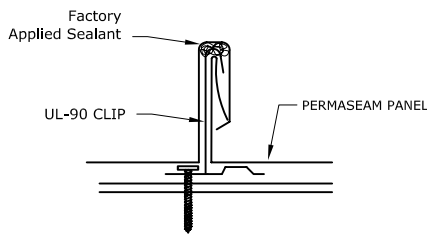

PERMASEAM SEAM

Applications

Structural panel used on roof slopes 2" per foot or greater. Continuous lengths up to 100 ft.

Substrates

Plywood - Metal Deck - Recommended for Solid Deck

Standard Materials

Alum-Zinc coated steel

Standard Gauge

24 ga.

Finishes

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Smooth or Striated

Manufacturing


Factory or Jobsite Roll Formed

Testing / Agency Approvals


UL 580 Class 90 Uplift - Texas Windstorm RC-71 - ASTM E-1680
Air Infiltration - ASTM E-1646 Water Penetration - UL Class 4
Impact Resistance - UL Class A Fire Rating




STANDARD CLIP
(ONE FASTENER) 16 GAUGE



UL-90 CLIP
(2 FASTENERS) 16 GAUGE

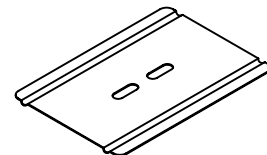

BEARING PLATE
24 GAUGE, 50 KSI STEEL.



STACKABLE LEVELING SHIM
6" x 6" x 1/4" THICK