


SIPLD LIGHT-DUTY #2 DRILL POINT NAILBOARD FASTENER ATTACHING PANELS TO CORRUGATED STEEL (22-18GA)

SCREW LENGTH

Screws should be at least 1" longer than the total thickness of all components, i.e., face of framing to fastener head. For example, an assembly with 5/8" exterior gypsum and 4" nailable insulation (3 1/4" foam + 3/4" wood) has a total thickness of 4 5/8" and requires a minimum 5 5/8" screw. The next available size would be 6".



Screw Length	Maximum Distance Between Deck/Framing and Screw Head	Thread Length
3"	2"	2.750"
3 1/2"	2 1/2"	2.750"
4"	3"	2.750"
4 1/2"	3 1/2"	2.750"
5"	4"	2.750"
5 1/2"	4 1/2"	2.750"
6"	5"	2.750"
6 1/2"	5 1/2"	2.750"
7"	6"	2.750"
7 1/2"	6 1/2"	2.750"
8"	7"	2.750"
8 1/2"	7 1/2"	2.750"
9"	8"	2.750"
9 1/2"	8 1/2"	2.750"
10"	9"	2.750"
11"	10"	2.750"
12"	11"	2.750"
13"	12"	2.750"
14"	13"	2.750"
15"	14"	2.750"
16"	15"	2.750"
18"	17"	2.750"




INSTALLATION FOR ROOF PRODUCTS¹

Nailable Base-3

Multi-Vent Nailable Base-3

Additional fasteners required at roof perimeters and corners. Additional fasteners may also be required based on design (slope, snow loads, uplift, etc.). Consult designer and/or roof cover manufacturer, as well as, Factory Mutual Approval Guide, RoofNav, and Loss Prevention Data Sheets for additional requirements.

4'x8' Panel – 15 fasteners

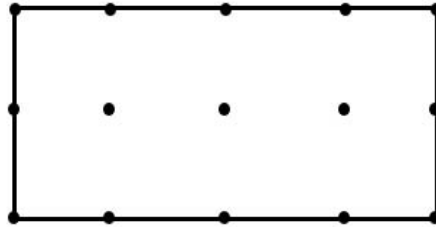

INSTALLATION FOR WALL PRODUCTS¹

ThermaBase™-CI

ECOBASE™

ECOMAXci® FR Ply

Refer to DrJ Technical Evaluation Reports (TER) for fastening pattern and complete guidelines.

¹Other materials, such as gypsum, should be fastened separately per manufacturer's instructions.

Rmax Sales Offices / Plant Locations

Central

13524 Welch Road
Dallas, TX 75244
(P) 972-387-4500
(F) 972-387-4673

East

1649 South Batesville Road
Greer, SC 29650
(P) 864-297-1382
(F) 864-234-7548

West


210 Lyon Drive
Fernley, NV 89408
(P) 775-575-4849
(F) 775-575-5035

SIPHD HEAVY-DUTY #4 DRILL POINT NAILBOARD FASTENER ATTACHING PANELS TO THICK STEEL (16GA-3/16") WITHOUT PRE-DRILLING

SCREW LENGTH

Screws should be at least 1" longer than the total thickness of all components, i.e., face of framing to fastener head. For example, an assembly with 5/8" exterior gypsum and 4" nailable insulation (3 1/4" foam + 3/4" wood) has a total thickness of 4 5/8" and requires a minimum 5 5/8" screw. The next available size would be 6".

Screw Length	Maximum Distance Between Deck/Framing and Screw Head	Thread Length
6"	5"	3.875"
8"	7"	3.875"
9 3/4"	8 3/4"	3.875"
11 3/4"	10 3/4"	3.875"
13 3/4"	12 3/4"	3.875"




INSTALLATION FOR ROOF PRODUCTS¹

Nailable Base-3
Multi-Vent Nailable Base-3

Additional fasteners required at roof perimeters and corners. Additional fasteners may also be required based on design (slope, snow loads, uplift, etc.). Consult designer and/or roof cover manufacturer, as well as, Factory Mutual Approval Guide, RoofNav, and Loss Prevention Data Sheets for additional requirements.

4'x8' Panel – 15 fasteners

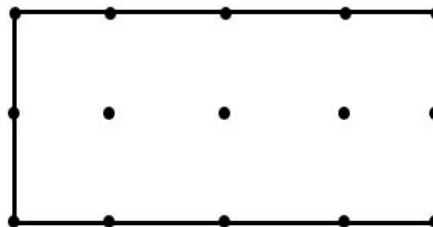

INSTALLATION FOR WALL PRODUCTS¹

ThermaBase™ -CI
ECOBASE™
ECOMAXci® FR Ply

Refer to DrJ Technical Evaluation Reports (TER) for fastening pattern and complete guidelines.

¹Other materials, such as gypsum, should be fastened separately per manufacturer's instructions.

Rmax Sales Offices / Plant Locations


Central 13524 Welch Road Dallas, TX 75244 (P) 972-387-4500 (F) 972-387-4673	East 1649 South Batesville Road Greer, SC 29650 (P) 864-297-1382 (F) 864-234-7548	West 210 Lyon Drive Fernley, NV 89408 (P) 775-575-4849 (F) 775-575-5035
--	--	--

SIPTP GIMLET THREAD POINT NAILBOARD FASTENER

ATTACHING PANELS TO WOOD AND TIMBER

SCREW LENGTH

Screws should be at least 1" longer than the total thickness of all components, i.e., face of framing to fastener head. For example, an assembly with 5/8" exterior gypsum and 4" nailable insulation (3 1/4" foam + 3/4" wood) has a total thickness of 4 5/8" and requires a minimum 5 5/8" screw. The next available size would be 6".

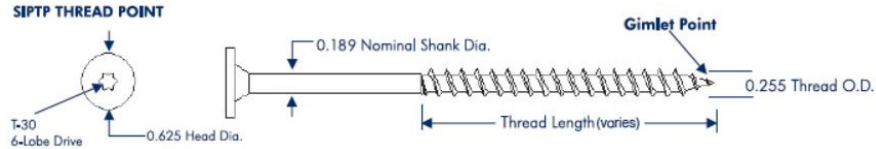

Screw Length	Maximum Distance Between Deck/Framing and Screw Head	Thread Length
2"	1"	1.750"
2 1/2"	1 1/2"	1.750"
3"	2"	2.0"
3 1/2"	2 1/2"	2.0"
4"	3"	2.750"
4 1/2"	3 1/2"	2.750"
5"	4"	2.750"
5 1/2"	4 1/2"	2.750"
6"	5"	2.750"
6 1/2"	5 1/2"	2.750"
7"	6"	2.750"
7 1/2"	6 1/2"	2.750"
8"	7"	2.750"
8 1/2"	7 1/2"	2.750"
9"	8"	2.750"
10"	9"	2.750"
11"	10"	2.750"
12"	11"	2.750"
13"	12"	2.750"
14"	13"	2.750"
15"	14"	2.750"
16"	15"	2.750"
18"	17"	2.750"




INSTALLATION FOR ROOF PRODUCTS¹

Nailable Base-3

Multi-Vent Nailable Base-3

Additional fasteners required at roof perimeters and corners. Additional fasteners may also be required based on design (slope, snow loads, uplift, etc.). Consult designer and/or roof cover manufacturer, as well as, Factory Mutual Approval Guide, RoofNav, and Loss Prevention Data Sheets for additional requirements.

4'x8' Panel – 15 fasteners

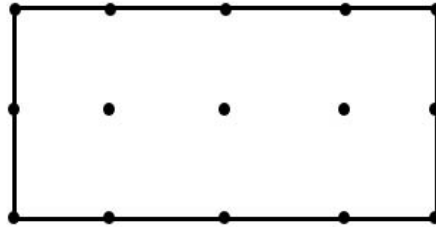

INSTALLATION FOR WALL PRODUCTS¹

ThermaBase™ -CI

ECOBASE™

ECOMAXci® FR Ply

Refer to DrJ Technical Evaluation Reports (TER) for fastening pattern and complete guidelines.

¹Other materials, such as gypsum, should be fastened separately per manufacturer's instructions.

Rmax Sales Offices / Plant Locations

Central

13524 Welch Road
Dallas, TX 75244
(P) 972-387-4500
(F) 972-387-4673

East

1649 South Batesville Road
Greer, SC 29650
(P) 864-297-1382
(F) 864-234-7548

West

210 Lyon Drive
Fernley, NV 89408
(P) 775-575-4849
(F) 775-575-5035