



PROSPEC®

Flooring Preparation Systems





Table of Contents

Our Story	3
Product Portfolio	4
Product Enhancements	5
LEED Standards	6
System Warranty Information	7
Product Selection Matrix	8
Self-Leveling Underlayments	
• Level Set® 300.	10
• Level Set 200	10
• Level Set 100	10
• Level Set Deep Pour 3	10
• Level Set LW-60	11
Self-Leveling Surface Toppings	
• Level Set Wear Topping	11
Primers & Bonding Agent	
• Level Epoxy Primer	12
• Level Set Primer Plus	12
• Level Set Primer	12
• B-730 Mortar / Acrylic Additive	12
Moisture Mitigation	
• Moisture Guard Max	13
Surface Patching & Skimcoating Compounds	
• Feather Edge	14
• Floor Patch Pro	14
Concrete Resurfacing & Rehabilitation	
• Concrete Resurfacer	14
• Vinyl Concrete Patch	14



Our Story

The ProSpec Story — *Oldcastle, Bonsal American and ProSpec®*

Imagine a company capable of providing the modern building materials needed to build a community, even the bridges and highways to get you there. You have just imagined Oldcastle®.

We are North America's largest manufacturer of building products. The Oldcastle portfolio provides a breadth of experience and brand leadership across numerous building material categories. With over \$10 billion in North American sales, we have the financial strength and commitment to be a leader in every category in which we compete. One of these categories includes cementitious bagged products produced by Bonsal American.

Bonsal American, founded in 1895 as W.R. Bonsal & Co., was initially a contractor and supplier to the railroad. In 1947, Bonsal began producing Sakrete and other top quality building products. Bonsal American also manufactures the ProSpec branded product portfolio. We stand firm in our commitment to produce the finest quality products with consistent performance. This commitment gives our customers and the contractors



who use our products the peace of mind that they are getting trusted, quality products.

ProSpec is the professionally specified brand of Tile & Stone Installation Systems, Floor Preparation Systems and Concrete Repair & Restoration products. The business has 50 years of experience producing quality tile grouts and tile setting mortars and over 30 years of producing concrete repair and self-leveling products. This is proven performance you can trust.

We have an expert technical services group that handles all inquiries regarding ProSpec products and their related applications. Our support staff has the hands-on experience and technical background to address any needs you may have, so please don't hesitate to contact us.


**Technical Services
1-800-334-0784**

**Email inquiries to:
prospec@oldcastle.com**



The ProSpec Product Portfolio

ProSpec offers a broad range of cement-based, high-quality products to meet your project needs. The ProSpec portfolio includes a full line of floor preparation and tile and stone installation systems that are backed by best-in-class system warranties. Our broad range of concrete repair and restoration products offer solutions for DOT and road repair, precast and cast in place systems, and concrete rehabilitation projects.

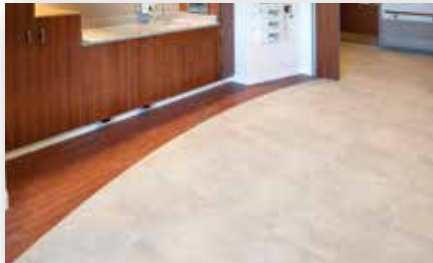

Floor Preparation Systems

- Self-Leveling Underlayments
- Self-Leveling Surface Toppings
- Primers & Bonding Agent
- Moisture Mitigation
- Surface Patching & Skim Coating Compounds
- Concrete Resurfacing & Rehabilitation



Tile & Stone Installation Systems

- Surface Preparation
- Preformed Components
- Crack Isolation Membranes & Waterproofing
- Tile Setting Mortars
- Adhesives & Epoxies
- Tile Grout
- Additives
- Caulks



Concrete Repair & Restoration Products

- Non-Shrink Grouts
- Precast
- Concrete Repair
- Concrete Resurfacing & Rehabilitation
- Damp Proofing & Waterproofing
- Primers & Bonding Agents
- Shotcrete

*Dana Farber Cancer Institute
Boston, Massachusetts*

ProSpec Product Enhancements



Micro Defense® Technology
A special antimicrobial additive that prevents the growth of mold and mildew. All ProSpec ProColor Grouts feature Micro Defense Technology to ensure your installation will remain as beautiful as the day it was installed. Micro Defense is particularly important for installations exposed to moisture.



Rapid Cure Technology – RCT®
Improves the strength, curing, workability, and performance of ProSpec surface preparation and tile products. RCT is our next generation of cement technology beyond portland cement-based systems offering quick, high strength development and fast curing without sacrificing workability or working time. RCT also reduces efflorescence, controls the shrinkage during curing, and provides greater long-term performance.



Expansion Stabilization Technology – EST™
A special additive designed to reduce the potential for cracking and shrinkage by controlling the pre-cure chemical and physical reactions during an underlayment's plastic stage, where up to 80 percent of shrinkage occurs.



**Bank of America Tower
New York, NY – the first LEED
Platinum Skyscraper in the world.**

ProSpec Products used:


- Level Set 300
- Level Set Primer

ProSpec Products Meet LEED Standards

ProSpec is committed to manufacturing environmentally friendly products. Our products can help you achieve LEED certification by contributing towards credits in three areas:

- IEQ 4.1 - 4.3: Low-Emitting Materials for better indoor environmental quality
- MR 4: Recycled Content for responsible raw material selection
- MR 5: Regional Materials, to support the use of local materials and reduce the environmental impacts resulting from transportation

ProSpec Manufacturing & Distribution

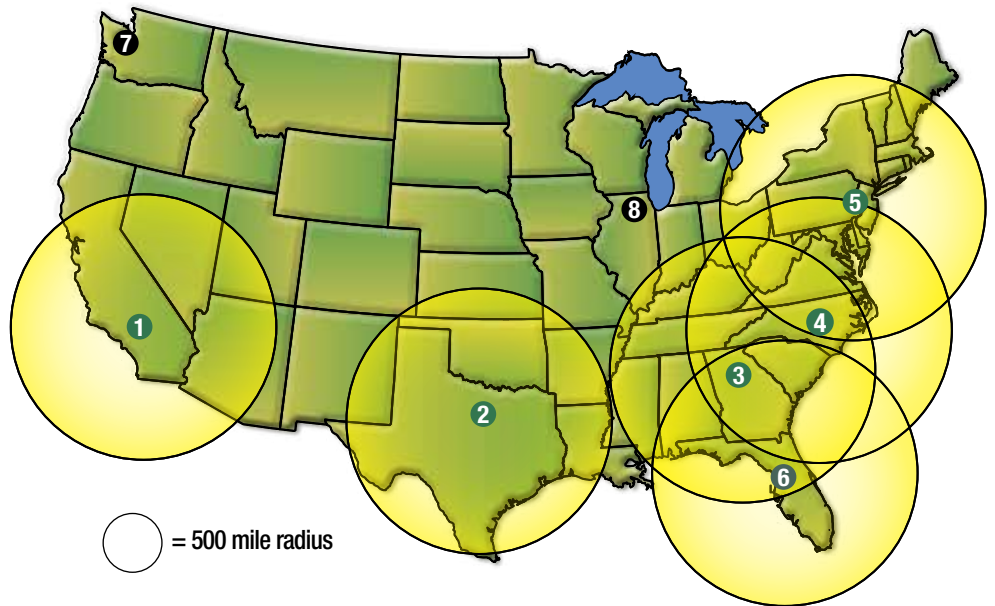

Manufacturing Locations

- | | |
|-----------------|----------------------|
| 1 La Mirada, CA | 4 Lilesville, NC |
| 2 Dallas, TX | 5 Fairless Hills, PA |
| 3 Conley, GA | 6 Tampa, FL |

Distribution Locations

- | |
|---------------------|
| 7 Seattle, WA |
| 8 Franklin Park, IL |

ProSpec can supply product from six manufacturing locations and two distribution locations throughout the United States.

ProSpec Joint Limited System Warranty

ProSpec joint Limited System Warranty with W.F. Taylor, is the best option when it comes to your peace of mind. The quality and performance of the products make this system warranty the only choice for worry-free results. Available in Limited 15-Year, 10-Year, and 5-Year System Warranties! Visit prospec.com for additional detail.

The ProSpec Warranty Covers:

- Interior applications
- Commercial and residential applications

The ProSpec Warranty Guarantees:

- Our products are free of defects
- Will not break down under normal usage

The ProSpec Remedy:

- Replace or repair defective area of the system

Stand-Alone Product Warranties:

- Level Set 300
- Level Set 200
- Level Set 100
- Level Set Deep Pour 3
- Level Set LW-60

WARRANTY DURATION TABLE

15-Year System Warranty	
Moisture Mitigation*	ProSpec Moisture Guard Max*
Priming	ProSpec Level Set Primer Plus / Level Set Epoxy Primer / Level Set Primer
Preparation	ProSpec Level Set 300 or Level Set LW-60
Adhesive	Taylor Adhesive (see approved adhesives below)
10-Year System Warranty	
Priming	ProSpec Level Set Primer Plus / Level Set Epoxy Primer / Level Set Primer
Preparation	ProSpec Level Set 200
Adhesive	Taylor Adhesive (see approved adhesives below)
5-Year System Warranty	
Priming	ProSpec Level Set Primer Plus / Level Set Epoxy Primer / Level Set Primer
Preparation	ProSpec Level Set 100 or Level Set Deep Pour 3
Adhesive	Taylor Adhesive (see approved adhesives below)
Taylor Approved Adhesives	
VCT	<ul style="list-style-type: none"> • 2033 Clear Thin Spread Tile Adhesive • 2083 Tuff-Lok X-Link VCT Adhesive
Sheet Goods	<ul style="list-style-type: none"> • 2037 Fiberglass Backed Sheet Vinyl Pressure Sensitive Adhesive • MS Plus Resilient Flooring Adhesive • 2091 Tuff-Grip TPS Transitional Pressure Sensitive Vinyl & Rubber Flooring Adhesive
Wood	<ul style="list-style-type: none"> • 2071 Tuff-Lok X-Link Wood Flooring Adhesive • MS-Plus Wood Flooring Adhesive
Engineered Wood	<ul style="list-style-type: none"> • 2020 Acrylic Co-Polymer Wood Flooring Adhesive • 2071 Tuff-Lok X-Link Wood Flooring Adhesive • MS Plus Wood Flooring Adhesive
LVT (plank)	<ul style="list-style-type: none"> • 501 Solvent Free Epoxy Flooring Adhesive • 2091 Tuff-Grip TPS Vinyl & Rubber Flooring Adhesive • MS Plus Resilient Flooring Adhesive
Carpet	<ul style="list-style-type: none"> • 2055 Performance Plus Fast Track Carpet Adhesive • 2080 The Legend Dual-Purpose Commercial Grade Adhesive • 2081 Tuff-Lok X-Link Carpet Adhesive • 2085 Pro-Tac Dual-Purpose Adhesive • 2100 Delta Force Fast Grab Carpet Adhesive
Carpet Tile	<ul style="list-style-type: none"> • 2027 Pressure Sensitive Adhesive • 2082 Tuff-Lok X-Link Carpet Tile Adhesive
Rubber	<ul style="list-style-type: none"> • 501 Solvent Free Epoxy Flooring Adhesive • 2091 Tuff-Grip TPS Vinyl & Rubber Flooring Adhesive • MS Plus Resilient Flooring Adhesive






1. For purposes of this warranty, a "system" is a group of ProSpec products set forth in the above warranty duration table that is used in the same installation. Contact ProSpec Technical Services for full warranty details, including application restrictions, prequalification, coverage and remedy details.

* When moisture mitigation is required, Moisture Guard Max must be used to qualify for the warranty. Moisture Guard Max must be used in conjunction with Level Set 300 and Level Set Primer Plus.

** For VCT, Vinyl Sheet Goods, LVT, Wood, Carpet and Carpet Tile only. For Tile or Stone refer to Tile System Warranty.

Contact ProSpec Technical Services for other approved Underlayments and Wear Toppings to provide the perfect base for decorative concrete and terrazzo finishes.

Flooring Preparation Product Selection Matrix

FLOOR PATCH REPAIR			PRIMERS		
Feather Edge	Floor Patch Pro	Vinyl Concrete Patch	Level Set Primer Plus	Level Set Epoxy Primer	Level Set Primer
A trowelable, rapid setting, polymer-modified, cement-based patch and skim coating compound. Ideal for use under resilient flooring and VCT.	A fast-setting, easy-to-mix, portland cement-based patch and skim coating compound for use under ceramic tile, hardwood flooring, carpet and a wide array of other floor coverings.	A fast-setting, one-component, polymer-modified, calcium aluminate, cement-based, horizontal concrete patching compound.	Highly concentrated film-forming dispersion for priming very dense, smooth, non-absorbent substrates such as terrazzo, marble, metal decking, ceramic and quarry tile.	A 100% solids, two-component, solvent-free epoxy primer designed for use with Level Set Underlayments and Wear Topping. It is specifically formulated for tenacious bond strength to minimize cracking and for sand broadcast applications.	Liquid, polymer-latex bonding agent for interior applications of Level Set products and ProSpec concrete repair products.
 	 				

INTERIOR / EXTERIOR	Interior	Interior	Interior / Exterior	Interior	Interior / Exterior	Interior / Exterior
---------------------	----------	----------	---------------------	----------	---------------------	---------------------

Substrates:

Ceramic tile	■	■ ¹		■	■	
Concrete	■	■	■	■	■	■
Cutback adhesive residue	■ ¹	■ ¹		■		
Solid wood floors	■	■		■	■	
Terrazzo	■	■		■	■	
Embossing leveler	■ ^{1, 2}	■				
Moisture mitigation	■ ¹	■ ¹		■	■	

Placement:

Thickness	Featheredge to 1/2" (13 mm)	Featheredge to 2" (51 mm)	1/16" up to 2" * (2 mm up to 51 mm)	N/A	N/A	N/A
Working time @ 70° F	15 to 25 minutes	8 to 15 minutes	20 minutes	N/A	N/A	N/A
Application	Trowel	Trowel	Trowel	Roller or brush	Squeegee or roller	Brush

Floor Covering Acceptance:

Tile & stone installation	15 to 30 minutes	15 to 30 minutes	3 to 4 hours	N/A	N/A	N/A
Moisture-sensitive floor coverings	15 to 30 minutes	15 to 30 minutes	N/A	N/A	N/A	N/A

Compressive Strength (PSI):

28 days	>4,700 (31 MPa)	>4,000 (27.6 MPa)	>5,500 (40 MPa)	N/A	N/A	N/A
---------	-----------------	-------------------	-----------------	-----	-----	-----

Qualifying System Warranty:

Warranty length ⁵	Limited Lifetime	Limited Lifetime	20-Year	Limited Lifetime	Limited Lifetime	Limited Lifetime
------------------------------	------------------	------------------	---------	------------------	------------------	------------------

- When mixed with ProSpec B-730 Mortar / Acrylic Additive.
- Allow to dry 70 to 90 minutes when using as an embossing leveler.
- Requires 3.4 lb metal lath.

- Thickness varies based on desired moisture vapor reduction.
- Contact ProSpec Technical Services for full warranty details at 1-800-334-0784. Limited Lifetime is defined as 30 years and is available when used as part of tile system warranty.

- * Vinyl Concrete Patch applications from 1 qt. of water with 1 qt. of ProSpec B-7
 ** Project specific warranty available – Co

MOISTURE MITIGATION	SELF-LEVELING UNDERLAYMENTS			LIGHTWEIGHT SELF-LEVELING UNDERLAYMENT	DEEP POUR UNDERLAYMENT	WEAR TOPPING	RESURFACER
Moisture Guard Max	Level Set 300	Level Set 200	Level Set 100	Level Set LW-60	Level Set Deep Pour 3	Level Set Wear Topping	Concrete Resurfacer
One-coat, easy to use, moisture vapor reduction coating. Reduces 25 lbs. of moisture vapor transmission to less than 3 lbs. and is effective on concrete with up to 100% RH and up to pH14.	High-performance, fiber-reinforced, self-leveling underlayment that is formulated for maximum flow and seamless merging with every pour. Ideal for fast track applications.	Calcium aluminate-based, self-leveling underlayment used to level and smooth floors.	Polymer-modified, portland cement-based self-leveling underlayment.	A lightweight, self-leveling underlayment that is half the weight of traditional cement and gypsum-based systems. Ideal when load bearing restrictions apply.	A calcium aluminate cement-based, self-leveling underlayment used to level and smooth floors up to 3" (76 mm) in one lift. Ideal for large, thick-build applications.	A premium, calcium aluminate cement-based, high strength topping designed for use in light manufacturing, malls, retail stores, warehouses and lobbies where a hard, flat, smooth surface is desired.	Polymer-modified, cement-based resurfacer designed to make concrete look new again.
Interior	Interior	Interior	Interior	Interior	Interior	Interior	Interior / Exterior
	■	■	■	■	■	■	
■	■	■	■	■	■	■	■
	■	■	■	■	■		
	■ ³	■ ³	■ ³	■ ³			
	■	■	■	■	■	■	
	■			■		■	
Varies ⁴	1/8" up to 2" (3 mm up to 51 mm) neat; 5" (127 mm) extended	1/8" up to 2" (3 mm up to 51 mm) neat; 5" (127 mm) extended	1/8" up to 1" (3 mm up to 25 mm) neat	1/4" up to 2" (6 mm up to 51 mm) neat	3/8" up to 3" (10 mm up to 76 mm) neat	1/4" up to 2" (6 mm up to 51 mm) neat	Up to 1/2" (13 mm)
N/A	25 to 35 minutes	25 to 35 minutes	25 to 35 minutes	25 to 35 minutes	25 to 35 minutes	25 to 35 minutes	20 to 30 minutes
Squeegee	Pump or pour	Pump or pour	Pump or pour	Pump or pour	Pump or pour	Pump or pour	Squeegee or flat trowel
N/A	3 to 4 hours	4 hours	24 hours	4 hours	3 to 4 hours	N/A	N/A
N/A	16 to 24 hours	16 to 24 hours	72 hours	16 to 24 hours	36 to 48 hours	N/A	N/A
N/A	>5,500 (37.9 MPa)	>5,000 (34.5 MPa)	>5,000 (34.5 MPa)	>4,000 (27.6 MPa)	>3,500 (24.1 MPa)	>6,000 (41.4 MPa)	5,000 (34.5 MPa)
15-Year	15-Year	10-Year	5-Year	15-Year	5-Year	**	

1/16" to 1/4" (2 mm to 6 mm) require the replacement of 30 Mortar / Acrylic Additive.
 Contact ProSpec Technical Services.

NOTE: All ProSpec Level Set products require the use of ProSpec Level Set Primer or ProSpec Level Set Primer Plus. Installations also require proper surface preparation that include the removal of all unsound concrete, grease, oil, paint and any other foreign materials that will inhibit performance. A CSP profile of 3 to 5 is recommended. Patch or repair deep areas, holes or cracks with a patching product prior to the installation of any ProSpec Level Set product.

Self-Leveling Underlayments



Level Set 300

A high-performance, calcium aluminate-based, fiber-reinforced, self-leveling underlayment that provides a flat, extremely smooth, durable surface for finished flooring installation. Ideal for fast track applications.

Installs Where:

- Interior
- Floors

Features:

- Formulated for maximum flow
- Seamless merging with every pour
- Applications from 1/8" to 2" (3 mm to 51 mm) neat and can be featheredged to adjoining elevations
- Can be extended up to 5" (127 mm)
- Walkable in 3 to 4 hours
- Accepts non-moisture sensitive tile and stone in 3 to 4 hours
- Lower alkaline binder system, when installed at $\geq 3/16"$ (5 mm), reduces the potential for decomposition of alkali sensitive adhesives and coatings compared to installations over concrete*



Product #	Packaging
65550012	50 lb (22.7 kg) bag



Level Set 200

A calcium aluminate-based, self-leveling underlayment used to level and smooth floors for finished floor covering installation. Designed for the fast leveling of floors.

Installs Where:

- Interior
- Floors

Features:

- Applications from 1/8" to 2" (3 mm to 51 mm) neat and up to 5" (127 mm) extended
- Walkable in 3 to 4 hours
- Accepts non-moisture sensitive tile and stone in 4 hours



Product #	Packaging
65550004	50 lb (22.7 kg) bag



Level Set 100

A portland cement-based, self-leveling underlayment used to level and smooth floors for finished floor covering installation.

Installs Where:

- Interior
- Floors

Features:

- Applications from 1/8" to 1" (3 mm to 25 mm) neat
- Portland cement-based
- Provides a smooth surface
- Accepts tile and stone installations in 24 hours



Product #	Packaging
65550006	50 lb (22.7 kg) bag



Level Set Deep Pour 3

A calcium aluminate cement-based, self-leveling underlayment that provides a flat, smooth, durable surface up to 3" (76 mm) in one lift. Ideal for thick-build applications.

Installs Where:

- Interior
- Floors

Features:

- Applications from 3/8" to 3" (10 mm to 76 mm) neat
- Walkable in 3 to 4 hours
- Accepts non-moisture sensitive tile and stone in 4 hours

Product #	Packaging
65555002	50 lb (22.7 kg) bag

* Based on independent industry reports available upon request.

Self-Leveling Surface Toppings



Level Set LW-60

A lightweight, self-leveling underlayment that provides a flat, smooth, durable surface at 50% of the weight of a conventional portland cement or gypsum-based underlayment. Ideal when load bearing restrictions apply.

Installs Where:

- Interior
- Floors

Features:

- Applications from 1/4" to 2" (6 mm to 51 mm) neat and can be featheredged to adjoining elevations
- Half the weight of traditional cement and gypsum based systems
- Approximately same coverage as 50 lb bag
- Walkable in 3 to 4 hours
- Accepts non-moisture sensitive tile and stone in 4 hours



Level Set Wear Topping

A premium, calcium aluminate cement-based, high strength topping designed for use in light manufacturing, malls, retail stores, warehouses and lobbies where a hard, flat, smooth surface is desired.

Installs Where:

- Interior
- Floors

Features:

- Single lift applications from 1/4" to 2" (6 mm to 51 mm) neat; can be extended to 5" (127 mm)
- Accepts foot traffic in 2 to 3 hours and rubber wheel traffic within 48 hours
- Accepts stains, sealers and coatings within 24 hours
- Ultra-smooth, cured surface
- Available in three colors – gray, white and bright white



Product #	Packaging
65550018	25 lb (11.3 kg) bag



Product #	Packaging
65550024	Gray, 50 lb (22.7 kg) bag
65550005	White, 50 lb (22.7 kg) bag
65550008	Bright white, 50 lb (22.7 kg) bag

Primers & Bonding Agent



Level Set Epoxy Primer

A 100% solids, two-component, solvent-free epoxy primer designed for use with Level Set Underlayments and Wear Topping. It is specifically formulated for extreme bond strength to minimize cracking and for sand broadcast applications.

Installs Where:

- Interior / Exterior

Features:

- Tenacious bonds to non-porous substrates
- Easy spread formula with good workability
- Low odor for confined space use
- Designed for sand broadcast applications
- For use when polishing Level Set Wear Topping and for best resistance to cracking
- Cures in 4 to 6 hours

Product #	Packaging
65510324	2 gal kit Part A: 1 gal (3.8 L) Part B: 1 gal (3.8 L)



Level Set Primer Plus

A highly concentrated, film forming dispersion for priming very dense, smooth, nonabsorbent substrates such as terrazzo, marble, metal decking, ceramic and quarry tile.

Installs Where:

- Interior / Floors Only

Features:

- Provides maximum adhesion and seal between the substrate and the underlayment of topping
- Dries in 1 to 3 hours
- Alternative to 2-part epoxy primers
- Water-based; non-flammable
- VOC Compliant

Product #	Packaging
65510026	2.64 gal (10 L) jug



Level Set Primer

A liquid-polymer, latex bonding agent for applications of the Level Set self-leveling products and ProSpec concrete repair products. All Level Set products must be used in conjunction with a Level Set Primer.

Installs Where:

- Interior / Exterior

Features:

- Bonding agent
- Dries in 1 to 3 hours
- Water-based; non-flammable
- VOC Compliant
- Concentrated re-emulsifiable adhesive

Product #	Packaging
65510020	1 gal (3.8 L) jug 4 per case (38 lbs (17 kg))
65510021	5 gal (18.9 L) pail (48 lbs (22 kg))



B-730 Mortar / Acrylic Additive

An acrylic polymer emulsion used as an admixture in portland cement-based products including; masonry and concrete repair products and cement-based grouts and ProSpec non-modified tile setting mortars. It improves workability and flexibility, extends open time, and increases adhesion, bond and impact strength and freeze / thaw resistance.

Installs Where:

- Interior / Exterior

Features:

- Increases tensile strength
- Solvent free / VOC compliant
- Improves workability and curing
- Enhances adhesion and durability
- Reduces potential for efflorescence

Specifications:

- ANSI A118.4 and A118.11 C2ES1P1 performance per ISO 13007 when mixed with ProSpec PermaSet 200 or ProSpec PermaSet 275

Product #	Packaging
65460020	1 gal (3.8 L) jug
6540021	5 gal (19.0 L) pail
65460022	55 gal (208 L) drum

Moisture Mitigation



Moisture Guard Max

A one-coat, 100% solids, surface penetrating, film-forming epoxy coating for remediating the moisture vapor transmission related to green and damp concrete surfaces. Specifically designed to cure and adhere to concrete under extreme conditions of constant moisture transmission, high pH and high relative humidity. Reduces the levels of water vapor transmission below the recommended moisture vapor transmission for most adhesives, coatings and floor coverings.

Installs Where:

- On-grade, above-grade or below-grade concrete substrates

Features:

- Apply to concrete with a relative humidity (RH) up to and including 100%
- Reduces 25 lbs. of moisture vapor transmission to less than 3 lbs.
- Alkali resistant to a pH14
- Low VOC
- Low viscosity mix ensures maximum penetration of the concrete substrate to fill in pores and voids
- Easy mix formula – 2 parts A (blue) to 1 part B (yellow) by volume = (green)
- Non-flammable
- Part of a 15-Year system warranty

Product #	Packaging
65510019	3 gal kit: Part A: 2 gal (7.6 L) - Translucent blue liquid in a plastic container. Part B: 1 gal (3.8 L) - Translucent yellow liquid in a plastic container.



Patching & Skimcoating

Resurfacing & Rehabilitation



Feather Edge

A trowelable, rapid setting, polymer-modified, cement-based patch and skim coating compound that results in an ultra-smooth, thin finish applied under resilient flooring, VCT and a wide array of floor coverings.

Installs Where:

- Interior
- Horizontal

Features:

- Featheredge to 1/2" (13 mm) thickness without cracking
- Accepts tile and stone installations and moisture-sensitive floor coverings in 15 to 30 minutes
- No large aggregate, resulting in ultra-smooth, thin finish that can be sanded if necessary
- Exceptional bond strength



Product #	Packaging
65550000	10 lb (4.5 kg) bag (4/cs)



Floor Patch Pro

A fast setting, easy-to-mix, portland cement-based patch and skim coating compound for use under ceramic tile, hardwood flooring, carpet and a wide array of floor coverings.

Installs Where:

- Interior
- Horizontal

Features:

- Featheredge to 2" (51 mm) in thickness
- Initial set in 15 minutes
- Can accept tile and stone applications as well as moisture sensitive floor coverings in as little as 30 minutes
- Can be applied to concrete with a relative humidity (RH) up to 90%
- Low dust when sanded



Product #	Packaging
60201111	25 lb (22.7 kg) bag



Concrete Resurfacer

A polymer-modified, cement-based product used for resurfacing old concrete to make it look new again.

Installs Where:

- Interior / Exterior
- Horizontal

Features:

- Excellent bond to old concrete from featheredge to 1/2" (13 mm)
- Fast drying, walkable in 2 hours
- Freeze / thaw resistant
- Self curing
- Contains corrosion inhibitor
- Can be pigmented
- High flexural and compressive strength
- Apply using a steel trowel, squeegee, masonry brush for curbs or steps and broom finish



Product #	Packaging
65510461	Gray: 50 lb (22.7 kg) bag



Vinyl Concrete Patch

A fast-setting, one-component, polymer-modified, calcium aluminate, cement-based, horizontal concrete patching compound.

Installs Where:

- Interior / Exterior
- Horizontal

Features:

- Can be applied from 1/16" to 2" (2 mm to 51 mm) neat
- Ready for pedestrian traffic in 8 to 12 hours
- Ready for vehicle traffic in 48 hours
- Excellent abrasion resistance
- Excellent resistance to deicing salts
- Shrinkage compensating

Specifications:

- Exceeds ASTM C928 for High Strength Mortar

* Vinyl Concrete Patch applications from 1/16" to 1/4" (2 mm to 6 mm) require the replacement of 1 qt. water with 1 qt. of ProSpec B-730 Mortar / Acrylic Additive.



PROSPEC®

Flooring Preparation Systems



ProSpec®, Level Set®, Micro Defense®, and RCT® are registered trademarks; and EST™ is a trademark of Bonsal American, Inc., an Oldcastle company.

Bonsal American • 8201 Arrowridge Blvd. • Charlotte, NC 28273
Phone: 1.800.334.0784 • prospec.com

REV 02/13