



# THIN SET MORTARS



Most of the Bostik ThinSets listed contain Bostik's Blockade™ Antimicrobial agent which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive; the dried resists stains caused by mold.



#### **TILE TYPES**

- A Non-Vitreous
- **B** Semi-Vitreous
- C Vitreous
- Impervious/Porcelain
- White Translucent Marbles
- F Granite, Stable Stones, Slate

# Moisture Sensitive

- Stone (i.e. Russo LeVanto and Nero Marquina Marble or Green Marble and their Agglomerate
- Marble and their Agglomerates)

  Large Ceramic tile,
- Stable Stone & Granite
  Resin Backed Stone
- nesiii backeu stoi
- J Glass Tiles

#### **SUBSTRATES**

- 1 Plywood
- 2 Concrete
  - Concrete
- 3 Gypsum Wallboard
  4 Cementitious Backer
- Units
  Properly Prepared
  Ceramic Tile
- 6 Properly Prepared Vinyl/VCT Tile

**Cutback Residue** 

(interior-dry only)

Clean Steel

#### PORCELAIN-MATE™

- Extremely durable
- Single component latex modified
- Exceeds ANSI A118.4
- For all tile absorption rates
- For interior and exterior applications
- Single component latex modified
- Excellent for porcelain tiles
- Excellent working characteristics

## ABCDEFH24

#### **BOSTIK PM™**

- Extremely flexible
- Extremely durable
- Economical
- Single component latex modified (water-add only)
- Exceeds ANSI A118.4 & A118.11 Requirements
- For all tile absorption rates
- For interior and exterior applications
- For vertical and horizontal applications

# **ABCOEFH1234567**

#### **SINGLE-FLEX®**

- Extremely flexible
- Extremely durable
- Long open time, resist skinning
- Single component latex modified (water-add only)
- Exceeds ANSI A118.4 & A118.11 Requirements
- For all tile absorption rates
- For interior and exterior applications
- For vertical and horizontal applications

# ABCDEFH1234567

#### **BIG TILE & STONE™**

- Extremely durable
- Extremely tacky consistency
- Single component latex modified (water-add only)
- For all tile absorption rates
- Exceeds ANSI A118.4 & A118.11 Requirements
- For interior and exterior applications
- Excellent for porcelain tiles
- Excellent where a setting bed of 1/8" 3/4" is required

# ABCDEFH1234567



#### **DITRA-SET™**

- Extremely durable
- Premium thin set
- Exceeds ANSI A118.1, and A118.4 & A118.11 when mixed with 425 Multi-Purpose Acrylic Latex Admixture
- For interior and exterior applications
- For residential and heavy commercial applications

### ABCDEFH123456

# TILE-MATE® PREMIUM TILE-MATE® FLOOR & WALL

- Extremely durable
- Exceeds ANSI A118.1 when mixed w/water, and A118.4 & A118.11 when mixed with 447 Flex-A-Lastic.
- For all tile absorption rates
- For interior and exterior applications
- For residential and heavy commercial applications

#### ABCDEFH1234567

#### **STONEWALL<sup>TM</sup>**

- Excellent on walls as well as floors
- Exceeds all industry specifications for strengths and performances
- Use on floors in extra heavy applications
- Up to 10X better strengths as lite mortars
- Excellent for thin-bed and medium-bed applications

# ABCDEFHJ1234567

#### **REFLEX®**


- Extremely flexible (Deflection up to L/240)
- Extremely tacky consistency
- Excellent for glass tile
- Extremely durable
- Best performance for resin backed stone
- Single component latex modified (water-add only)
- Exceeds ANSI A118.4 & A118.11 requirements
- For all tile absorption rates
- For interior, exterior, vertical and horizontal applications

# **ABCDEFHUU1234567**

#### SINGLE-FLEX® F.S.™

- Set and grout in same day
- Extremely flexible
- Extremely durable
- Single component latex modified
- Exceeds ANSI A118.4 & A118.11 Requirements
- For interior and exterior applications
- For vertical and horizontal applications
- Excellent for commercial installations with limited down time

# ABCDEFH1234567

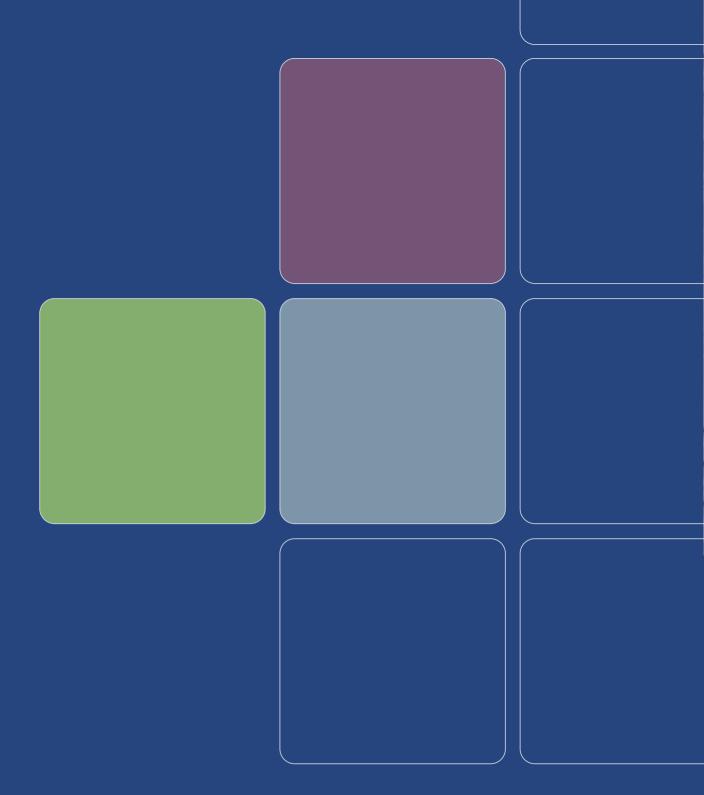

BOSTIK, INC.
CONSUMER & CONSTRUCTION DIVISION
11320 W. Watertown Plank Road | Wauwatosa, WI 53226
P: 1-800-726-7845 | F: 414-774-8075
E: contactus@bostik-us.com

www.bostik-us.com

T66 10-05-12

