

CertainTeed

Commercial Roof Systems

2012 Selection Guide



CertainTeed
SAINT-GOBAIN

make the right choice

Experts in residential and commercial roofing

CertainTeed is a leading manufacturer of commercial and residential roofing products and is a division of Saint-Gobain, the world's largest manufacturer of building materials. Saint-Gobain ranks among the world's top 100 industrial corporations, operating through a global network of more than 600 companies in more than 64 countries.

A quality roof depends on two essential elements: excellent materials and superior workmanship. CertainTeed has been one of North America's leading roofing material manufacturers for over 100 years.

Innovative solutions



CertainTeed leads the way in smart, energy-saving products that help you meet new building standards. For instance, our CoolStar™ products with solar-reflective surfaces meet ENERGY STAR® and initial California Title 24 requirements, and offer several installation advantages.

Workmanship is key

To help assure the best possible workmanship for your commercial roof installation, CertainTeed has established the Gold and Silver Star Contractor programs. These programs offer the building owner a selection of highly credentialed roofing contractors who have met the strictest criteria relating to financial credibility, workmanship history and sound business practices, including proper licenses and appropriate insurance.



Outstanding warranty options

Only CertainTeed Gold and Silver Star Contractors are eligible to apply for CertainTeed's NDL (No Dollar Limit), Full System NDL and Integrity Coverage (IC) warranties on specific roof projects.

The three levels of IC warranties (see box below) are only available through CertainTeed Gold Star Contractors. Owners and specifiers who choose an IC option have the added security of manufacturer involvement in the maintenance and upkeep of each roofing system to maximize the life expectancy of the roof.

Contact CertainTeed for complete warranty and maintenance plan details, including limitations and costs.

Program Elements	Integrity NDL (GOOD)	Integrity Assurance (BETTER)	Integrity Maintenance (BEST)
Premium Details	✓	✓	✓
Premium System Specification	✓	✓	✓
25-year NDL Warranty	✓	✓	✓
Inspections	N/A	Annual	Semi-Annual
Maintenance	N/A	N/A	Semi-Annual
Non-CertainTeed Roof Component Coverage	N/A	N/A	✓
Post-Storm Emergency Response	N/A	N/A	✓
Owner Requirements	Proof of Maintenance; Notification of Alterations	Proof of Maintenance; Notification of Alterations	Notification of Alterations

the quality difference

BUR (Built-Up Roofing)

Traditional built-up roofing (BUR) derives its name from the building of a roof on-site using layers of base sheet, interply sheets and cap sheet or other surfacing such as gravel or liquid coating. Hot asphalt (bitumen) is the bonding and waterproofing agent between layers. BUR is suitable for most low slope roofing applications. The higher the quality of the BUR materials and asphalt used and the greater the number of plies (and separate asphalt moppings), the more superior the roof system.



APP and SBS modified bitumen

In the 1970s, technological advances in asphalt sciences led to the development of modifiers such as APP (atactic polypropylene) and SBS (styrene-butadiene-styrene) which, when added to unblown (unoxidized) asphalt, impart either plastic (APP) or rubber (SBS) characteristics. These additives provide enhanced performance characteristics to traditional asphalt. When coupled with reinforcements, such as



polyester (superior elongation abilities) or fiber glass (high tensile strength), they create high-performance roof membranes.

APP modified bitumen membranes are self-adhering when heated using a roofing torch. SBS modified bitumen membranes can be formulated for torch application, but are more commonly applied using hot asphalt or cold SBS modified bitumen adhesive. The result is a BUR system with significantly enhanced performance capabilities. Continuing improvements in technology have also resulted in self-adhering SBS roof membranes.

When an SBS or APP cap sheet is combined with traditional BUR base sheets and interply sheets, the result is a hybrid roof offering the best of both systems, multiple plies and superior performance and longevity.

Keep the following factors in mind when selecting or specifying a roof system:

1. Choose the highest possible quality materials from an established manufacturer with an excellent reputation for integrity. CertainTeed has been manufacturing roofing materials for over 100 years.
2. Compare similar products. Evaluate the technical data provided by the manufacturer. Compare the weights, thicknesses and ASTM test results.
3. Remember, the money saved today on a low cost roofing system can be more than offset by the need to reroof sooner as the result of poor performance leading to leakage or premature failure.
4. Consider the manufacturer's warranty. The length of the warranty term (in years) helps gauge the superiority of the system selected. Generally, the longer the warranty, the better the system. Is a guarantee which covers not only the material but also the contractor's workmanship available for the roof system selected?
5. Property value. Is the manufacturer's warranty transferable to a new building owner?
6. How committed is the roofing material manufacturer willing to be? Does the manufacturer, as an option to the owner, have an approved contractor program in place? If an enhanced warranty that includes workmanship is selected, will the manufacturer inspect the roof project? With CertainTeed, the answer to all of these questions is yes.
7. Consider energy costs. Keep in mind that white mineral surfaced cap sheets, light colored gravel surfacing or roofs coated with reflective roof coating will help reduce interior cooling costs. Consider a CertainTeed cap sheet with CoolStar™ reflective granules.
8. Choose a system manufacturer. CertainTeed provides the key elements of the roofing system — insulation, adhesives and coatings, membranes and fasteners.
9. Consider building code requirements. Many local and state governments have specific guidelines for specifying roof systems.

CertaSpec™

CertainTeed's comprehensive online roofing specification tool – allows roofing contractors and specifiers to quickly write accurate steep- and low-slope roofing specifications and create job submittal packages. Once specifications are finalized, the system generates submittal package materials that can be printed, emailed or saved electronically.

Live updates are routinely made, keeping the system current and accurate. Includes updated LEED® documentation and technical product information.



- Produce professional and complete job submittal packages in less than 10 minutes.
- Quickly identify roofing products and systems to fit your job.
- Review commercial construction details and export them into the drawing format of your choice.
- Identify “green” values such as solar reflectance or recycled content for products to be used in your project.
- Produce LEED® letters customized for your project.

BUR (Built-Up Roofing)

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS				
		Application Method*	Thickness (Typical)	Weight per Roll	Coverage per Roll	ASTM Reference
Base Sheets						
Glasbase™ Base Sheet	Standard fiber glass base sheet	MF, HA, CA	1.0mm (40mils)	75 lbs.	300 sq. ft.	D4601, Type II, UL Type G2
Yosemite® Venting Base Sheet	Heavy duty fiber glass base sheet with embossed channels for venting moisture; ideal for recover applications	MF, HA	2.8mm (110mils)	85 lbs.	100 sq. ft.	D3909, D4897, Type II, UL Type G3
Interply Sheets						
Flintglas® Type IV Ply Sheet	Standard fiber glass ply sheet	HA, CA	0.6mm (24mils)	38 lbs.	500 sq. ft.	D2178, Type IV, UL Type G1
Flintglas® Type VI Premium Ply Sheet	Heavier, premium fiber glass ply sheet	HA, CA	0.8mm (32mils)	40 lbs.	500 sq. ft.	D2178, Type VI, UL Type G1
Cap Sheets						
Flintglas® Mineral Cap Sheet	Fiber glass cap sheet for use over organic or fiber glass base and interply combinations	HA, CA	3.0mm (120mils)	78 lbs.	100 sq. ft.	D3909, UL Type G3
Flintglas® Cap Sheet CoolStar™	Mineral surfaced fiber glass cap sheet with reflective CoolStar™ granules	HA, CA	3.0mm (120mils)	80 lbs.	100 sq. ft.	D3909

*Application Methods: MF = Mechanically Fastened / HA = Hot Asphalt / CA = Cold Asphalt / TA = Torch Applied / SA = Self-Adhering

APP Modified Bitumen

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS				
Base/Interply Sheets		Application Method*	Thickness (Typical)	Weight per Roll	Coverage per Roll	ASTM Reference
Flintlastic® APP Base T	Smooth surfaced fiber glass, reinforced APP	TA	2.0mm (80mils)	100 lbs.	200 sq. ft.	D6509
Flintlastic® STA	Standard smooth surfaced polyester APP; first ply in 2-ply systems or as cap with suitable coating	TA	4.0mm (160mils)	87 lbs.	100 sq. ft.	D6222, Grade S, Type I
Flintlastic® STA Plus	Premium, thicker, smooth surfaced polyester APP; first ply in 2-ply systems or as cap with suitable coating	TA	4.5mm (180mils)	100 lbs.	100 sq. ft.	D6222, Grade S, Type I
Cap Sheets						
Flintlastic® STA	Premium, thicker, smooth surfaced polyester APP; first ply in 2-ply systems or as cap with suitable coating	TA	4.0mm (160mils)	87 lbs.	100 sq. ft.	D6222, Grade S, Type I
Flintlastic® STA Plus	Premium, thicker, smooth surfaced polyester APP; first ply in 2-ply systems or as cap with suitable coating	TA	4.5mm (180mils)	100 lbs.	100 sq. ft.	D6222, Grade S, Type I
Flintlastic® GTA	Standard polyester mineral surfaced APP cap sheet	TA	4.2mm (168mils)	105 lbs.	100 sq. ft.	D6222, Grade G, Type I
Flintlastic® GTA CoolStar™	Standard polyester mineral surfaced APP cap sheet with reflective CoolStar™ granules	TA	4.2mm (168mils)	106 lbs.	100 sq. ft.	D6222, Grade G, Type I
Flintlastic® GTA-FR	Polyester mineral surfaced APP cap sheet with fire retardant additives	TA	4.2mm (168mils)	105 lbs.	100 sq. ft.	D6222, Grade G, Type I
Flintlastic® GTA-FR CoolStar™	Polyester mineral surfaced APP cap sheet with fire retardant additives and reflective CoolStar™ granules	TA	4.2mm (168mils)	106 lbs.	100 sq. ft.	D6222, Grade G, Type I

SBS Modified Bitumen

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS				
Base and Interply Sheets		Application Method*	Thickness (Typical)	Weight per Roll	Coverage per Roll	ASTM Reference
Flexiglas™ Base Sheet	SBS modified, fiber glass base sheet	HA, CA, MF	1.2mm (48mils)	90 lbs.	300 sq. ft.	D4601, Type II
Flintlastic® Base 20	Premium fire resistant, SBS modified fiber glass base sheet	HA, CA, MF	2.3mm (92mils)	90 lbs.	150 sq. ft.	D4601, Type II, D6163, Grade S, Type I
Flintlastic® Base 20 T	Premium fire resistant, SBS modified bitumen, coated fiber glass base sheet	TA, MF	3.0mm (120mils)	81 lbs.	100 sq. ft.	D4601, Type II, D6163, Grade S, Type I
Flintlastic® Poly SMS™ Base Sheet	SBS modified, polyester base sheet	HA, CA, MF	2.0mm (80mils)	90 lbs.	200 sq. ft.	D4601, Type II
Flintlastic® Ultra Poly SMS™ Base Sheet	Premium heavyweight SBS modified, polyester base sheet	HA, CA, MF	3.7mm (148mils)	90 lbs.	100 sq. ft.	D6164, Grade S, Type I
Black Diamond™ Base Sheet	Self-adhering, SBS modified, fiber glass base sheet (for noncombustible decks) with fine particle surfacing	SA	1.5mm (60mils)	78 lbs.	200 sq. ft.	D1970
All Weather/Empire™ Base Sheet	Heavyweight, SBS modified, fiber glass base sheet, use as tile underlayment	MF, HA, CA	1.8mm (70mils)	70 lbs.	200 sq. ft.	D4601, Type II
Flintlastic® Ultra Glass SA	Self-adhering, SBS modified; heavy duty, fiber glass base sheet	SA	3.0mm (120mils)	73 lbs.	100 sq. ft.	D6163, Grade S, Type I, D1970

*Application Methods: MF = Mechanically Fastened / HA = Hot Asphalt / CA = Cold Asphalt / TA = Torch Applied / SA = Self-Adhering

SBS Modified Bitumen

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS				
Cap Sheets		Application Method*	Thickness (Typical)	Weight per Roll	Coverage per Roll	ASTM Reference
Flintlastic® Cap 30	Heavy duty SBS modified, fiber glass mineral surfaced cap sheet	HA, CA	3.5mm (140mils)	87 lbs.	100 sq. ft.	D6163, Grade G, Type I
Flintlastic® Cap 30 CoolStar™	Heavy duty SBS modified, fiber glass with reflective CoolStar™ granules	HA, CA	3.5mm (140mils)	88 lbs.	100 sq. ft.	D6163, Grade G, Type I
Flintlastic® FR Cap 30	Mineral surfaced, fire-resistant, SBS modified bitumen, fiber glass cap sheet	HA, CA	3.5mm (140mils)	87 lbs.	100 sq. ft.	D6163, Grade G, Type I
Flintlastic® FR Cap 30 CoolStar™	Mineral surfaced, fire resistant, SBS modified bitumen, fiber glass cap sheet with reflective CoolStar™ granules	HA, CA	3.5mm (140mils)	88 lbs.	100 sq. ft.	D6163, Grade G, Type I
Flintlastic® FR Cap 30 T	Mineral surfaced, fire-resistant, SBS modified bitumen, fiber glass cap sheet	TA	4.0mm (140mils)	100 lbs.	100 sq. ft.	D6163, Grade G, Type I
Flintlastic® FR Cap 30 T CoolStar™	Mineral surfaced, fire-resistant, SBS modified bitumen, fiber glass cap sheet with reflective CoolStar™ granules	TA	4.0mm (160mils)	102 lbs.	100 sq. ft.	D6163, Grade G, Type I
Flintlastic® FR-P	Fire-resistant, SBS modified, polyester, mineral surfaced cap sheet	HA, CA	4.2mm (168mils)	101 lbs.	100 sq. ft.	D6164, Grade G, Type I
Flintlastic® FR-P CoolStar™	Fire-resistant, SBS modified, polyester, mineral surfaced cap sheet with reflective CoolStar™ granules	HA, CA	4.2mm (168mils)	103 lbs.	100 sq. ft.	D6164, Grade G, Type I
Flintlastic® Premium FR-P	Premium, fire-resistant, SBS modified, heavyweight polyester mineral surfaced cap sheet	HA, CA	4.2mm (168mils)	101 lbs.	100 sq. ft.	D6164, Grade G, Type II
Flintlastic® Premium FR-P CoolStar™	Premium, fire-resistant, SBS modified, heavyweight polyester mineral surfaced cap sheet with reflective CoolStar™ granules	HA, CA	4.2mm (168mils)	103 lbs.	100 sq. ft.	D6164, Grade G, Type II
Flintlastic® GMS	Mineral surfaced, SBS modified, polyester cap sheet	HA, CA	4.0mm (160mils)	94 lbs.	100 sq. ft.	D6164, Grade G, Type I
Flintlastic® GMS CoolStar™	Mineral surfaced, SBS modified, polyester cap sheet with reflective CoolStar granules	HA, CA	4.0mm (160mils)	97 lbs.	100 sq. ft.	D6164, Grade G, Type I
Flintlastic® Premium GMS	Premium, SBS modified, heavyweight polyester mineral surfaced cap sheet	HA, CA	4.2mm (168mils)	101 lbs.	100 sq. ft.	D6164, Grade G, Type II
Flintlastic® Premium GMS CoolStar™	Premium, SBS modified, heavyweight polyester mineral surfaced cap sheet with reflective CoolStar™ granules	HA, CA	4.2mm (168mils)	103 lbs.	100 sq. ft.	D6164, Grade G, Type II
Flintlastic® GTS-FR	Fire-resistant, SBS modified, heavyweight polyester mineral surfaced cap sheet	TA	4.5mm (180mils)	90 lbs.	75 sq. ft.	D6164, Grade G, Type II
Flintlastic® GTS-FR CoolStar™	Fire-resistant, Premium, SBS modified, heavyweight polyester mineral surfaced cap sheet with reflective CoolStar™ granules	TA	4.5mm (180mils)	92 lbs.	75 sq. ft.	D6164, Grade G, Type II
Flintlastic® GTS	SBS modified, heavyweight polyester mineral surfaced cap sheet	TA	4.5mm (180mils)	90 lbs.	75 sq. ft.	D6164, Grade G, Type II
Flintlastic® GTS CoolStar™	Premium, SBS modified, heavyweight polyester mineral surfaced cap sheet with reflective CoolStar™ granules	TA	4.5mm (180mils)	92 lbs.	75 sq. ft.	D6164, Grade G, Type II
FlintClad™	Premium, SBS modified, polyester cap sheet with foil facing	TA	4.0mm (160mils)	95 lbs.	100 sq. ft.	D6298

innovative products

FLINTLASTIC® SA

Self-Adhering SBS Modified Bitumen Roofing System

CertainTeed Flintlastic® SA is a premium, self-adhering SBS modified bitumen roofing system comprising a nailable base or self-adhering ply base with a top surface designed to accept self-adhering membrane, a self-adhering mid ply and a self-adhering cap sheet. The Flintlastic SA product line is manufactured with premium quality materials, and the roof system specifications have been engineered to provide roofs that offer excellent longevity and performance.

The complete Flintlastic SA roofing system offers a number of advantages:

- Ease of application
- No hot asphalt or torches needed for installation
- Minimal equipment requirements
- Cleaner work environment

In addition, Flintlastic SA Cap Sheet is available in a variety of colors that complement the most popular CertainTeed shingle colors, for use on carports, porches and other residential low slope applications.

Flintlastic SA products can be used in various system configurations, depending on the roof requirements. For small projects, such as decks, additions and porches, two-ply systems with Flintlastic SA NailBase or Flintlastic SA PlyBase, and Flintlastic SA Cap Sheet may be appropriate. For larger roofs and commercial applications, three-ply systems consisting of Flintlastic SA NailBase or Flintlastic SA PlyBase covered with Flintlastic SA Mid Ply and Flintlastic SA Cap Sheet are recommended. Roofs and decks must have proper drainage. Refer to the CertainTeed Commercial Roof Systems Manual for product data sheets and complete specification details. Product application must comply with CertainTeed installation instructions.

Cool Roof Solutions from CertainTeed

White roofs reflect the sun's heat. Black roofs soak it in.

That's the key advantage offered by a brilliant white CoolStar™ roof surface. In fact, reflective roof products lower roof surface temperatures dramatically. With a cooler roof above, much less heat is absorbed into a building's interior. Cooler interiors translate into greater occupant comfort and lower energy-related costs – and reduced demand for air conditioning can even allow a building owner to buy a smaller, less-expensive cooling system.

CertainTeed's advanced roofing granules reflect sunlight to reduce roof temperatures by up to 20%. In addition to saving energy, cooler roofs reduce the "heat island" effect – a cause of smog, impaired water quality and heat-related illnesses.

New and Improved CoolStar

- Granulated, uncoated finish
- Handles like standard product – no special installation requirements
- Low maintenance
- More consistent
- More aesthetically pleasing



Self-Adhering SBS Modified Bitumen

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS				
		Application Method	Thickness (Typical)	Weight per Roll	Coverage per Roll	ASTM Reference
Flintlastic® SA NailBase	SBS modified, fiber glass base sheet (not self-adhering) with a unique permanent top surface film	MF, HA	1.5mm (60mils)	82 lbs.	200 sq. ft.	D4601, Type II
Flintlastic® SA PlyBase	Self-adhering, SBS modified, fiber glass base sheet with a unique permanent top surface film	SA	1.5mm (60mils)	86 lbs.	200 sq. ft.	D4601, Type II, D1970
Flintlastic® SA Mid Ply	Self-adhering, SBS modified, polyester/fiber glass scrim combination mat reinforced, base sheet with a unique permanent top surface film	SA	3.0mm (120mils)	64 lbs.	100 sq. ft.	D6164, Grade S, Type I
Flintlastic® SA Cap	Self-adhering, SBS modified, polyester/fiber glass scrim combination mat reinforced, cap sheet with mineral surfaced cap sheet	SA	4.0mm (160mils)	95 lbs.	100 sq. ft.	D6164, Grade G, Type I
Flintlastic® SA Cap CoolStar™	Self-adhering, SBS modified, polyester/fiber glass scrim combination mat reinforced, cap sheet with reflective CoolStar granules	SA	4.0mm (160mils)	98 lbs.	100 sq. ft.	D6164
Flintlastic® SA Cap FR	Self-adhering, fire-resistant, SBS modified, fiber glass mat reinforced, mineral surfaced cap sheet	SA	3.2mm (125mils)	88 lbs.	100 sq. ft. Type I	D6163, Grade G, Type I, UL 2218 Class 4 D7530
Flintlastic® SA Cap FR CoolStar™	Self-adhering, fire-resistant, SBS modified, fiber glass mat reinforced, mineral surfaced cap sheet with reflective CoolStar granules	SA	3.2mm (125mils)	90 lbs.	100 sq. ft.	D6163, Grade G, Type I, UL 2218, Class 4, IR D7530

*Application Methods: MF = Mechanically Fastened / HA = Hot Asphalt / CA = Cold Asphalt / TA = Torch Applied / SA = Self-Adhering



Roofing Insulation and Coverboards

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS
FlintBoard™ ISO	Features a closed-cell polyiso core laminated to heavy, black (non-asphaltic), fiber-reinforced felt facers	ASTM C1289, Type II
FlintBoard™ ISO-T	Features a tapered design to promote positive drainage	ASTM C1289, Type II
FlintBoard™ ISO Cold	Featuring a heavy duty facer designed specifically for single ply, COLD applied hybrid BUR and SBS modified bitumen roof systems	ASTM C1289, Type II
FlintBoard™ ISO-T Cold	Featuring a heavy duty facer and a tapered design to promote positive drainage	ASTM C1289, Type II
FlintBoard™ ISO Plus	Composite roof insulation with foam core laminated to 1/2" perlite with a fiber-reinforced felt facer	ASTM C1289, Type II or Type III
FlintBoard™ ISO-T Plus	Composite roof insulation with a tapered design to promote positive drainage	ASTM C1289, Type II or Type III
FlintBoard™ ISO WF	Composite roof insulation with foam core laminated to 1/2" high density wood fiberboard	ASTM C1289, Type IV
FlintBoard™ ISO-T WF	Composite roof insulation with a tapered design to promote positive drainage	ASTM C1289, Type IV
FlintBoard™ ISO DD	Composite roof insulation with foam core laminated to 1/4" DensDeck	ASTM C1289, Type VII
FlintBoard™ ISO F	Features a closed-cell polyiso core with tri-laminated foil facers on each side	ASTM C1289, Type I
FlintBoard™ ISO NB	Composite roof insulation with foam core laminated to 7/16" or 5/8" OSB Also available bonded to plywood	ASTM C1289, Type IV
FlintBoard™ CV	Cross-ventilating design specifically for use over sloped unventilated roof decks	ASTM C1289, Type V
FlintBoard™ EPS	Features lightweight, rigid EPSC molded, expanded polystyrene	ASTM C578
FlintBoard™ Pre-Cut Crickets	Pre-packaged in triangular sections only (not the entire cricket), each with a right angle to align with CertainTeed's standard 4' x 4' tapered FlintBoard insulation panels	ASTM C1289, Type II
GlasRoc® Roof Board	High-performance gypsum coverboard combining reinforcing glass mats fully into a specially formulated fire- and moisture-resistant, non-combustible core embedded	ASTM C1177

Fasteners

PRODUCT NAME	DESCRIPTION
FlintFast™ #12	Features sharp drill point and tapered wedge entry; corrosion protection and back-out resistance; available in lengths from 1-5/8" to 8"
FlintFast™ #14	Heavy duty drill point fasteners with tapered wedge entry; low-profile head, deep threads; available in lengths from 1-1/2" to 12"
3" Galvalume Metal Insulation Plates	Concave, reinforced circular design with low profile; designed for outer perimeter strength with recess for screw head
NEW FlintFast™ SIPLD	SIP panel fastener, light duty drill point for corrugated steel deck and wood applications
FlintFast™ TB-75	.075" thick aluminum termination bar; comes with sealant edge
FlintFast™ TB-90	.090" thick aluminum termination bar; no sealant edge

Edge Metal

PRODUCT NAME	DESCRIPTION
FlintEDGE™ Coping	The coping utilizes a metal chair that functions as both a gutter chair with its raised ribs and as an internal splice plate in the same color and finish as the coping cap. Standard 20-gauge galvanized steel cleat. For wall sizes 6" to 32". UL Classified to meet the ANSI/SPRI ES-1 Roof Edge Standard.
FlintEDGE™ Coping+	The coping utilizes a metal chair that functions as both a gutter chair with its raised ribs and as an internal splice plate in the same color and finish as the coping cap. A heavy 16-gauge cleat is available for high wind areas. For wall sizes 6" to 32". UL Classified to meet the ANSI/SPRI ES-1 Roof Edge Standard.
FlintEDGE™ Fascia ET	FlintEdge Fascia ET extruded aluminum retainer features a wide base flange to securely hold down BUR and modified bitumen roofing plies. UL Classified to meet the ANSI/SPRI ES-1 Roof Edge Standard.
FlintEDGE™ Fascia GG	FlintEdge Fascia GG grips the roofing plies without the need for exposed fasteners. Standard face sizes are 6.25", 7.75", 9.25" and 10.75". Custom sizes available upon request. UL Classified to meet the ANSI/SPRI ES-1 Roof Edge Standard.
FlintEDGE™ Fascia GS	FlintEdge Fascia GS is a simple formed gravel stop fascia continuous anchor clip with a concealed splice plate at the joints. Three clip styles to choose from. Standard sizes are from 2.5" to 12".
FlintEDGE™ Gutter	FlintEdge Gutter is custom sized to meet your special requirements. Designed with internal straps for smooth, clean lines and ease of installation. External hangers are optional.
FlintEDGE™ Downspout	FlintEdge Downspouts have a factory offset for concealed joints. Factory fabricated starter tubes are available to help channel water into the downspout. Standard or custom elbows help complete the professional appearance.
FlintEDGE™	FlintEdge Conductor Heads are factory fabricated in the size and shape to meet your unique requirements. Blanks are cut using Conductor Heads computer-controlled equipment for precise, professional appearance.
FlintEDGE™ Scuppers	FlintEdge Scuppers are factory fabricated in the size and shape to meet your unique requirements. Blanks are cut using computer-controlled equipment for precise, professional appearance.
FlintEDGE™ Drain	FlintEdge Drain Through Gravel Stop is custom sized to meet your special requirements. Designed with internal straps for smooth, Through Gravel Stop clean lines and ease of installation. External hangers are optional.
FlintEDGE™ Expansion Joint	<p>FlintEdge Expansion Joint is a multi-part assembly design to facilitate the horizontal and lateral movement of curbs or roof sections.</p> <p>Roof to Roof – CertainTeed's roof-to-roof expansion joint features a snap-on cap for ease of installation and improved aesthetic appearance.</p> <p>Roof to Wall – CertainTeed's roof-to-wall expansion joint features a metal cap for ease of installation and improved aesthetic appearance.</p>
FlintEDGE™ Reglet and Flashing	<p>FlintEdge Concealed Mount Reglet – The surface-mounted wall reglet permits fastener concealment under the continuous snap-on flashing skirt. An attractive and weatherproof counter flashing design.</p> <p>FlintEdge In-Wall Drive-Lock Reglet – Two-piece counter flashing system with surface-mounted reglet/receiver punched for fastening 12" o.c. Snap-on metal skirt flashing can be removed for re-roofing or maintenance</p> <p>FlintEdge Surface Mount Reglet – Standard one-piece design. Sections easily overlap for continuous counter flashing of wall terminated roofing. Fast installation. Pre-punched fastener holes at 12" o.c. Custom sizes available upon request.</p> <p>FlintEdge Snap-on Face Reglet – Continuous wall retainer bar secures roofing to the wall or blocking with fastener holes 12" o.c. Snap-on metal fascia cover conceals fasteners. Attractive clean lines with your choice of 24 standard Kynar 500® colors.</p>

Primers

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS
FlintPrime™	A general purpose, penetration asphalt primer used for the preparation of all types of surfaces prior to application of hot or cold asphalt coatings.	Meets or exceeds ASTM D41, Fed. Spec. SA-A-701, AASHTO M-116, Miami-Dade Approved
FlintPrime™ LV	A superior prime coat, formulated with low-VOC penetrating solvents that promote the adhesion of roofing materials to the roof surface. An ideal base coat before applying asphalt peel-and-stick membranes. Seals masonry, roofing surfaces and metal.	Meets or exceeds ASTM D41, Fed. Spec. SA-A-701, AASHTO M-116, Miami-Dade Approved
FlintPrime™ SA	A water-based polymer modified primer for use with self-adhering modified bitumen roofing membrane systems such as Flintlastic SA. Designed to enhance adhesion of self-adhering modified bitumen membranes.	

Adhesives

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS
FlintBond™	A cold-applied, high-strength SBS polymer modified asphalt adhesive that provides excellent adhesion and elongation properties. Available in brush grade, trowel grade, and caulk grade. Asbestos-free.	Meets or exceeds ASTM D3019 Type III, U.L. Listed, File #R11656, Control #63P6, Miami-Dade Approved

Coatings

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS
FlintCoat™-A PLUS	Single-component, SBS rubber modified asphalt, specially formulated with aluminum pigment to be used as a reflective elastomeric coating with modified bitumen membranes, BUR and primed metal surfaces.	U.L. Listed, File #R11656, Control #63P6, ENERGY STAR®
FlintCoat™-A 300	Made of selected asphalts and pigment flakes of pure aluminum, blended with mineral fibers and refined solvents for heavy duty performance capability. Aluminum flakes form a reflective metallic shield over the base material to create a self-protecting roof coating with long-lasting moisture- and heat-resistant properties.	Meets or exceeds ASTM D2824, Type II, ASTM D3805, ASTM D962 Type II, U.L. Class A Listed, File #R11656, Control #63P6, ENERGY STAR®
FlintCoat™-A 150	Made of selected asphalts and pigment flakes of pure aluminum, blended with mineral fibers and refined solvents for heavy duty performance capability. Aluminum flakes form a reflective metallic shield over the base material to create a self-protecting roof coating with long-lasting moisture- and heat-resistant properties.	U.L. Class A Listed, File #R11656, Control #63P6; Miami-Dade Approved
FlintCoat™-A NF	Non-fibered aluminum roof coating formulation of selected asphalts, refined solvents and fine aluminum flakes that form a reflective metallic shield over the base material, creating a self-protecting roof coating with long-lasting moisture- and heat-resistant properties.	UL Class A Listed, File #R11656, Control #63P6, Miami-Dade Approved
FlintCoat™-W	A copolymer elastomeric emulsion exterior protective coating that provides excellent protection, appearance, mildew resistance, color stability, weatherability and flexibility.	U.L. Listed, File #R11656, Control #63P6, ENERGY STAR®
FlintCoat™-E	Emulsion roof coating made with refined asphalt, bentonite clay, emulsifiers and fibers for brush or spray application on smooth surface and metal roofs. Withstands variations in temperature and weather, and resists the absorption of exterior moisture. No odor or fumes.	Meets or exceeds ASTM D1227 Type II, Class I, ASTM D1187 Type I and II, U.L. Listed, File #R11656, Control #63P6, FM Approved, Miami-Dade Approved

Repair

PRODUCT NAME	DESCRIPTION	SPECIFICATIONS
FlintPatch™	Asbestos-free wet/dry rubberized flashing cement, compounded with a blend of rubber-reinforced asphalt, mineral fibers and refined solvents in a heavy, pliable consistency for ease of application by trowel.	Meets or exceeds ASTM D4586 Type I and ASTM D3409, Fed. Spec C-153 Type 1 (Asbestos Free), Miami-Dade Approved

CertainTeed Full Systems



BUR (Built-Up Roofing)



APP Modified Bitumen



SBS Modified Bitumen



Self-Adhering SBS Modified Bitumen



Primer




Adhesive




Coating



Repair

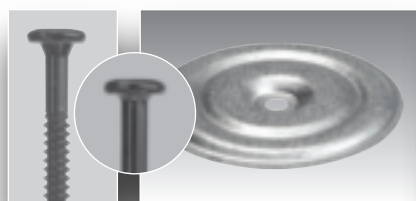

Fasteners

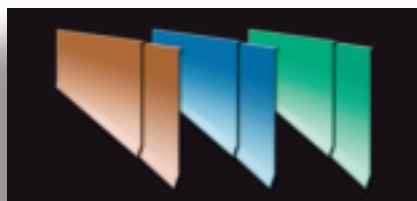

FlintEDGE™



Insulation

For more information on CertainTeed Commercial Roofing Products, go to www.certainteed.com.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • FOUNDATIONS
GYPSUM • CEILINGS • INSULATION • PIPE

www.certainteed.com <http://blog.certainteed.com>

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777

© 3/12 CertainTeed Corporation, Printed in U.S.A.
Code No. COMM-080

