ClarkDietrich BUILDING SYSTEMS

09.22.00 (Support for Plaster & Gypsum Board)

Metal Trims

Metal L-Trim #200-B (M20B)
Metal Trim

Metal L-Trim is used to provide a clean finished edge at door and window openings or when wallboard abuts dissimilar surfaces such as suspended ceilings, beams, plaster, masonry and concrete. L-Trim is installed after the gypsum panels are already in place, unlike mudable J, which must be installed during gypsum panel installation. L-Trim is easily attached with screws or nails after the panels are in place. Installation is completed with joint compound for a smooth ready-to-paint surface.

Product Data & Ordering Information

Material: 0.012 min thickness, G30 galvanized
Dimensions: 1-1/4" leg x Width

Width	Length	Wt./Ctn.	Pcs./Ctn.
1/2"	8'	28 lbs	50
1/2"	10'	35 lbs	50
5/8"	8'	28 lbs	50
5/8"	10'	35 lbs	50

- Hemmed front flange for rigidity
- Knurled, perforated flange enhances joint compound adhesion
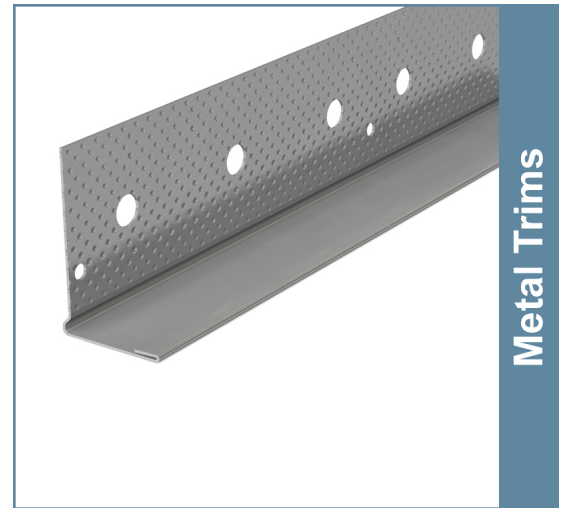- Easy to attach and finish

ASTM & Code Standards:

- ASTM C1047
- MSDS & Product Certification Information available at www.clarkdietrich.com
- MSDS & Product Certification Information available at www.clarkdietrich.com

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

GREEN Benefits and Recycled Content:

LEED Credit MR 2 - ClarkDietrich products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream. The contribution to LEED must be calculated by the contractor based on weight or volume.

LEED Credit MR 4 - ClarkDietrich's steel products have a minimum recycled content of 34.9%, of which 24.3% is post-consumer, and 9.4% is pre-consumer. To report a higher number for your project or seek Credit MR 5, contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com.

Project Information	**Contractor Information**	**Architect Information**
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax: