




WallEase® Basecoat

Stucco Leveler

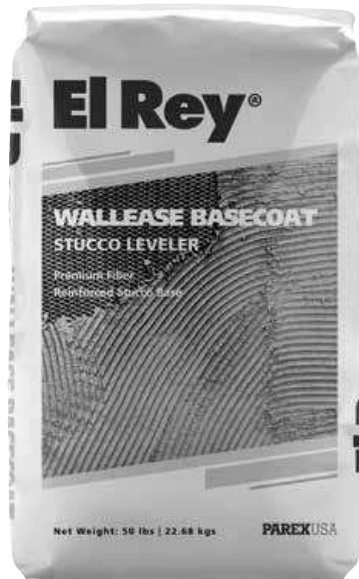

DESCRIPTION:

- WallEase® Basecoat can be used as a level coat over stucco, masonry, CMU or decorative EPS foam shapes.
- WallEase is a polymer modified cement basecoat that can be used in a variety of repair applications for Stucco and masonry.
- A blend of cement, lime, aggregate, fibers and dry polymer.
- Benefits to using WallEase basecoat over CMU are:
 - Minimizes telegraphing of block wall (CMU) grout joints by evening the suction/absorption of blocks and mortar.
 - Used as a block wall (CMU) skim coat to level uneven surfaces.
 - Flexible application: product can be applied in multiple layers.

USES:

Used to level the surface of block walls, foundations and other cement based surfaces in preparation for an acrylic/ elastomeric colored textured finish texture finish.

COVERAGE:

- 21-25 ft² (1.95-2.32 m²) per bag at 1/4 inch (6mm) average thickness
- 42-50 ft² (3.90-4.65 m²) per bag at 1/8 inch (3mm) average thickness
- 85-100 ft² (7.90-9.29 m²) per bag at 1/16 inch (1.5mm) average thickness

CONTAINER:

- 50 lbs. (22.7 kg) net weight in a multi-wall moisture-resistant bag.
- Storage: Store off ground and protect from rain and moisture.
 - Shelf Life: Reference Parex USA Expiration Date of Products Technical Bulletin.

SURFACE PREPARATION:

- Remove loose debris before applying WallEase basecoat.
- Moistened cement surfaces prior to application.
- Holes and cracks deeper than 3/8 inch (10mm) should be filled with a thick mixture of WallEase and be allowed to harden before basecoat is applied.
- If applying WallEase over a painted surface, verify that paint is a well bonded latex and is clean and free of all chalking and foreign debris before applying WallEase. Apply Superior Bond 100 prior to basecoat application.

MIXING:

Gallons of Water per 50lb.
(22.68kg) Bag of WallEase®

US Gallons (Liters) of Water

Type of Work	3/4 (2.84L)	1 (3.79L)	1-1/4 (4.73L)
Deep hole patching	■		
WallEase Block Wall (3/8 inch/9.5mm thickness)	■		
WallEase Block Wall (1/8 inch/3.2mm thickness)		■	
Foundation plaster coating (1/8 inch/3.2mm thickness)		■	
Krak-Master™ Mesh embedding			■
WallEase Block Wall (1/16 inch/1.6mm or less thickness)			■

- WallEase basecoat is mixed with cool, clean and potable water depending on the intended use and the desired consistency (see chart above).
- WallEase basecoat can either be mixed with a hoe in a wheelbarrow or can be slowly mixed with a drill and mortar paddle in a bucket.
- Add 90% of all water to start, followed by slowly adding the WallEase basecoat powder.
- Mix completely, adding only small amounts of water as necessary.
- Once mixed, allow material to sit for 5 minutes, then briefly remix before application.
- Use mixed material within 2 hours. Ensure that mixture is kept out of direct sunlight to prolong pot life.

APPLICATION:

Over CMU (cinder block) Walls:

- Depending on the maximum surface variation of the wall, apply WallEase basecoat in sufficient thickness (see mixing chart above) to completely cover blocks so that their shape does not protrude from basecoat.
- WallEase basecoat can be applied with the traditional hawk and trowel method.
- To plumb and smooth the surface, spread the material around the wall with a 12 inch (30.48cm) drywall taping knife. Avoid cutting into the mortar joints by spreading the basecoat at an angle to the joint. Once the material is smooth and plumb, allow it to harden to a firm consistency.
- Before the WallEase basecoat is completely dry, float the surface with a damp plaster float (green sponge with handle). This process will remove any minor defects in the original basecoat application.

Over Foundation Walls:

- Apply a thin layer (see mixing chart) of WallEase basecoat over surface.
- If surface has only minor deviations, a brush applied mixture of WallEase may be sufficient.
- If plumbing and smoothing is required, please refer to the procedures for CMU above.
- WallEase basecoat can be left as a finish if only a gray, concrete appearance is desired.

LIMITATIONS:

- Not recommended for use with non-modified portland cement based finishes.
- Applications over flat latex paint require priming with Superior Bond 100.
- Do not use over oil based paints.
- WallEase basecoat cannot be subjected to temperatures less than 40°F (4°C) for at least 72 hours after application. Avoid temperatures in excess of 100°F (39°C) during application.
- May cause eye, skin or lung injury. Wear NIOSH approved mask with appropriate eye and skin protection.
- Keep product out of the reach of children.

WARNING:

- Read complete warning information printed on product container prior to use. For medical emergency information, call 1-800-424-9300.
- For more information on handling this product refer to its Safety Data Sheet (SDS). The most current SDS and Product Data Sheet (PDS) can be found on our website.
- This Product Data Sheet has been prepared in good faith on the basis of information available at the time of publication. It is intended to provide users with information about the guidelines for the proper use and application of the covered product(s) under normal environmental and working conditions. Because each project is different, Parex USA, Inc. cannot be responsible for the consequences of variations in such conditions, or for unforeseen conditions.

Parex USA, Inc.
4125 E. La Palma Ave., Suite 250
Anaheim, CA 92807
(866) 516-0061 Tech Support: (800) 226-2424

Facilities
French Camp, CA
North Hollywood, CA
Riverside, CA
San Diego, CA

Colorado Springs, CO
Haines City, FL
Duluth, GA
Redan, GA

Albuquerque, NM
Allentown, PA
San Antonio, TX



EIMA

SMA



PAREXUSA
SUSTAINABILITY