



Submittal Sheet #0309049

## Woody Flat Head Yellow Zinc



Product:	Item#	Description	Unit Pack
	V78125YZ	Yellow Zinc 8x 1-1/4", Flat Head, 5lb	1038 pcs.
	V78150YZ	Yellow Zinc 8x 1-1/2", Flat Head, 5lb	851 pcs.
	V78175YZ	Yellow Zinc 8x 1-3/4", Flat Head, 5lb	730 pcs.
	V78200YZ	Yellow Zinc 8x 2", Flat Head, 5lb	658 pcs.
	V78250YZ	Yellow Zinc 9x 2- 1/2", Flat Head, 5lb	431 pcs.
	V78275YZ	Yellow Zinc 9x 2- 3/4", Flat Head, 5lb	400 pcs.
	V78300YZ	Yellow Zinc 9x 3", Flat Head, 5lb	370 pcs.
	V78350YZ	Yellow Zinc 10x 3- 1/2", Flat Head, 5lb	275 pcs.
	V78400YZ	Yellow Zinc 10x 4", Flat Head, 5lb	240 pcs.

Add the following to item #s when ordering YZ = Yellow Zinc Z=silver zinc RG = GrabberGard

**Application:** Use GRABBER Woodys with silver or yellow zinc coating for wood interior carpentry projects.  
Use GRABBER Woodys with GrabberGard™ 1000 hr. salt spray tested screws for decks, docks, fences, patio overheads, gazebos, planter boxes, railings, etc.

**Description:** Extra strong 8 and 10 gauge screws in both interior and superior exterior finishes, flat ribbed head for flush seating in wood, single lead coarse thread, 8 TPI for holding power and fast penetration. #2 square for positive recess engagement and no cam out. Woodys GrabberGard® Screws are ACQ Compliant.

**Directions:** Use standard screw gun with depth sensitive nose piece. Suggested screw gun for optimum performance is 4 amps minimum and 0 to 4,000 rpm. Bugle Head is completely seated when the head is flush with the work surface. Overdriving may result in failure of the fastener or stripping of the head recess. For wood to wood connections, a minimum of 1 1/4" penetration is necessary using an 8 gauge screw.

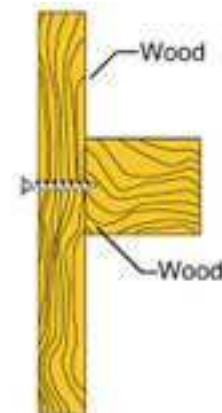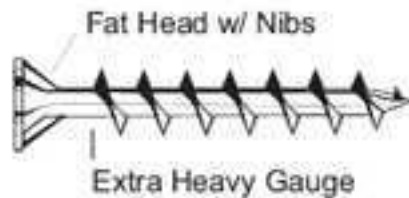



Submittal Sheet #0309049

SUBMITTAL APPROVALS:

---

JOB NAME

---

CONTRACTOR

DATE

TRADEMARKS:

The following trademark used herein is owned by John Wagner Associates, Inc.: GRABBER

NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.



Submittal Sheet #0309049

## Woody Flat Head Yellow Zinc



### Features:

Use WOODYS Zinc Finished Screws for Interior Projects like Cabinets, Paneling, Furniture, Wood Framing, Stairs, Wood Trim and More.



### PRODUCT SPECIFICATIONS

Fastener Classification	Interior Wood, Exterior Wood
Fastener Head	Flat
Fastener Drive	#2 Square
Fastener Gauge	#8, #9, #10
Fastener Point	Grabber
Fastener Package Type	Packaged Screws
Fastener Package Weight	1lb Box, 5lb Box, Bulk Box

### STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, no red rust
Yellow Zinc	Salt Spray Results	ASTM B117	48 hours, no red rust
Clear Zinc	Salt Spray Results	ASTM B117	24 hours, no red rust
Dracrotized	Salt Spray Results	ASTM B117	500 hours, no red rust
GrabberGard	Salt Spray Results	ASTM B117	1,000 hours, no red rust
GrabberGard	Kesternich Results	DIN 50018, 2.0L	15 cycles, no red rust

All GRABBER screw products are manufactured in facilities that are ISO 9002 and ISO 14001 certified and approved. The fasteners comply with SAE J78 and ASTM C 1002, as referenced in ICBO report ER-5280, and are approved for use by the Uniform Building Code. ©2005 John Wagner Associates, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX™, GRABBERGARD®, and SCAVENGER® are registered names or trademarks by John Wagner Associates, Inc., dba Grabber Construction Products.