


THE NEW VALUE FRONTIER



KC167G

HIGH EFFICIENCY
MULTICRYSTAL
PHOTOVOLTAIC
MODULE

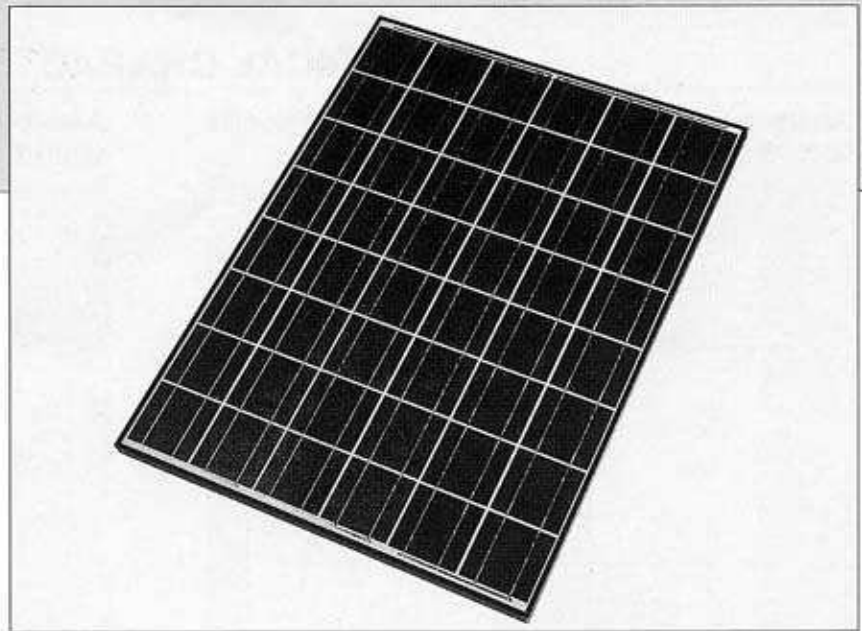

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce a highly efficient multicrystal photovoltaic module.

The conversion efficiency of the Kyocera solar cell is 15%

These cells are encapsulated between a tempered glass cover and an EVA pottant with back sheet to provide maximum protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

Equipped with plug-in connectors.

APPLICATIONS

KC167G is ideal for grid tie system applications.

- Residential roof top systems
- Large commercial grid tie systems
- Water Pumping systems
- High Voltage stand alone systems

QUALIFICATIONS

UL1703 certified.

PERFORMANCE WARRANTY

25 year* limited warranty on power output

SPECIFICATIONS

■ Electrical Specifications

MODEL	KC167G
Maximum Power	167 Watts
Maximum Power Voltage	23.2 Volts
Maximum Power Current	7.20 Amps
Open Circuit Voltage	28.9 Volts
Short-Circuit Current	8.00 Amps
Length	1290mm (50.8in.)
Width	990mm (39.0in.)
Depth	36mm (1.4in.)
Weight	18.0kg (35.3lbs.)

■ Thermal parameters


Nominal Operating Cell Temperature	47°C
Isc Current temperature coefficient (A/°C)	(8.60 × 10 ⁻³) A/°C
Voc Voltage temperature coefficient (V/°C)	(-1.12 × 10 ⁻¹) V/°C

Note: The electrical specifications are under test conditions of irradiance of 1kw/m², Spectrum of 1.5 air mass and cell temperature of 25°C

Kyocera reserves the right to modify these specifications without notice

■ Physical Specifications


(Unit: mm)

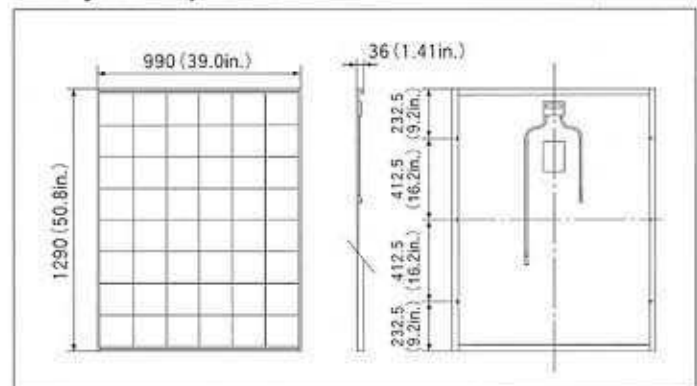


*Power output of the module after 25 years will not be less than 80% of the minimum power specified in the data sheet.

ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC167G at various cell temperatures

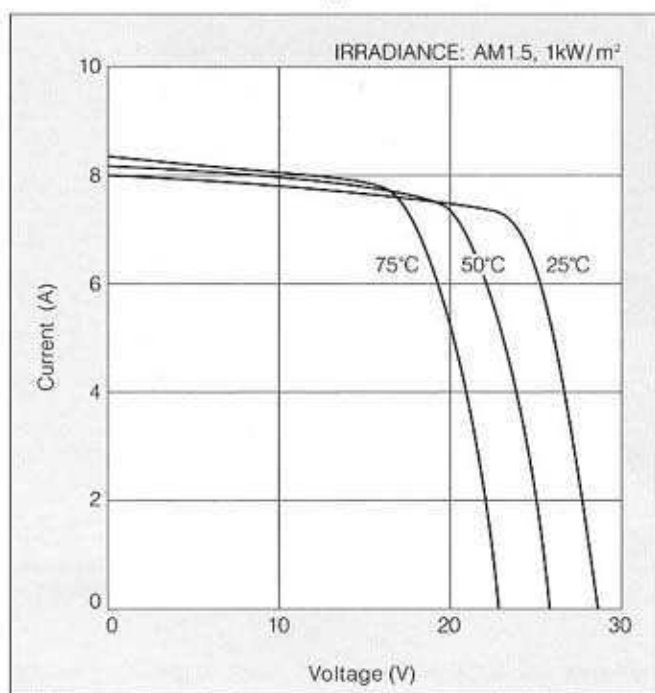

Current-Voltage characteristics of Photovoltaic Module KC167G at various irradiance levels

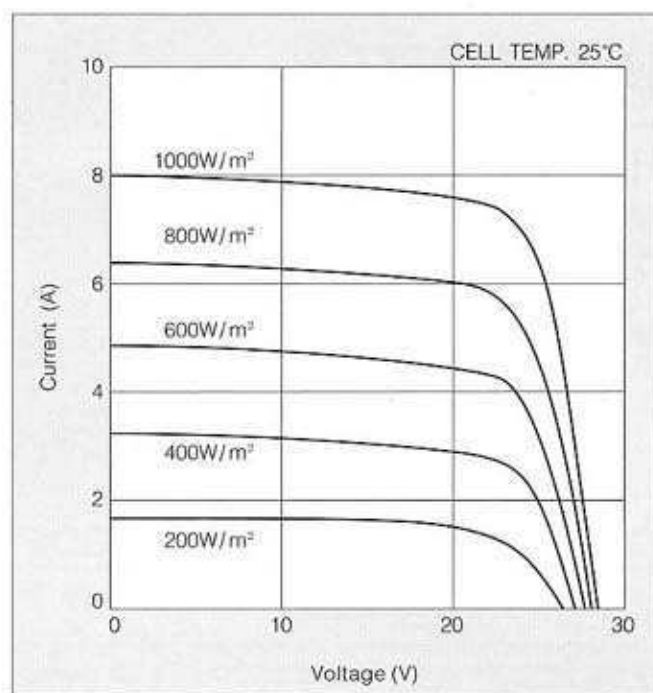

QUALITY ASSURANCE

Kyocera multicrystal photovoltaic modules exceed government specifications for the following tests.

- Thermal cycling test
- Thermal shock test
- Thermal/ Freezing and high humidity cycling test
- Electrical isolation test
- Hail impact test
- Mechanical, wind and twist loading test
- Salt mist test
- Light and water-exposure test
- Field exposure test

Please contact our office to obtain details without hesitation.



KYOCERA Corporation

■ KYOCERA HEAD OFFICE

SOLAR ENERGY DIVISION
6 Takeda Tobadono-cho
Fushimi-ku, Kyoto
612-8501 Japan
Phone:(81)75-604-3476 Telefax:(81)75-604-3475
<http://www.kyocera.co.jp>

● KYOCERA FINECERAMICS GmbH

Fritz Muller StraÙe 107, D-73730 Esslingen, F.R.G.
Phone:(49)711-9393417 Telefax:(49)711-9393450

● KYOCERA ASIA PACIFIC PTE. LTD.

298 Tiong Bahru Road, #13-03/04/05
Central Plaza, Singapore 168730
Phone:(65)271-0500 Telefax:(65)271-0600

● KYOCERA ASIA PACIFIC LTD.

Room 803, Tower 1 South Seas Centre, 75 Mody Road,
Tsimshatsui East, Kowloon Hong Kong
Phone:(852)2-7237183 Telefax:(852)2-7244501

● KYOCERA ASIA PACIFIC LTD., TAIPEI BRANCH

Suite 501, Asia Enterprise Center,
No.142-144, Sec. 3, Min Chuan E. Road Taipei, Taiwan
Phone:(886)2-2718-3595 Telefax:(886)2-2718-3587

● Kyocera Solar, Inc.

7812 East Acoma Drive
Scottsdale, AZ 85260
Phone:(480)948-8003 or (800)223-9580 Telefax:(480)483-6431

● Kyocera Solar Pty, Ltd.

Gnr Forbes St & Riverside Drive
West End, QLD, 4102 Australia
Phone:(61)7-3844-6686 Telefax:(61)7-3844-8569

● Kyocera Solar do Brazil Ltda.

R.Mauricio da Costa Faria, 85
Recreio dos Bandeirantes-Rio de Janeiro
Cep:22.790-280
Phone:(55)21-2437-8525 Telefax:(55)21-2437-2338