

SBS MODIFIED
**EZ-RIDGE™ &
 EZ-RIDGE XT™**
 SHINGLES

SUPERIOR DESIGN

EZ-Ridge™ shingles are manufactured with premium SBS rubberizing asphalt to create flexibility and a stronger, long-lasting shingle. Coating shingles with rubberizing asphalt allows for flexibility, weatherability, and outstanding granule adhesion.

Malarkey Roofing Products' EZ-Ridge™ and EZ-Ridge XT™ decorative elevated design ridge shingles add value and boldly distinguish your roof to create a beautiful finishing touch to your home.

SCOTCHGARD™ PROTECTION FROM 3M

EZ-Ridge XT™ shingles feature the Scotchgard™ Algae Resistant Roofing Protection from 3M with a 20-year warranty. Scotchgard™ protection from 3M is the single most effective solution against algae damage.



EZ-RIDGE™ 8" (203 MM) &
 EZ-RIDGE XT™ 10" (254 MM)

SBS MODIFIED
**HIP & RIDGE
 STRIPS**

EXCEPTIONAL PERFORMANCE

Malarkey Roofing Products' 225 Hip & Ridge Strips 10" (254 mm) and 227 Hip & Ridge Strips 12" (304.8 mm) respond to the demands of a high performance hip and ridge cap for all shingled roofs, supporting an array of ridge vents.

Providing easy and quick installation, Malarkey Hip & Ridge Strips are manufactured perforated with low exposure creating a traditional hip and ridge appearance.

SCOTCHGARD™ PROTECTION FROM 3M

225 and 227 Hip & Ridge Strips feature the Scotchgard™ Algae Resistant Roofing System from 3M with a 20-year warranty. 3M Scotchgard™ protection from 3M is the single most effective solution available against algae damage.



225 HIP & RIDGE STRIPS 10" (254 MM)
 227 HIP & RIDGE STRIPS 12" (304.8 MM)

MALARKEY'S SBS
"RUBBER" MODIFIED SHINGLES

...are awarded the Class 4 impact resistant rating, the best possible rating.



Legacy®, Ecoasis Premium™, Hurricane™, the Alaskan™, and Hip & Ridge shingles are manufactured with higher quality asphalt. The superior asphalt allows Malarkey to blend styrene-butadiene-styrene (SBS) polymers creating modified bitumen, rubberized asphalt.

SBS "RUBBERIZED" SHINGLES ENSURE:

- Superior impact resistance
- Excellent strength and elasticity
- Installation in cold weather
- Better granule adhesion
- Top performance at extreme temperatures

As the temperature fluctuates throughout the day, granules expand and contract. SBS Rubberized asphalt serves many functions. The rubber asphalt allows for movement as the granules expand or contract with the change in temperature from hot to cold. The adhesive characteristics of SBS asphalt perform as super glue, holding the granules in place.

Malarkey's SBS Rubberized modified products are specifically manufactured to retain granules on the shingles, exceeding the ASTM granule retention test up to 75 percent. The longer granules hold to the shingles, the longer shingles will last. The adhesive and cohesive properties of SBS polymerized shingle products are key to shingle longevity.

NOTE Sample pieces or photographs of shingles may not accurately represent the true color or variations of color blends that will appear on the roof. Before installation, five or six shingles should be laid out and reviewed for conformity to desired color level. If color levels are unsatisfactory, advise your dealer before proceeding with installation. Colors and specifications subject to change without notice. Limited warranties carry terms and conditions. Contact your nearest Malarkey source for further information. *Malarkey Roofing systems require algae resistant EZ-Ridge XT™ 224 shingles or Hip and Ridge shingles 225 & 227, in conjunction with the algae resistant shingles, to receive the full 20 year algae resistant warranty system. Hurricane™ (240) featuring Scotchgard™ Algae Resistant Protection from 3M can be substituted as Hip and Ridge shingle, in conjunction with the algae resistant shingles, to receive the full 20 year algae resistant warranty system. 3M and Scotchgard are trademarks of 3M Company. This version supersedes all previous versions. Rev. 4/12.

MALARKEY ROOFING PRODUCTS
 P.O. BOX 17217
 PORTLAND, OREGON 97217
 WWW.MALARKEYROOFING.COM
 (800) 545-1191 • FAX: (503) 289-7644



Malarkey
Roofing Products™


SBS Rubber Modified Shingles

WWW.MALARKEYROOFING.COM

LEGACY[®] SHINGLES

- 10 Year Right Start™ Labor & Materials Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty Available
- Transferable Your Choice™ Warranty Program
- SBS “Rubber” Modified Construction
- Class 4 Impact Resistance
- Legacy[®] Shingles are Available with Scotchgard™ Algae Resistant Roofing System from 3M
- SBS “Rubber” Modified Construction
- Class ‘A’ Fire Rating
- ASTM D3462, ASTM D3018 Type I, ASTM D3161 Class F, ASTM D7158 Class H, ICC ESR 3150, CSA A123.5, FBC Approval #14767
- Features Malarkey’s Patented ZONE[®] Technology

**50
YEAR**
LIMITED
WARRANTY




ECOASIS Premium™ SHINGLES

- 10 Year Right Start™ Labor & Materials Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty Available
- Transferable Your Choice™ Warranty Program
- Listed with CRRC as a “Cool Roof”
- SBS “Rubber” Modified Construction
- Class 4 Impact Resistance
- Ecoasis Premium™ features Scotchgard™ Algae Resistant Roofing System from 3M
- Class ‘A’ Fire Rating
- ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM D7158 Class H, ICC ESR 3150, CSA A123.5, FBC Approval #14767
- Features Malarkey’s Patented ZONE[®] Technology

**50
YEAR**
ENHANCED
LIMITED
WARRANTY



LEGACY

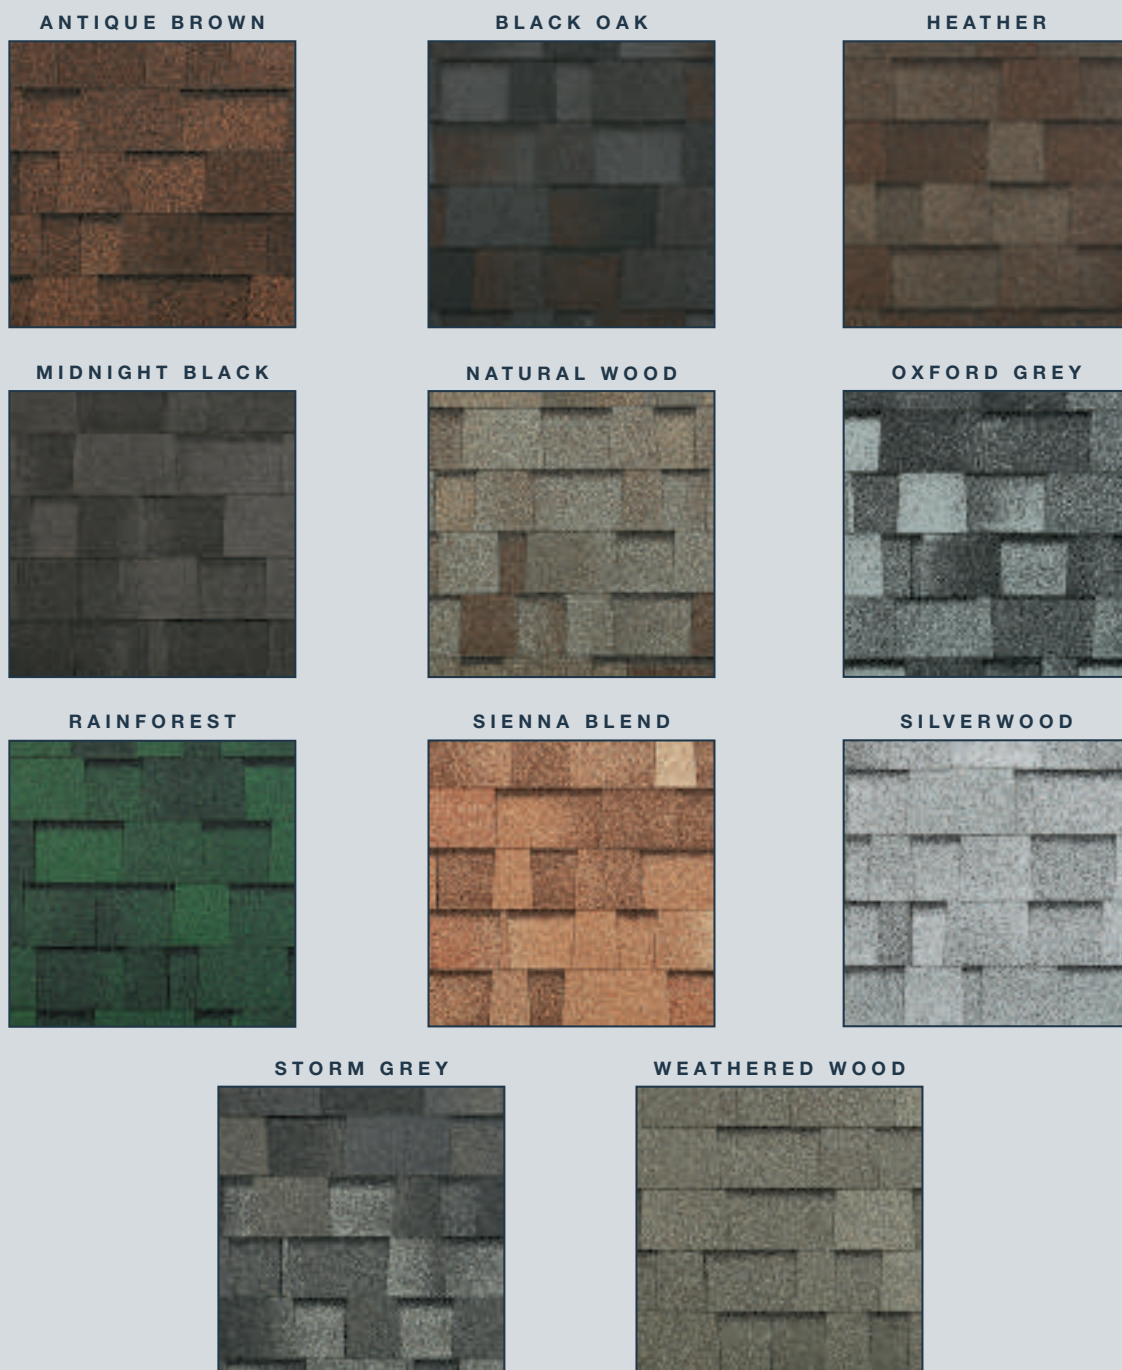

ECOASIS Premium™



HURRICANE & THE ALASKAN[™] SHINGLES

- 5 Year Right Start™ Labor & Materials Warranty
- 100 mph (161 kph) Limited Wind Warranty
- Enhanced Wind Warranty Available
- Transferable Your Choice™ Warranty Protection
- SBS “Rubber” Modified Construction
- Class 4 Impact Resistance
- Hurricane™ features Scotchgard™ Algae Resistant Roofing System from 3M
- Class ‘A’ Fire Rating
- ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM D7158 Class H, ASTM E108 Class A, ICC ESR 3150, CSA A123.5, FBC Approval #14767

**35
YEAR**
ENHANCED
LIMITED
WARRANTY



HURRICANE & THE ALASKAN[™]

