



The Chemical Company

Color Portfolio

Standard Colors for Flooring



Standard Colors




Wheat



Moondust




High Reflective



Leather



Natural




Light Reflective



Mist



Tomahawk




Stonewall



Lagoon



Envy

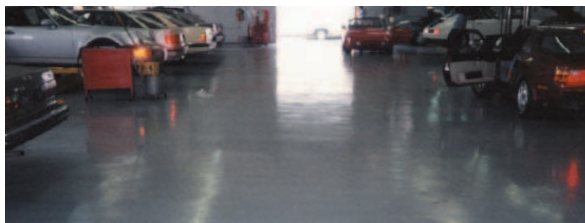

Colors above serve only as a visual guide for initial selection of color. It is important to note that the colors seen will vary depending on your monitor settings, as well as by the specific settings for your color printer, should you print the results of your search. See your BASF distributor for actual color samples.

BASF Building Systems understands the diversity of flooring applications and offers a wide range of flooring systems to meet varying conditions. Whether it is a light, medium, heavy duty or extra heavy duty application, refer to the Flooring Products Selection Guide for product information.

Use this Standard Color Chart for assistance in selecting the right colors for your project. BASF Building Systems products are field proven in a variety of markets including:

- Retail
- Commercial
- Industrial
- Institutional
- Warehouse
- Waste Transfer

Special Considerations

- Colors, including "Natural", "Light Reflective", and "High Reflective" may vary dramatically from those shown in this color card depending on type of product (mineral, metallic, epoxy, etc.), texture, variances in raw materials, local concrete, job conditions, application rates, curing, and finishing techniques.
- This Color Card reflects samples prepared with MASTERCRON® material at a rate of 1.5 lb/ft² (7.3 kg/m²), and cured with MASTERKURE® 200W material as directed.
- Due to iron content, metallic aggregate dry shakes will appear "darker" than colors shown.
- Appearance and color of LUMIPLATE®, MASTERTOP® ANVIL-TOP®, MASTERPLATE® DPS, and MASTERTOP® TOPPING 112 products vary based upon raw material.
- If color is important, BASF Building Systems recommends that an 8 ft² (5.95 m²) jobsite sample be prepared by installation contractor using actual product, installation and finishing techniques, for appropriate approvals prior to actual job installation.
- BASF Building Systems recommends an actual jobsite visit with a local representative to a completed project, prior to specifying a floor. It is critical that jobsite needs and expectations are reviewed.

Color Availability

PRODUCT NAME	PRODUCT TYPE	AGGREGATE TYPE	COLOR AVAILABILITY
MASTERCRON®	Dry Shake	Mineral	Standard
MAXIMENT®	Dry Shake	Mineral	Natural only
MASTERPLATE®	Dry Shake	Metallic	Standard*
LUMIPLATE®	Dry Shake	Metallic	Light Reflective
MASTERPLATE® DPS	Dry Shake	Metallic	Natural iron black only
MASTERTOP® ANVIL-TOP® 300	Topping	Metallic	Natural iron gray only
MASTERTOP® TOPPING 112	Cement Topping	Mineral	Natural only
MASTERFILL® 300i	Epoxy Joint Filler	Epoxy	Standard

* MASTERPLATE® is available in all standard colors except High Reflective.

**BASF Construction Chemicals, LLC –
Building Systems**

889 Valley Park Drive
Shakopee, MN 55379

www.BuildingSystems.BASF.com

Customer Service 800-433-9517
Technical Service 800-243-6739

LIMITED WARRANTY NOTICE Every reasonable effort is made to apply BASF exacting standards both in the manufacture of our products and in the information which we issue concerning these products and their use. We warrant our products to be of good quality and will replace or, at our election, refund the purchase price of any products proved defective. Satisfactory results depend not only upon quality products, but also upon many factors beyond our control. Therefore, except for such replacement or refund, BASF MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, RESPECTING ITS PRODUCTS, and BASF shall have no other liability with respect thereto. Any claim regarding product defect must be received in writing within one (1) year from the date of shipment. No claim will be considered without such written notice or after the specified time interval. User shall determine the suitability of the products for the intended use and assume all risks and liability in connection therewith. Any authorized change in the printed recommendations concerning the use of our products must bear the signature of the BASF Technical Manager.

This information and all further technical advice are based on BASF's present knowledge and experience. However, BASF assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, BASF disclaims all WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. BASF SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. BASF reserves the right to make any changes according to technological progress or further developments. It is the customer's responsibility and obligation to carefully inspect and test any incoming goods. Performance of the product(s) described herein should be verified by testing and carried out only by qualified experts. It is the sole responsibility of the customer to carry out and arrange for any such testing. Reference to trade names used by other companies is neither a recommendation, nor an endorsement of any product and does not imply that similar products could not be used.

For professional use only. Not for sale to or use by the general public.

Form No. 1019584

© 2006 BASF 9/06 Printed in U.S.A.