

## Roofing Underlayment Systems

- New Construction, Additions and Repairs
- Commercial, Residential or Institutional Applications
- Self-Adhering and Self-Sealing
- Overall Weather and Waterproofing
- Secondary Water Resistance
- Protection from Ice Dams and Wind-Driven Rain
- Full Roof Underlayment Protection
- Roof Valleys and Eaves
- Skylight, Chimney and Roof Vent Flashing
- Metal Roofing Systems
- Sealing Dormer Additions
- Versatile Product Line



## Versatile Self-Stick Underlayment Solutions

MFM Building Products offers the best in underlayment technology solutions. Our family of self-adhesive, self-sealing membranes offer unmatched selection and performance. Ideal for both commercial and residential structures, you can stand behind your project with confidence by installing one of our innovative underlayments.

### An Underlayment for Any Application

Whether your project is new construction, structure addition or roof repair, our family of underlayments can be matched to the performance and cost factors for your application. MFM underlayments can be used as a trusted line of defense against water damage across the whole roof deck, as a secondary water resistance barrier or as flashing material for skylights, roof vents and chimneys.

*Realize increased savings, ease of installation, and reduced costs with MFM Building Products – a pioneer in the construction industry for more than 50 years!*



## MFM Building Products – The Right Choice

MFM backs all of our products with more than 50 years of research, experience and dedication to the industry, making us the recognized innovator and manufacturer of self-adhering membranes. We continually test and evaluate all of our products to ensure the highest quality, most value-based products available.

### The Solutions Provider

MFM not only provides industry proven products, but also backs all of our products with outstanding customer service and technical support. Regardless of the application, MFM Building Products Corp. is the right solutions provider.

**Call one of our  
professionals today  
at 800-882-7663  
to get your project  
on the right track.**





# MFM Family of Underlayments

The MFM line of underlayment products are self-adhering membranes that apply directly to the roof deck. The rubberized asphalt adhesive aggressively bonds to the substrate and self-seals around nails and other roofing fasteners.

- The minimum slope for installation is 2" per foot
- Protect from leaks caused by ice dams, melting snow and wind-driven rain
- May be applied over the entire roof deck, under roofing at edges, valleys, vents, skylights and chimneys
- Split release liner for ease of handling and installation



## **IB-3™ IceBuster**

An economical, 50-mil underlayment that protects from damage caused by ice dams, melting snow and wind-driven rain. It is rugged and time-tested in cold, rainy climates where ice dams quickly occur. May be left exposed for up to 60 days.

*Roll Sizes: IB-3™ IceBuster is available in roll sizes of 36" wide x 33', 67' or 75' lengths.*



## **IB-3™ StormStopper**

This mineral surface, 50-mil underlayment comes with a non-removable selvedge edge to ensure a secure seal on overlaps creating a water-tight roof deck installation. Installs under roofing at the edges and valleys, and as a whole roof covering to protect from leaks caused by ice dams, melting snow and blowing rain. May be left exposed for up to 60 days.

*Roll Size: IB-3™ StormStopper is available in a roll size of 36" wide x 67' length.*



## **IB-4™ StormStopper**

A superior, 60-mil mineral surface underlayment that creates a secondary water barrier when installed across the entire roof deck while providing excellent ice dam and waterproofing protection. A removable selvedge edge allows for a secure seal on overlaps. May be left exposed for up to 365 days.

*Roll Size: IB-4™ StormStopper is available in a roll size of 36" wide x 67' length.*



## **StormStopper FSU™ (Film Surface Underlayment)**

This 45 mil underlayment is composed of an embedded traction surface polymer film laminated to a rubberized asphalt adhesive. Installs under roofing at edges, eaves, valleys, skylights and chimneys to protect the structure from water penetration. May be left exposed for 14 days after installation.

*Roll Size: StormStopper FSU™ is available in a roll size of 36" wide x 66.7' length.*

## ShingleStarter Products

For more than 50 years, MFM has been an innovator in the construction industry and the ShingleStarter product line is no exception. ShingleStarter underlayments eliminate the need to cut shingle tabs saving valuable material costs, time and labor.

- Suitable for new construction or re-roofing applications
- Self-adhering and self-sealing around fasteners
- The minimum slope for installation is 2" per foot
- Sealing strip to prevent wind uplift at the roof edge
- Mineral surface with rubberized asphalt adhesive system
- Designed for ease of handling and installation
- May be left exposed for up to 60 days



## High Temperature Underlayments



You'll never have to compromise cost or quality when it comes to MFM high temperature underlayments. Designed and tested for the most extreme environments, these rubberized asphalt adhesive products stand up to the heat and deliver unmatched performance.

- High temperature rated
- Self-adhering and self-sealing around fasteners
- Engineered for use under all roofing materials
- The minimum slope for installation is 2" per foot
- Ideal for secondary water resistance
- Split release liner for ease of installation
- May be left exposed for up to 60 days



### **MFM Wind & Water Seal™**

This 40-mil underlayment is composed of a non-slip, cool white/gray polymer film that prevents damage from wind-driven rain. It also is ideal for secondary water resistance and prevents damage from ice dams. The non-slip surface includes overlap guide lines for easy installation.

*Roll Size: MFM Wind & Water Seal™ is available in a roll size of 36" wide x 67' length.*



### **MFM Wind & Water Seal Plus™**

A reinforced, self-stick 40-mil underlayment that is ideal for use under metal, shingles or tile. The cool white polymer surface prevents damage from wind-driven rain and provides secondary water resistance. A split release liner allows for easy installation.

*Roll Size: MFM Wind & Water Seal Plus™ is available in a roll size of 36" wide x 67' length.*

### IB-3 ShingleStarter™

This 36" wide, self-adhering, 50-mil underlayment serves the dual purpose of replacing conventional starter strips while providing ice and water dam protection in cold climates. IB-3 ShingleStarter comes with two self-sealing tabs on each edge to bond to the shingles. Also comes with a split release liner for ease of installation and at valley applications.

*Roll Sizes: IB-3 ShingleStarter™ is available in roll sizes of 36" wide x 33.5' or 67' lengths.*



### ShingleStarter™

This innovative, 50-mil shingle starter course features a peel-and-stick design for fast installation at the roof edge. The membrane is waterproof and comes with a seal strip to prevent wind uplift. ShingleStarter™ rolls are wrapped individually.


*Roll Size: ShingleStarter™ is available in a roll size of 7.2" wide x 33.5' length.*



### Premium Wind & Water Seal™

This 40-mil, textured black polymer film underlayment is suitable for use under all roofing materials while providing excellent foot traction. An advanced asphalt adhesive system aggressively bonds to the substrate and prevents damage caused by water penetration.

*Roll Size: Premium Wind & Water Seal™ is available in a roll size of 36" wide x 75' length.*

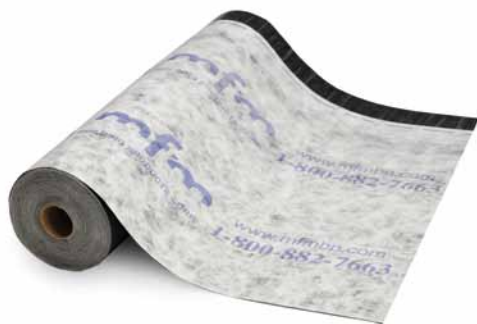

### STS Underlayment™

Is a superior, 75-mil self-stick underlayment that is intended to be used as a whole-roof underlayment. It installs directly to the roof deck and features an adhesive selvedge edge to ensure a secure, monolithic seal. It is designed for installation under metal roofing and bonds well with foam adhesive systems and traditional nail-down roof tiles.

*Roll Size: STS Underlayment™ is available in a roll size of 38" wide x 68.5' length.*





Product	Width	Length	Color	Thickness	°F Range	Warranty
<b>IB-3™ IceBuster</b>	36"	33' 67' 75'	Black	50 mils nominal	>40°	5-Year
Self-adhering, 50-mil granule surface underlayment prevents damage from ice build-up and wind-driven rain. Split release liner for easy installation.						
<b>IB-3™ StormStopper</b>	36"	67'	Black	50 mils nominal	>40°	5-Year
A 50-mil granule surface underlayment with a non-removable selvedge edge for a secure seal on overlaps to prevent water penetration. Self-adhering with a split release liner for easy installation.						
<b>IB-4™ StormStopper</b>	36"	67'	Black	60 mils nominal	>40°	10-Year
A superior, self-adhering, 60-mil granule surface underlayment with a removable selvedge edge for a secure seal on overlaps to prevent damage from ice build-up and wind-driven rain. Split release liner for easy installation.						
<b>StormStopper FSU™</b>	36"	66.7'	Black	45 mils nominal	>40°	5-Year
A reinforced, 45 mil, polymer film surface underlayment for use primarily under shingle roofs. Applies at edges, valleys and whole roof applications to protect from water penetration. Self-adhering, self-sealing with split release liner for easy installation.						
<b>IB-3 ShingleStarter™</b>	36"	33.5' 67'	Black	50 mils nominal	>40°	5-Year
Starter course, 50-mil granule surface underlayment, for asphalt shingle roofs. Also offers protection from ice dams, melting snow and wind-driven rain. Self-adhering, self-sealing with split release liner for easy installation.						
<b>ShingleStarter™</b>	7.2"	33.5'	Black	50 mils nominal	>40°	5-Year
Self-adhering, 50-mil granule surface starter course for asphalt shingle roofs. Adhesive strip bonds to shingles and prevents uplift at roof edge. Individually wrapped rolls. Release liner for easy installation.						
<b>MFM Wind &amp; Water Seal™</b>	36"	67'	White/Gray	40 mils nominal	>40° <250°	10-Year
High Temperature Rated. A 40-mil underlayment for use under metal, shingles or tile. Polymer surface with cool white/gray texture prevents damage from wind-driven rain. Self-adhering with split release liner for easy installation.						
<b>MFM Wind &amp; Water Seal Plus™</b>	36"	67'	White	40 mils nominal	>40° <250°	10-Year
High Temperature Rated. A reinforced, 40-mil underlayment for use under metal, shingles or tile. Cool white polymer surface is textured and self-adhering with split release liner for easy installation. Prevents damage from wind-driven rain.						
<b>Premium Wind &amp; Water Seal™</b>	36"	75'	Black	40 mils nominal	>40° <250°	10-Year
High Temperature Rated. A self-stick, 40-mil underlayment for use under all roofing materials. A textured black film provides good traction while protecting from penetrating water. Split release liner for easy installation.						
<b>STS Underlayment™</b>	38"	68.5'	White	75 mils nominal	>40° <250°	30-Year
High Temperature Rated. A superior, 75-mil, self-stick underlayment for metal and tile roofing. Composed of a high-grade polyester fabric, it has a selvedge edge to secure a tight seal on overlaps. Split release liner for easy installation.						

For more detailed information on MFM Underlayments; including technical data sheets, installation instructions, product approvals and warranties, please visit our website at [www.mfmbp.com](http://www.mfmbp.com).



**BUILDING PRODUCTS CORP.**

P.O. Box 340 • Coshocton, Ohio 43812  
800-882-7663 • [www.mfmbp.com](http://www.mfmbp.com)

**SNAP IT!**



Download a free QR Reader for your smartphone and snap a photo to request a FREE sample. You can also visit [www.mfmbp.com](http://www.mfmbp.com).