

Sikafloor® Epo-Rok Trowel Mortar System

Screed Mortar of 1/8 – 1/4 in (3 – 6 mm)

Description Sikafloor EpoRok Trowel System is a solid color, resin-rich, aggregate filled, seamless, epoxy based floor resurfacer with high density and compressive strength for exceptional durability. Typically installed to protect new concrete or re-profile existing worn floors at a thickness range of 1/8 - 1/4 in (3 - 6 mm). This heavy duty, general service epoxy system demonstrates good chemical resistance as well as superior abrasion and impact resistance. Sikafloor EpoRok Trowel System can be customized to meet aesthetic and slip-resistance requirements. Final surface appearance options include: unlimited color selection, slight or heavy orange peel, integral cove base, and variable surface texture to produce a range of slip-resistant finishes. This product can be placed using a screed and finished by hand troweling or power troweling.

Where to Use

- Dry processing areas.
- Factories-light to heavy duty manufacturing areas.
- High traffic aisles.
- Health care facilities.
- Beverage processing.
- Animal care facilities.
- Laboratories.
- Locker and shower rooms.
- Production lines.
- Garage service bays.

Advantages


- Superior mechanical resistance.
- High abrasion and impact resistance.
- Good chemical resistance.
- Durable, impermeable and seamless.
- Easily cleaned, maintained and a more sanitary work environment.
- Neutral odor.
- Protects new concrete from abuse
- Rejuvenates worn surfaces
- Resists heavy traffic
- Reduced downtime
- (Optional) Slip resistant surface
- (Optional) Integral cove, base and curbs

System Build Up

Coating	Product Name	Typical Thickness (mils)
Primer	Sikafloor 161	8 - 10
Epoxy Mortar	Sikafloor 160 EpoRok	1/8" - 1/4"
Grout Coat	Sikafloor 264 Thixo Lite	6 - 8
Top Coat	Sikafloor 264 Thixo Lite	6 - 8
Optional Top Coat	Sikafloor 315 ¹	3 - 3.5

¹ Sikafloor-315 would be an optional top coat on top of Sikafloor-264 Thixo lite for increased chemical and abrasion resistance (e.g. reduced scratching and staining, protection from chemical attack). Pigmented Sikafloor-315 provides excellent UV resistance and good color stability.

System Build Up Step Diagram

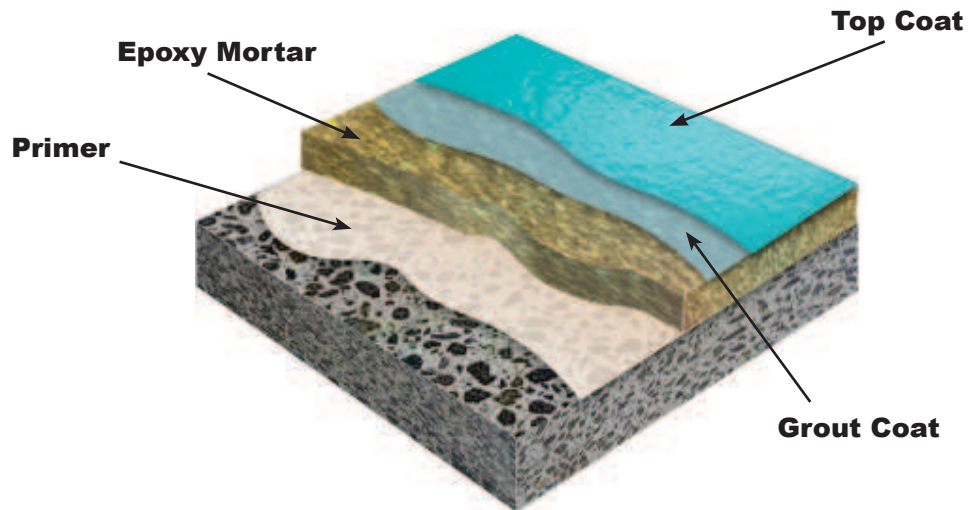

KEEP CONTAINER TIGHTLY CLOSED • KEEP OUT OF REACH OF CHILDREN • NOT FOR INTERNAL CONSUMPTION • FOR INDUSTRIAL USE ONLY

All information provided by Sika Corporation ("Sika") concerning Sika products, including but not limited to, any recommendations and advice relating to the application and use of Sika products, is given in good faith based on Sika's current experience and knowledge of its products when properly stored, handled and applied under normal conditions in accordance with Sika's instructions. In practice, the differences in materials, substrates, storage and handling conditions, actual site conditions and other factors outside of Sika's control are such that Sika assumes no liability for the provision of such information, advice, recommendations or instructions related to its products, nor shall any legal relationship be created by or arise from the provision of such information, advice, recommendations or instructions related to its products. The user of the Sika product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with the full application of the product(s). Sika reserves the right to change the properties of its products without notice. All sales of Sika product(s) are subject to its current terms and conditions of sale which are available at <http://usa.sika.com/> or by calling 800-933-7452.

Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's most current Product Data Sheet, product label and Safety Data Sheet which are available online at <http://usa.sika.com> or by calling Sika's Technical Service Department at 800-933-7452. Nothing contained in any Sika materials relieves the user of the obligation to read and follow the warnings and instruction for each Sika product as set forth in the current Product Data Sheet, product label and Safety Data Sheet prior to product use.

Sika warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKASHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKASHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Visit our website at www.sikafloorusa.com

1-800-933-SIKA NATIONWIDE

Regional Information and Sales Centers. For the location of your nearest Sika sales office, contact your regional center.

Sika Corporation
201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 800-933-7452
Fax: 201-933-6225

Sika Canada Inc.
601 Delmar Avenue
Pointe Claire
Quebec H9R 4A9
Phone: 514-697-2610
Fax: 514-694-2792

Sika Mexicana S.A. de C.V.
Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537

