

Cellular Rubber Extrusions

Product Description

Tremco Cellular Rubber Extrusions are fabricated into gaskets and accessories for use in sealing and glazing applications in building construction.

Metal Requirements

Tremco Cellular Rubber Extrusions are manufactured to meet existing metal designs or developed with custom metal systems at the design development stage. Many profiles are available depending upon existing metal requirements.

Packaging


Tremco Cellular Rubber Extrusions are packaged based on customer requirements, profile size, configuration and the need for molded picture frame gaskets.

Availability/Cost

Tremco Cellular Rubber Extrusions are generally custom manufactured but many standard designs are available. Their availability and cost may be obtained from your local Tremco representative, or by contacting our Customer Service Department in Ashland, Ohio, at 800-321-6357 or in Canada at 800-323-3213.

Warranty

We warrant our products to be free of defects. Under this warranty, we will provide, at no charge, product in containers to replace any product proven to be defective when applied, tested and cured (if applicable), in accordance with our written instructions, standards and in applications recommended by Tremco as suitable for this product. User shall determine suitability of the product for this intended use and assume all risk and liability therewith. Seller shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of this product. All claims concerning product defects must be made within twelve (12) months of shipment. Absence of such claims in writing, during this period, will constitute a waiver of all claims with respect to such product. This warranty is the user's sole remedy and in IN LIEU OF any and all other warranties, expressed or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

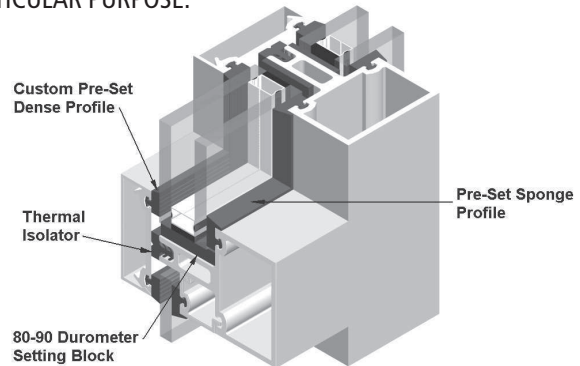

TYPICAL PHYSICAL PROPERTIES

Per ASTM C 509 Requirements

Property	Test Method	Flame Neoprene	Standard EPDM
Compression-Deflection 25% Deflection Limits	D-1056	18-24 psi (124-165 kPa)	19-24 psi (131-165 kPa)
Compression Set 22h @ 70°C	D-395	22-28%	26-30%
Ozone Resistance, 100h @ 40°C 40% Elongation, Type II 300 mPa	D-1149	No Cracks	No Cracks
Water Absorption, % weight	C-1083	2.0-3.0%	2.0-3.5%
Low-Temperature Brittleness @ -40°C	D-746	Pass	Pass
Flame Propagation, Option I	C-1166	Pass	-----
Flame Propagation, Option II	C-1166	No Limit	No Limit
Nonstaining	D-925	-----no migratory stain-----	



Tremco Commercial Sealants & Waterproofing

3735 Green Road, Beachwood, OH 44122 // Phone: 216.292.5000 // 800.321.7906
 220 Wicksteed Avenue, Toronto, ON M4H 1G7 // Phone: 416.421.3300 // 800.363.3213
 1451 Jacobson Avenue, Ashland OH 44805 // Phone: 419.289.2050 // 800.321.6357