

NEOPRENE

Flame Retardant Dense Rubber Extrusions

G

Product Description:

Tremco Flame Retardant Dense Neoprene Rubber Extrusions are fabricated into gaskets and accessories (such as setting blocks, spacers and shims) for use in sealing and glazing applications in building construction.

Metal Requirements:

Tremco Flame Retardant Dense Neoprene Rubber Extrusions are manufactured to meet existing metal designs or developed with custom metal systems at the design development stage. Many profiles are available depending upon existing metal requirements.

Packaging:

Tremco Flame Retardant Dense Neoprene Rubber Extrusions are packaged base on customer requirements, profile size, configuration and the need for molded picture frame gaskets.

Availability/Cost:

Tremco Flame Retardant Dense Neoprene Rubber Extrusions are generally custom manufactured but many standard designs are available. Their availability and cost may be obtained from your local Tremco Representative, or by contacting our Customer Service Department in Ashland, Ohio, at 800-321-6357 or in Canada at 800-363-3213.

Warranty:

Tremco warrants their products to be free of defects. Under this warranty, Tremco will provide, at no charge, products in containers to replace any product proven to be defective when applied, tested and

cured (if applicable), in accordance with Tremco's written instructions, standards and applications recommended by Tremco as suitable for this product.

User shall determine suitability of the product for their intended use and assume all risk and liability therewith. Seller shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of the product.


All claims concerning product defects must be made within 12 months of shipment. Absence of such claims in writing, during this period, will constitute a waiver of all claims with respect to such product. This warranty is the user's sole remedy and is IN LIEU OF any and all other warranties expressed or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.



TREMCO
VULKEM • PARASEAL

TYPICAL PHYSICAL PROPERTIES

Property	ASTM Test Method	Wedge Gaskets	Accessory Gaskets	Setting Blocks
Shore "A" Hardness	D-2240	68-72	58-60	82-86
Compression Set, 22h @ 100°C	D-395	22-26%	20-28%	26-30%
Ozone Resistance, 100 mPa, 100h @ 40°C, 20% Elongation	D-1149	No Cracks	No Cracks	No Cracks
Tensile Strength	D-412	1850-2050 psi (12.7-14.1 MPa)	1645-1725 psi (11.3-11.9 MPa)	1700-2065 psi (11.7-14.2 MPa)
Elongation @ Rupture	D-421	235-350%	350-478%	200-320%
Tear Strength	D-624	163-190 lb/in (28.5-33.3 kN/m)	159-172 lb/in (27.8-30.1 kN/m)	100-137 lb/in (17.5-24.0 kN/m)
Brittleness Temperature @ -40°C	D-746	Pass	Pass	Pass
Flame Propagation, Option I	C-1166	Pass	Pass	Pass

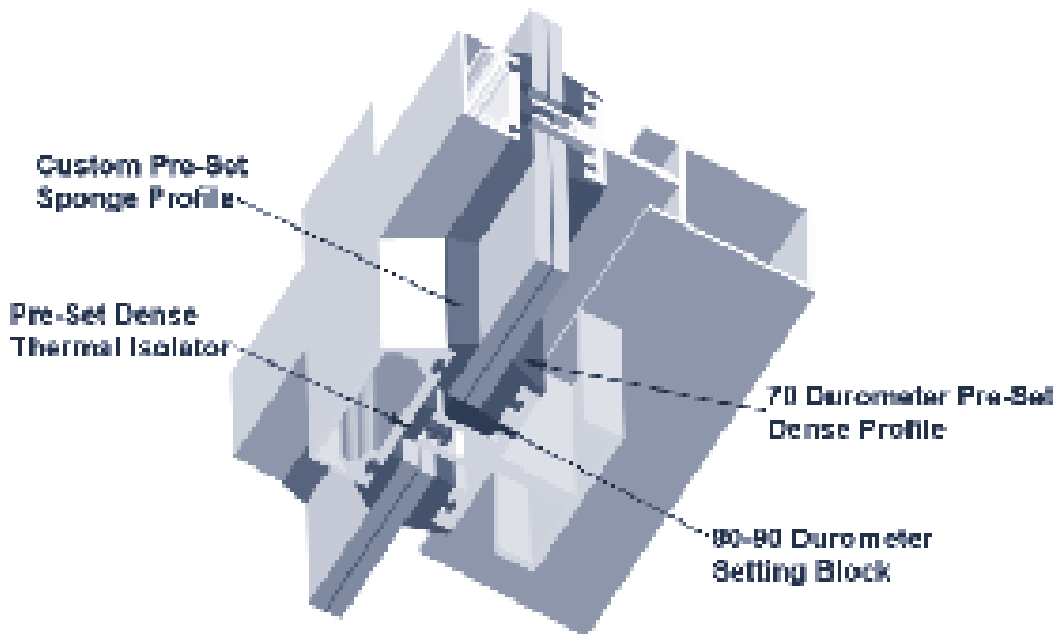

For MSDS and Spec Data Sheets,
Call our 24 Hour Fax-Back Line:
1-800-551-2806
or visit our website:
www.tremcosealants.com

TREMCO INCORPORATED

Sealant/Weatherproofing Division
Tremco • Mameco/Vulkem® • Paramount

3735 Green Road • Beachwood, Ohio • 44122 • Phone: (216) 292-5000 • (800) 321-7906
220 Wicksteed Avenue • Toronto, ON M4H 1G7 • Phone: (416) 421-3300 • (800)363-3213
1451 Jacobson Avenue • Ashland, Ohio • 44805 • Phone: (800) 321-6357 • Fax (419) 289-6645