

## SCR-880

### Silicone Compatible Rubber Extrusions

#### Product Description

SCR-880 Silicone Compatible Rubber Extrusions are fabricated into gaskets and accessories (such as setting blocks, spacers and shims) for use in sealing and structural glazing applications in building construction. Tremco must review all structural glazing applications. Custom color matching is available.

#### Metal Requirements

SCR-880 Silicone Compatible Rubber Extrusions are manufactured to meet existing metal designs or developed with custom metal systems at the design development stage. Many profiles are available depending upon existing metal requirements.

#### Packaging

SCR-880 Silicone Compatible Rubber Extrusions are packaged based on customer requirements, profile size and configuration.


#### Availability/Cost

SCR-880 Silicone Compatible Rubber Extrusions are generally custom manufactured but many standard designs are available. Their availability and cost may be obtained from your local Tremco Field Representative, or by contacting our Customer Service Department in Ashland, Ohio, at 800-321-6357 or in Canada at 800-363-3213.

#### Warranty

Tremco warrants their products to be free of defects. Under this warranty, Tremco will provide, at no charge, products in containers to replace any product proven to be defective when applied, tested and cured (if applicable), in accordance with Tremco's written instructions, standards and applications recommended by Tremco as suitable for this product. User shall determine suitability of the product for their intended use and assume all risk and liability therewith. Seller shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of the product.

All claims concerning product defects must be made within 12 months of shipment. Absence of such claims in writing, during this period, will constitute a waiver of all claims with respect to such product. This warranty is the user's sole remedy and is IN LIEU OF any and all other warranties expressed or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

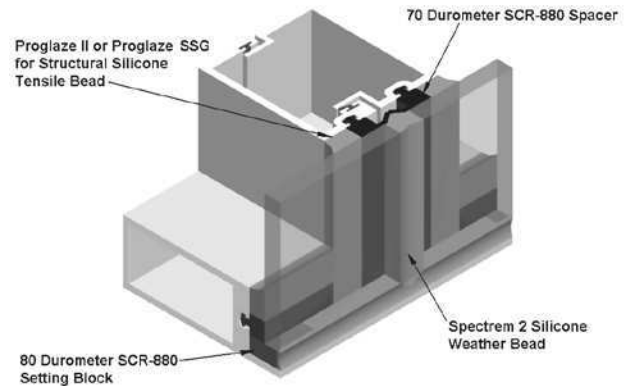

### TYPICAL PHYSICAL PROPERTIES

Per ASTM C 864 Requirements

Property	Test Method	60±5 Durometer	70±5 Durometer	80±5 Durometer
Shore "A" Hardness	D-2240	62	72	80
Compression Set, 22 h @ 100°C	D-395	55%	55%	55%
Ozone Resistance, 100 mPa, 100 h @ 40°C, 20% Elongation	D-1149	No Cracks	No Cracks	No Cracks
Tensile Strength	D-412	1400 psi (9.6 MPa)	1800 psi (12.4 MPa)	1900 psi (13.1 MPa)
Elongation @ Rupture	D-412	300%	270%	210%
Tear Strength	D-624	150 lb/in (26.3 kN/m)	160 lb/in (28.0 kN/m)	140 lb/in (24.5 kN/m)
Brittleness Temperature @ -40°C	D-746	Pass	Pass	Pass



#### Tremco Commercial Sealants & Waterproofing

3735 Green Road, Beachwood, OH 44122 // Phone: 216.292.5000 // 800.321.7906  
 220 Wicksteed Avenue, Toronto, ON M4H 1G7 // Phone: 416.421.3300 // 800.363.3213  
 1451 Jacobson Avenue, Ashland OH 44805 // Phone: 419.289.2050 // 800.321.6357