USG PANZ® METAL PANELS



IT'S YOUR WORLD, BUILD IT.

USG PANZ® METAL PANELS

ORDER SAMPLES/LITERATURE usg.com | samplit@usg.com fax: 888 874-2348 SEE LEED REPORT TOOL

TECHNICAL SERVICES 800 USG.4YOU (874-4968)






PRODUCT INFORMATION

Materials	Available Sizes	Finishes	
Panels: Aluminum	1'x4', 1'x5', 2'x2', 2'x4', 2'x6', 2'x8', 4'x4', 20"x60", 30"x30", 30"x60"	2'x2' panels available with perforation and/or embossing.	
Description	Optional Acoustical Material	Sound Rating - NRC	
		Perforation A062	Perforation A116
Perforated panel	Acoustibond™ backer	.65	.70
Perforated panel	1-1/2", 6 lb. density fiberglass (by others)	.90	.95
Porforated panel	2" 0.75 lb fiboralass in polybag (by others)	OE .	00

PANELS

EDGE DETAILS

ACOUSTICS

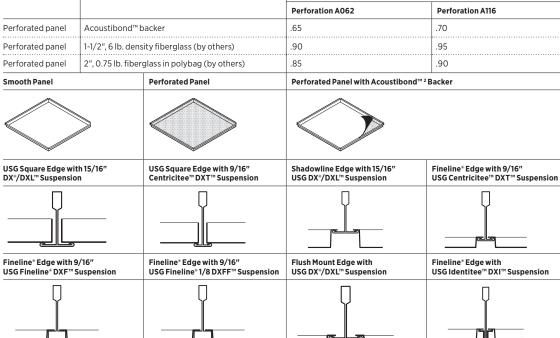

Online tools usgdesignstudio.com

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

FOR MORE INFORMATION

Product literature System brochure: IC415 Data sheet: IC314

Light reflectanceFlat White: LR-.8 (less with perforations).

Recycled content

USG Panz* aluminum panels: up to 90% recycled content.

- **Notes**1. Requires perforation and Acoustibond™ backer.
- Acoustibond™ backer not standard with DiamondFlex™ panels.

Printed in U.S.A.

