

USG SANDRIFT™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

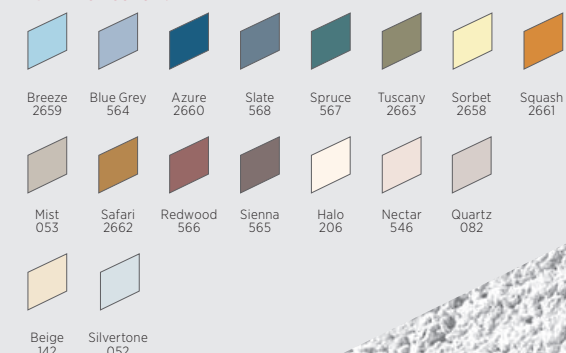
USG Sandrift™ Acoustical Panels
with ClimaPlus™ Superior
Performance/USG Donn® Brand
DX®/DXL™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM

STANDARD COLORS



ADVANTAGE COLORS



FEATURES AND BENEFITS

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year lifetime system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product.⁵
- Zero VOC emissions exceed CA Specification 01350.

APPLICATIONS

- Conference and lobby areas
- Department stores
- Entertainment and gaming
- Executive offices
- Restaurants

SUBSTRATE

- Cast mineral fiber

Fine-Textured Panel

USG SANDRIFT™ ACOUSTICAL PANELS
CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
usg.com | samplit@usg.com
fax: 888 874-2348

SEE LEED REPORT TOOL
for detailed sustainability
information, as well as the
MOST UP-TO-DATE
TECHNICAL SERVICES
800 USG.4YOU (874-4968)

TECHNICAL INFORMATION,
at usgdesignstudio.com

30

YEAR SYSTEM WARRANTY

• No Visible Sag
• Mold/Mildew Protection

10

YEAR AVAILABILITY





















806, 809


HRC


HIGH RECYCLED CONTENT





UL Classified






Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color ³	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
													
SL 	2'x2'x3/4" Paper-Back	Class A	808	.70	38	.83	White Standard Advantage	A	Zero			69%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	809	.70	38	.83	White Standard Advantage	B,C,D,E	Zero			69%	\$\$\$
SL 	2'x2'x3/4" Paper-Back		815	.55	35	.83	White	A	Zero			69%	\$\$\$

**Zero Emissions (VOC)**
Zero-emitting performance exceeds CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions). USG Certificate of Compliance for Zero VOC Emissions also available on usg.com.

**ClimaPlus™ Warranty Performance³**
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

**Firecode®**

A USG DX™/DXL™	B USG Centricitee™ DXT™	C USG Fineline® 1/8 DXFF™	D USG Fineline® DXF™	E USG Identitee™ DXI™
				

Product literature
Data sheet: SC1841

ASTM E1264 classification
Type III, Form 4, Pattern Z

ASTM E84 surface-burning characteristics
Class A
Flame spread: 25
Smoke developed: 50

Weight
1.60 lbs./sq. ft. (Class A)
1.75 lbs./sq. ft. (Firecode weight)

Thermal resistance
R-1.7 (Class A)
R-1.3 (Firecode)

Maximum backloading
See *USG 30-Year Limited Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes
1. For details, see LEED report tool at usgdesignstudio.com.
2. LR values are shown as averages.
3. To highlight the unique texture of USG Sandrift ClimaPlus panels, choose light colors. See Colors selector for more information.
4. For details, see *Ceiling Systems Limited Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).
5. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

USG SANDRIFT™ PANELS

USG SANDRIFT™
BASIC PANELS

GRID PROFILE OPTIONS

PHYSICAL DATA/
FOOTNOTES

