

TERRAZZO TILES & SLABS




Add excitement to your space with Daltile's American-made Terrazzo Collections. With five different Terrazzo Collections to choose from and an array of vibrant color options, there are endless possibilities to complement any design. Factory sealed with state-of-the-art PROADVANCED™ Protection sealer makes it ideal for floor, wall or countertop applications. The revolutionary PROADVANCED™ Protection technology helps repel common household stains. Illuminate a room with elegance and make a splendid statement with the versatile and durable tiles and slabs from the Terrazzo Collections.

Photo above features Terrazzo Atmosphere Socialite in Fine Grain brushed on the walls with Terrazzo Atmosphere Brilliance in Pearlized Grain polished on the vanity top.

Cover photo features Terrazzo Atmosphere Socialite in Fine Grain brushed on the walls with Terrazzo Atmosphere Brilliance in Pearlized Grain polished on the vanity top and tub face.

RECYCLED GLASS TERRAZZO

Field Tile CANCUN TZ44

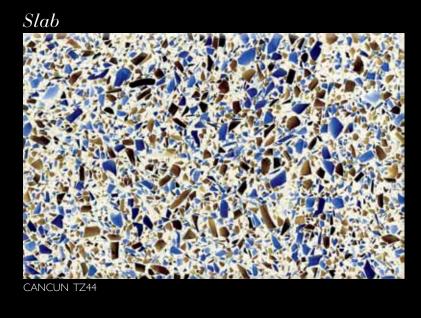



















Over 4.5 million pounds of recycled glass have gone into this product rather than American landfills to date. In addition to keeping the glass out of landfills, recycled glass makes our colorful concrete-based products sparkle. These "green" products can contribute toward the LEED certification of your project.

RIO TZ50

ATMOSPHERE TERRAZZO

Field Tile



ENVY TZ56 (Crystal Grain)



ENVY TZ56 (Crystal Grain)



SOCIALITE TZ67 (Crystal Grain)



SOCIALITE TZ67 (Fine Grain)



ANALYTICAL TZ53 (Crystal Grain)



ANALYTICAL TZ53 (Fine Grain)



ESSENCE TZ65* (Pearlized Grain)



BRILLIANCE TZ63* (Pearlized Grain)



RADIANCE TZ68* (Pearlized Grain)



AMBIENCE TZ54 (Crystal Grain)



TROPICAL TZ55 (Crystal Grain)



TROPICAL TZ55 (Fine Grain)



ENVY TZ56 (Fine Grain)



ECHELON TZ57 (Fine Grain)

^{*}The Pearlized Grain colors consist of actual Mother of Pearl chips. Color samples shown are representational only. Contact your local Daltile® representative for actual product samples prior to selection.





OPTIMISTIC TZ69 (Crystal Grain)



Over 4.5 million pounds of recycled glass have gone into this product rather than American landfills to date. In addition to keeping the glass out of landfills, recycled glass makes our colorful concrete-based products sparkle. These "green" products can contribute toward the LEFD certification of your project.

TRADITIONAL TERRAZZO



FLAX TZ23


Slab



FLAX TZ23




CRUSHED ICE TZ30



PARCHMENT TZ22



GINGER TZ29



SAGE TZ26




PINK CHAMPAGNE TZ36



JUTE TZ24



MORNING DOVE TZ25




CINNAMON TZ28




FRESH LIME TZ40







GREEN TEA TZ39




MINT JULEP TZ38




COTTAGE GREY TZ31




OYSTER SHELL TZ32




TURTLE DOVE TZ35



GRAPHITE TZ33




NIGHT OWL TZ34



PEPPERCORN TZ27

MICRO TERRAZZO

Field Tile



NEBULA TZ12



NEBULA TZ12



FULL MOON TZ10




COMET TZ13



STARDUST TZ14




SATURN'S RING TZ20



MERCURY RISING TZII




EARTH BOUND TZ19




STRATOSPHERE TZ21




GRAY MATTER TZ15



METEOR TZ18



ECLIPSE TZ16



BLACK OF NIGHT TZ17



RIVER RUN TERRAZZO

Field Tile







SLEEPY HOLLOW TZ51 DEEP WATERS TZ04



RECYCLED PORCELAIN & GLASS AGGREGATE

OUR CONTRIBUTION TO ENVIRONMENTAL STEWARDSHIP

Daltile Terrazzo tiles and slabs now incorporate recycled glass and porcelain, providing the opportunity to earn credits towards LEED™ certification. Using an innovative process, we are able to use recycled glass aggregate in all concrete and epoxy-based products. The glass aggregate percentage by weight/volume can be up to 56% in some products. In 2009, over 1.1 million pounds of recycled glass was used in manufacturing of this product. Besides the environmental benefit, recycled glass produces a beautiful appearance and allows for a wide variety of color choices.

Daltile can manufacture custom colors where the porcelain can be up to 100% direct replacement for aggregate providing a green product at a low cost. In addition, the amount of cement necessary for fabrication has been reduced by substituting a portion of the cement with fly ash, and utilize slag in manufacturing our concrete-based products when possible.

THE TERRAZZO COLLECTION MAKES IT EASY TO QUALIFY FOR LEED CREDITS:

- We use a variety of recycled materials in order to aid in reducing the amount of virgin material needed to manufacture our products. (MR Credit 4)
- Daltile purchases as many raw materials as possible within 500 miles of our Terrazzo manufacturing facility. (MR Credit 5)
- Our Terrazzo products contribute to reducing the quantity of indoor air contaminants that are odorous, irritating and/or harmful to the comfort and well being of installers and occupants (IEQ Credit 4.3).





MOLD-TO-SIZE CAPABILITIES

BREAK FREE FROM THE MOLD

To allow you even more design freedom, Daltile offers custom Mold-to-Size options. Mold-to-Size is the perfect way to get the custom size, color, sink and faucet holes, as well as, shapes and curves your design requires. Mold-to-Size options include:

- Mold-to-Size of any shape, including "curvy" shapes. Mold-to-Size can also include sink holes, faucet holes, edge treatments and a backsplash, if desired.
- The standard thickness for Mold-to-Size is 1-1/4" (3 cm). Tops can also be fabricated at 1" thick; however, this thickness requires a fiberglass scrim.
- Daltile's Mold-to-Size also allows for pouring large slabs as thin as 1/2" using epoxy. Slab size will determine if the top needs to increase in thickness. The color possibilities are limitless with epoxy.
- Mold-to-Size requires a template or a CAD file that is drawn to actual size. The template can be printed from the CAD file. Consult your Daltile representative for more information and details on Mold-to-Size options.





WATER JET CUTTING-EDGE TECHNOLOGY

Transform floors into works of art. Simple, yet amazingly effective; water-jet technology is the quickest, most efficient method of cutting tile to achieve the ultimate in design accuracy and eye appeal. Arcs, circles and other intricate designs can be cut using precise water-jet cutting techniques. The result is a unique installation that distinguishes the floor and the building from the ordinary.

HOW IT WORKS:

- Ultra-high water pressure cutting offers a powerful, yet precise cutting tool using ordinary water.
- The water is filtered, compressed and emitted at ultrasonic speed. The result is a jet stream that cuts cleanly, with no rough edges, giving perfect registration from tile to tile.
- · All cutting is controlled through a CAD/CAM system that directs each tile cut, registering precisely with those adjacent.
- Whether a radius or straight cut or an intricate in-lay pattern, tile is delivered to the job site cut and cataloged; ready for installation.



TERRAZZO TILES & SLABS

TILE SIZES

All sizes and colors are available in Polished, Honed or Brushed finishes and have chamfered edges.

		Thickness*	Sq. Ft. Per Carton	Weight Per Sq. Ft.
24 × 24 Field Tile	23-13/16" × 23-13/16" (60.48 cm × 60.48 cm)	7/8"	176 sq. ft. per pallet	11.25 lbs.
18 × 18 Field Tile	17-13/16" × 17-13/16" (45.24 cm × 45.24 cm)	5/8"	9	7.8 lbs.
16 × 16 Field Tile	15-13/16" × 15-13/16" (40.16 cm × 40.16 cm)	5/8"	8.9	7.8 lbs.
12 × 12 Field Tile	11-13/16" × 11-13/16" (30.0 cm × 30.0 cm)	1/2"	10	6.4 lbs.

All tiles are delivered factory-sealed with PROADVANCED™ Protection sealer.

Rectangular tile sizes of $6 \times 12, 8 \times 16, 9 \times 18$ and 12×24 are available via Special Order.

$\overline{\mathsf{SLAB}}\ \mathsf{SIZES} - \mathsf{All}$ slabs are available in Polished, Honed or Brushed finishes.

		Thickness	Weight Per Sq. Ft.
96 x 62 Slab	96" × 62" (243.84 cm × 157.48 cm)	I-I/4" (3 cm)	15.5 lbs.

All slabs are delivered factory-sealed with PROADVANCED™ Protection sealer. Slabs are available in standard format or cut-to-size.

RESIDENTIAL USAGE

F	W	С	EP	ED
FLOOR	WALL	COUNTERTOPS	EXTERIOR PATIOS*	EXTERIOR POOI DECKS*

^{*}Only Honed and Brushed finishes are suitable for exteriors in non-freezing climates when proper installation methods are followed. Terrazzo tile with glass aggregate cannot be used for exterior applications.

Exterior installations require the application of a UV sealer at the time of installation.

COMMERCIAL USAGE

		INTERIOR		EXT	RIOR
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL*	COMMERCIAL*
Floors/Patios*	/	~	~	/	~
Walls/Backsplashes	/	~	~	/	~
Countertops	/	/			
Vanities	/	✓			

^{*}Only Honed and Brushed finishes are suitable for exteriors in non-freezing climates when proper installation methods are followed. Terrazzo tile with glass aggregate cannot be used for exterior applications.

Exterior installations require the application of a UV sealer at the time of installation.

TRIM & ACCESSORIES

SIZES		TYPES		
6" × 24" 4" × 24" 6" × 18" 4" × 18"	Tile Base Bullnose &	Tile Base Beveled &	Tile Base Straight &	Outcorner*
6" X 16" 4" X 16" 6" X 12" 4" X 12"	Polished Edge*	Polished Edge*	Polished Edge*	
24" X 24" 18" X 18"	Stair Tread**	Transition**		
18 X 18 16" X 16" 12" X 12"				

INSTALLATION

GROUT JOINT RECOMMENDATION	SHADE VARIATION .
I/8" Minimum	MEDIUM (V2)

TEST RESULTS 🕹 *

	ASTM#	RESULT		
Water Absorption	C140	4.5%		
Compressive Strength	C140	8,000 psi Average		
Flexural Strength	C293	950 psi Average		
Coefficient of Friction	C1028	Polished Wet: ≥0.50 Dry: ≥0.70	Honed/Brushed Wet: ≥0.70 Dry: ≥0.70	
Wedging		< 1%		
Warping		Along any edge: +/- 1.5% Either diagonal: +/- 1.5%		

SLAB TEST RESULTS

	ASTM#	RESULT
Compressive Strength (Minimum)	C140	14,000 psi Average
Flexural Strength	C293	1,000 psi Average

NOTES

For more information on the PROADVANCED™ Protection Warranty, please visit www.daltilestone.com/proadvanced.

 $\hbox{\it Custom colors, sizes and thicknesses for tiles and slabs are available via Special Order. Please}$ contact your Daltile representative for more information.

For maintenance and resealing information, visit www.daltile.com.

Information on installation guidelines and official specifications are located at www.daltile.com.

Use of a latex-modified thin-set is recommended for tile installation.

For additional information refer to "Factors to Consider" at: www.daltile.com/ CommercialFactors.

st Thinner tile options are available via Special Order Please contact your Daltile representative for more information.

^{*} All Tile Bases are available in Polished or Honed finishes only Tile Base custom heights are available via Special Order

^{**} Stair Treads and Transition Tiles are available in the same sizes and finishes as field tile.

Water, oil, grease etc., create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

TERRAZZO TILES & SLABS



floor • wall • countertop





By their very design, Daltile products can help make it easier for you to earn LEED $^{\bowtie}$ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.









POST CONSUMER MADE IN RECYCLED MATERIALS THE U S A All items within this series are Made in the USA. For more information visit www.daltile.com/Terrazzo.









