DETAIL & SUBMITTAL SHEET

WALLS & CEILINGS



SPECIFICATIONS:

 $\textbf{Material:} \ \textbf{Extruded Aluminum.} \ \textbf{045 door and}$

surround trim

Door: Flush to edge of frame

Frame: 1 5/16" mitered aluminum extrusion flange with

1-1/2" deep mounting frame

Hinge: Doors with width 24" or less to have concealed pin hinge. Doors with width over 24" to have continuous aluminum piano hinge with exposed knuckle, set to open to 180°

Insulation: 3/4" polystyrene insulation, with 3.8 R-Value at $75^{\circ}\,\mathrm{F}$ mean temperature

Gasketing: [on all 4 sides] 1/8" X 3/8" closed cell neoprene gasketing [standard]

Latch: Screwdriver operated Spanner Head cam latch

Finish: Mill finish

OPTIONS (at additional cost)

☐ Long lock from Winlock

☐ Mortise lock


☐ Special sizes available




~	Item No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
	AL 4000	8 x 8	8 1/2 x 8 1/2	1	2
	AL 4000	10 x 10	10 1/2 x 10 1/2	1	3
	AL 4000	12 x 12	12 1/2 x 12 1/2	1	4
	AL 4000	14 x 14	14 1/2 x 14 1/2	1	5
	AL 4000	16 x 16	16 1/2 x 16 1/2	1	6
	AL 4000	18 x 18	18 1/2 x 18 1/2	1	7
	AL 4000	24 x 36*	24 1/2 x 36 1/2	1	12
	AL 4000	24 x 48*	24 1/2 x 48 1/2	2	16
	AL 4000	30 x 30*	30 1/2 x 30 1/2	2	12
	AL 4000	36 x 36*	36 1/2 x 36 1/2	2	16
	AL 4000	36 x 48*	36 1/2 x 48 1/2	2	21
	AL 4000	48 x 48* **	48 1/2 x 48 1/2	2	27
	AL 4000	60 x 48* **	60 1/2 x 48 1/2	2	34
	AL 4000	60 x 60* **	60 1/2 x 48 1/2	2	34
	AL 4000	72 x 48* **	72 1/2 x 48 1/2	2	40

^{*} Specials



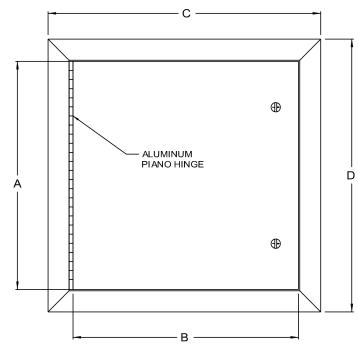

SECTION DETAIL



This lightweight all aluminum access door is ideal for exterior applications, and also those specific interior applications where corrosion or moisture is a concern. Access to large openings in walls and ceilings is made easy. The aluminum door panel is lined with 3/4" polystyrene insulation.

Project:		Date:		
Contractor:	Architect:			
Sizes:	Quantity:	Approval Initials:		



^{**}Double doors