



# PRODUCT SUBMITTAL

## Partition Top Anchor ( #1400 )

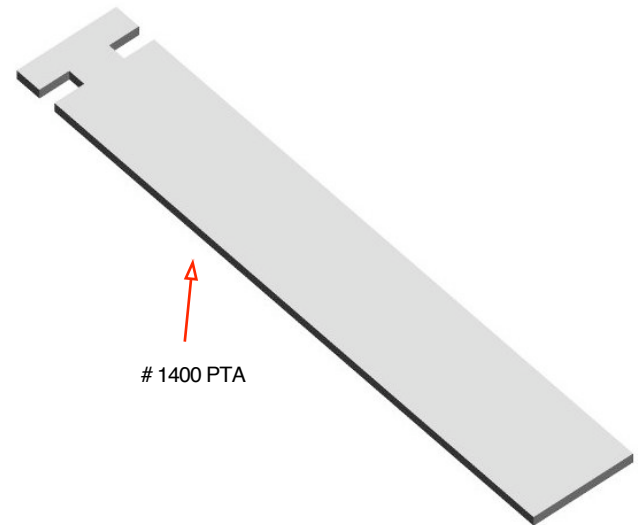

# 1400 PTA Sleeve with compressible filler

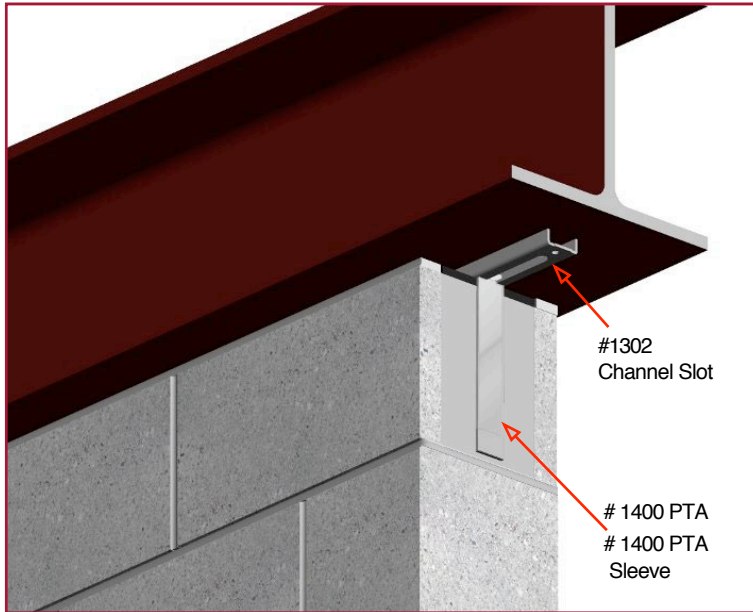

MATERIAL CONFORMANCE	SIZES / FINISHES
<b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b>  Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b>  Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b>  Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)  <b>SLEEVE:</b> Clear Butyrate <b>ASTM D542 , D148 , D696 , D257</b>	<b># 1400 PTA : 1-1/4" wide x 8" long</b>  <input type="checkbox"/> 16 gauge <input type="checkbox"/> 12 gauge  <b>FINISH:</b> <input type="checkbox"/> Mill Galvanized <input type="checkbox"/> Hot Dip Galvanized <input type="checkbox"/> Stainless Steel  <b>Recycle % Steel Products (flats):</b> Mill Galvanized & Hot Dip, 59.2% Post-Consumer 8.8% Post Industrial / Pre - Consumer Stainless Steel, 60%Post Consumer V O C Content -0%

**Corporate Office:** 400 Roundtree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113