


# intelligent design™

## cast in place replaceable

### the ultimate in tactile design

Twenty years of tactile design, testing and manufacturing insights have gone into Access Tile's superior engineered detectable warning product. Access Tile boasts the easiest and fastest installation in the industry requiring no concrete demolition and needing only a single fastening device. The replaceability feature of the tile is industry leading due to its simplicity and speed.

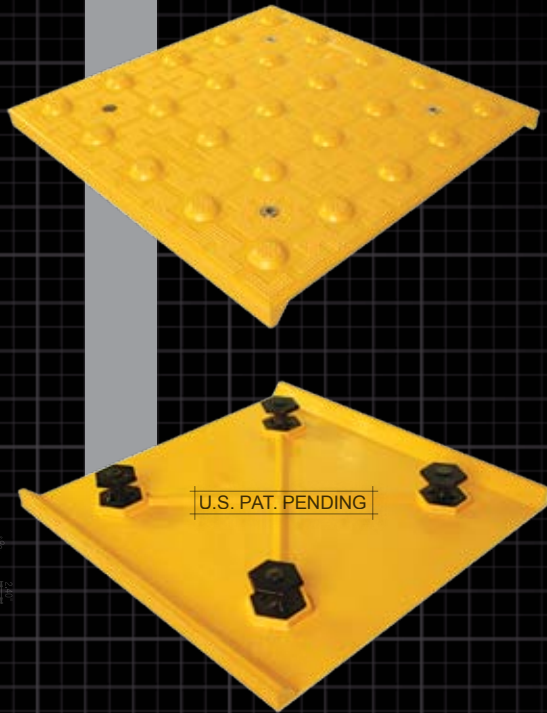

#### ADA COMPLIANCE

[www.accesstile.com/ada-compliance](http://www.accesstile.com/ada-compliance)


- 2.35" center-to-center, in-line dome spacing meets ADA Federal and State requirements
- Truncated dome size and spacing compliant with ADA Federal and State requirements, 0.9" base and 0.45" top diameter
- Fully complies with all ADA and OSHA requirements for surface height transitions to eliminate trip hazards
- Consistent dome spacing when tiles are adjoined (side-by-side or end-to-end)
- Wide in-line dome configuration facilitates a smooth rolling transition for strollers, wheelchairs and walkers

#### ASTM & UL TESTING

[www.accesstile.com/specifications](http://www.accesstile.com/specifications)

- Tensile Strength ASTM D 638
- Flexural Strength ASTM D 790
- Compressive Strength ASTM D 695
- Accelerated Weathering ASTM G 155
- Slip Resistance ASTM C 1028
- Flame Spread Index ASTM E 84
- Accelerated Aging (freeze thaw) D1037
- Linear Thermal Expansion ASTM D 696-03
- Tile Bond Strength ASTM C 1583

#### PRODUCT SIZES\*

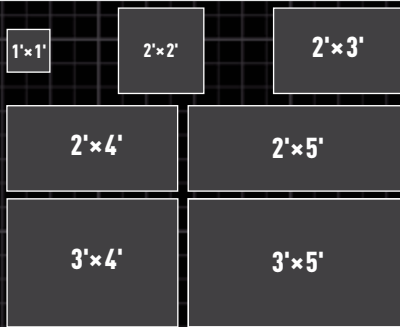

10" RADIUS CURVE

#### STANDARD COLORS\*



\* OTHER CUSTOM SIZES AND COLORS MAY BE AVAILABLE

#### INTELLIGENT DESIGN FEATURES

- Installs in minutes during concrete finishing stage
- The replaceability feature of the tile is industry leading due to its simplicity and speed
- Tamper-proof, stainless steel fastener maintains flush interface with walking surface
- Corrosion resistant hexagonal anchors designed to entrap concrete for optimal anchoring
- Anchor and fastener material compositions allow for reliable and secure installations when multiple replacements are necessary
- Large interface between tile and anchor seat area maximizes support at each fastener location
- Multiple fastener locations to ensure full anchoring of tactile surface
- Integral structural spine ensures stiffness and strength
- Tiles shipped with removable protective plastic film to provide a clean surface after installation
- Interactive sizes – all tiles maintain pattern repeat when mounted side-to-side or top-to-bottom

[www.accesstile.com](http://www.accesstile.com)

888-679-4022