

Lightweight Material

Customizable and Scalable System Footprint

High Strength and Stability

Simplistic Build Snaps Into Place

High Storage Capacity

Stackable Modules

ACO StormBrixx 900 SD


Geocellular Stormwater Storage Product for
Detention, Retention, Reuse, & Infiltration Systems

Highly Efficient, Robust Design

StormBrixx 900 SD system is a high-profile geocellular stormwater management system with an innovative design. This high storage capacity system reduces excavation and backfill requirements while maximizing water storage efficiency. Its unique pillar configuration and brick-bonding pattern ensure unparalleled stability and ease of maintenance access.


Typical Applications

- Restricted Footprint
- Green Infrastructure
- Pavement Subsurface
- Landscape Subsurface
- Compatible with StormBrixx 300 SD

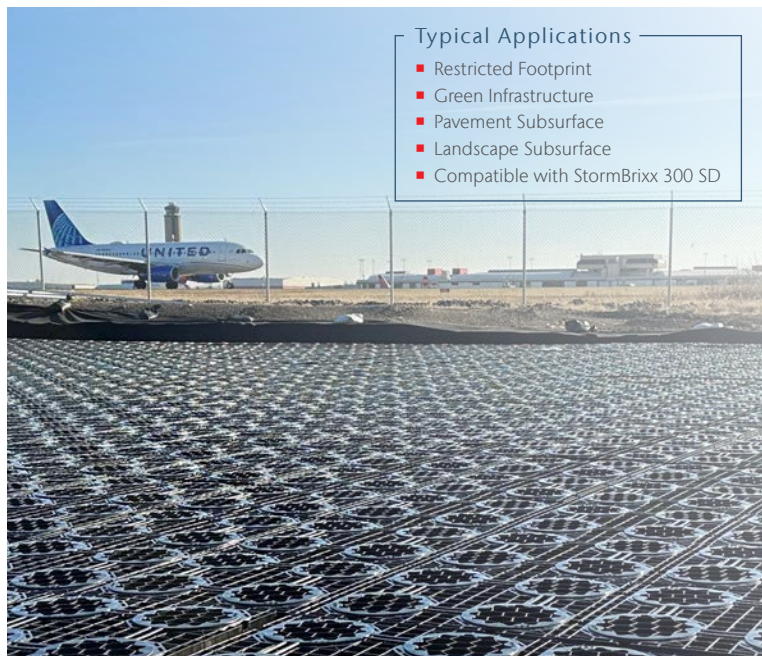

Versatile and Sustainable

The lightweight, stackable StormBrixx 900 SD offers a variety of assembly options to form an open, bonded structure. Each polypropylene component is designed for a quick, simple installation, which significantly cutting down project timelines.



Brick-bonding to form a StormBrixx Layer

Durability and Compliance

Manufactured in the USA, every component of StormBrixx 900 SD meets rigorous AASHTO HS-20 load conditions. This system provides a reliable and enduring stormwater management solution, aligning with sustainable infrastructure goals.

- Minimal product footprint for maximum stormwater runoff management
- Design life of 50 years

Convenient High-Profile Build

The extended height of StormBrixx 900 SD allows a tank to provide high-capacity stormwater storage with minimal product and straightforward inspection and maintenance.

Further benefits of StormBrixx 900 SD's unique design include:

- Easier to install and maintain alongside existing structures and utilities
- Compatible with the shorter StormBrixx 300 SD, allowing you to meet specific height requirements with minimal product


StormBrixx 900 SD Details

Half-Module Dimensions	47.24" (1200 mm) x 23.62" (600 mm) x 19.44" (494 mm)
Assembled Module Height	35.98" (914 mm)
Half-Module Weight	21.6 lbs (9.8 kg)
Max. Depth to Invert ¹	12.00' (3.66 m)
Full Module Void Ratio ²	96.5%
Full Module Volume ²	Net: 22.42 ft ³ (0.63 m ³), Gross: 23.24 ft ³ (0.66 m ³)
Number of Full Layers ³	1–3
Vertical Strength ⁴	50.8 psi (350 kPa)
Lateral Strength ⁴	10.2 psi (70 kPa)
Max. AASHTO Design Truck	HS-20
Max. Cover Depth ¹	6.50' (2.00 m)
Design Life	50 years


1. Ground improvements may be required. Groundwater is below the tank invert. Contact ACO for more information.
2. A Full Module is equal to two Half-Modules connected vertically (see drawing below).
3. The height of one layer is equal to the height of one Full Module. Please consult ACO for use with StormBrixx 300 SD modules and/or system heights greater than three layers.
4. Modules only (no backfill or top covers).

Half-Module 900 SD

part no. 138464

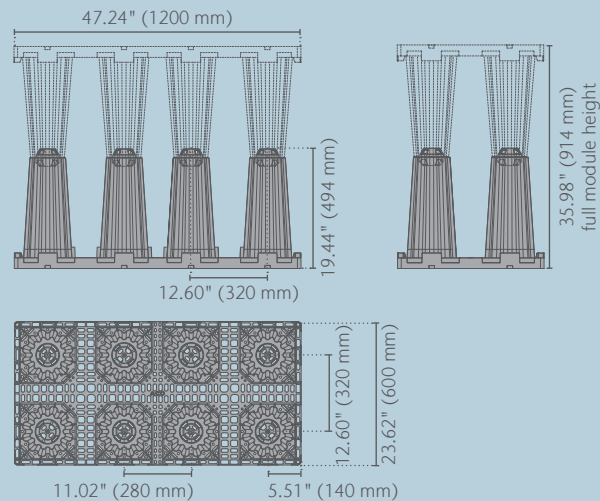

Other StormBrixx 900 SD Parts	Part No.
Side Panel	138463
Top Cover	140213
Layer Connector	314093
Half-Layer Side Panel	138567



ACO, Inc.

West Sales Office
825 W. Beechcraft St.
Casa Grande, AZ 85122
Tel: (520) 421-9988
info@acousa.com

Northeast Sales Office
9470 Pinecone Drive
Mentor, OH 44060
Tel: (440) 639-7230

Southeast Sales Office
481 Munn Rd. Ste 225
Fort Mill, SC 29715
Tel: (440) 639-7230

© April 2025 ACO, Inc.
All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to the change products and specifications without notice. Print SB_OV900SD_02

ACO. we care for water

