


# ACO Sport | System 2000

## Slot Channel Trench Drain System w/ Cellular Rubber Safety Edge




### One Meter Channel - (1000 mm)

part no. 00789

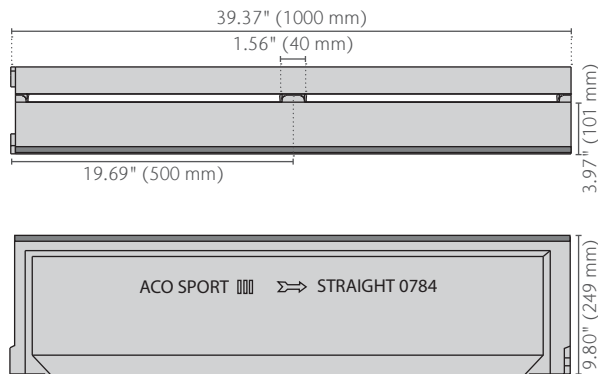


### Half Meter Channel - (500 mm)

part no. 00790

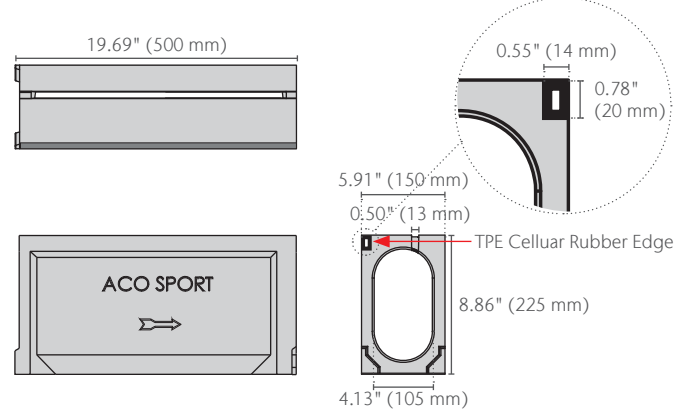

### In-Line Catch Basin

part no. 06567

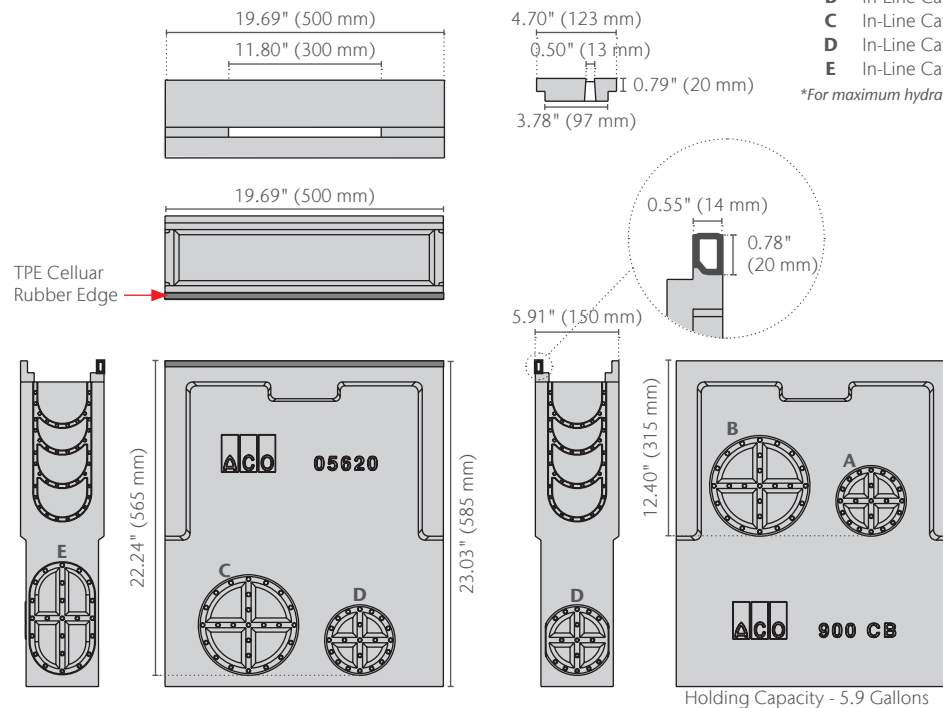

| Outlet Product                | Outlet Size (SCH 40) | Invert Depth | GPM | CFS  |
|-------------------------------|----------------------|--------------|-----|------|
| <b>A</b> In-Line Catch Basin* | 4" round             | 12.40        | 175 | 0.40 |
| <b>B</b> In-Line Catch Basin* | 6" round             | 12.40        | 379 | 0.87 |
| <b>C</b> In-Line Catch Basin* | 6" round             | 22.25        | 530 | 1.22 |
| <b>D</b> In-Line Catch Basin* | 4" round             | 22.24        | 242 | 0.54 |
| <b>E</b> In-Line Catch Basin* | 6" oval              | 22.24        | 372 | 0.86 |

\*For maximum hydraulic efficiency remove trash bucket from in-line catch basin

## ACO Sport | System 2000

## Slot Channel Trench Drain System w/ Cellular Rubber Safety Edge



| Product Name                                         | Part No.     | Invert Depth<br>in (mm) | Overall Depth<br>in (mm) | Weight<br>lbs |
|------------------------------------------------------|--------------|-------------------------|--------------------------|---------------|
| System 2000SE Straight channel - 39.37" (1000 mm)    | <b>00789</b> | 8.86 (225)              | 9.84 (250)               | 66.0          |
| System 2000SE Straight channel - 19.69" (500 mm)     | <b>00790</b> | 8.86 (225)              | 9.84 (250)               | 33.0          |
| Catch Basin                                          |              |                         |                          |               |
| System 2000SE In-Line Catch Basin - 19.69 (500 mm)   | <b>06567</b> | 22.13 (562)             | 23.03 (585)              | 57.0          |
| Polymer Concrete Catch Basin Cover - 19.69" (500 mm) | <b>00788</b> | -                       | -                        | 9.0           |
| Series 900 Plastic Trash Bucket                      | <b>01498</b> | -                       | -                        | 1.1           |
| 6" Oval to Round Adapter (to fit outlet E)           | <b>95140</b> | -                       | -                        | 1.1           |



For maximum hydraulic efficiency remove trash bucket from in-line catch basin

## Specification Summary

## Part I - General

**1.1 Related Work** - Work specified in other sections includes but is not limited to: Excavation and backfill, cast-in-place concrete, and mechanical equipment.

**1.2 System Description** - Modular trench drainage system manufactured from corrosion resistant polyester polymer concrete including interconnecting modular components.

**1.3 Submittals** - Manufacturer will submit, when required, shop drawings showing schematic plan of total drainage system listing all parts being provided with exact center-line dimensions suitable for installation. Copies of the manufacturer's recommended method of installation shall be submitted for review.

**1.4 Project History** - Manufacturer shall submit a list of installed projects, if required.

**1.5 Warranty** - ACO provides a limited product warranty of one year based on installation according to manufacturer's installation instruction data.

## Part II - Product

**2.1 Products** - Manufacturer shall be ACO, Inc.

**2.2 Physical & Mechanical Characteristics**

- Overall width - 5.91" (150 mm)
- Internal width - 4.13" (105 mm)
- Unit depth - 9.84" (250 mm)
- Unit length - 39.37" (1000 mm), or 19.69" (500 mm)
- Compressive strength - 14,000 psi
- Flexural strength - 4,000 psi
- Water absorption rate - <0.1% by weight.
- 0.5" (13 mm) inlet slot - ADA compliant to American Disabilities Act of 1990 Section 4.5.4
- TPE cellular rubber safety edge

**2.3 Channel Profile** - Each unit will feature a full radius in the trench bottom and male to female interconnecting ends. Units shall have horizontal cast-in anchoring features on outside walls to ensure maximum mechanical bond to surrounding bedding material. Each unit shall have a 0.5" (12.7 mm) longitudinal inlet slot on the top surface.

**2.4 Radius Channels** - Shall be manufactured to enable a radius of 36.5 meters, per IAAF guidelines.

**2.5 Catch Basins** - Shall be manufactured from polymer concrete, be one half meter (19.69") in length and include a trash bucket (optional) and removable polymer concrete cover.

## Part III - Installation

**3.1 Site Preparation** - Excavate an area wide enough and deep enough to accommodate the ACO SPORT System 2000 channel, allowing a minimum of 4" (100 mm) concrete encasement (recommended 4,000 psi) on 3 sides to provide support on both sides as well as beneath channel. Top of channel must be evenly aligned to the surface of the surrounding slab. See installation section for haunch details for different loadings & pavement materials.

**3.2 Installation** - Channel sections are installed from the outlet or catch basins. Insert channels from above to allow ends to interconnect. Channel sections shall be placed on brick, rebar basket, low slump concrete slurry, or with installation devices, to obtain correct finished elevation. Cutting will be made, if required, by masonry or concrete saw. Use tape or plastic to protect top surface of channel from concrete splash during concrete pour. Place concrete in a manner that will not dislodge the channels.

**3.3 Finishing and Clean-up** - Following final set of concrete, remove protection covering the top of channel and thoroughly flush system to remove debris.

**3.4** Install in strict accordance with manufacturer's recommendations and drawings. Details available at [www.ACOSport.us](http://www.ACOSport.us).




ADA-compliant per The Americans with Disabilities Act of 2010, Section 302.3

## ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



[info@acousa.com](mailto:info@acousa.com)  
[www.acousa.com](http://www.acousa.com)

