


F880 Galvanized Steel Bar Grate Spec Sheet



F880 Galvanized Steel Bar Grate

part no. 97452

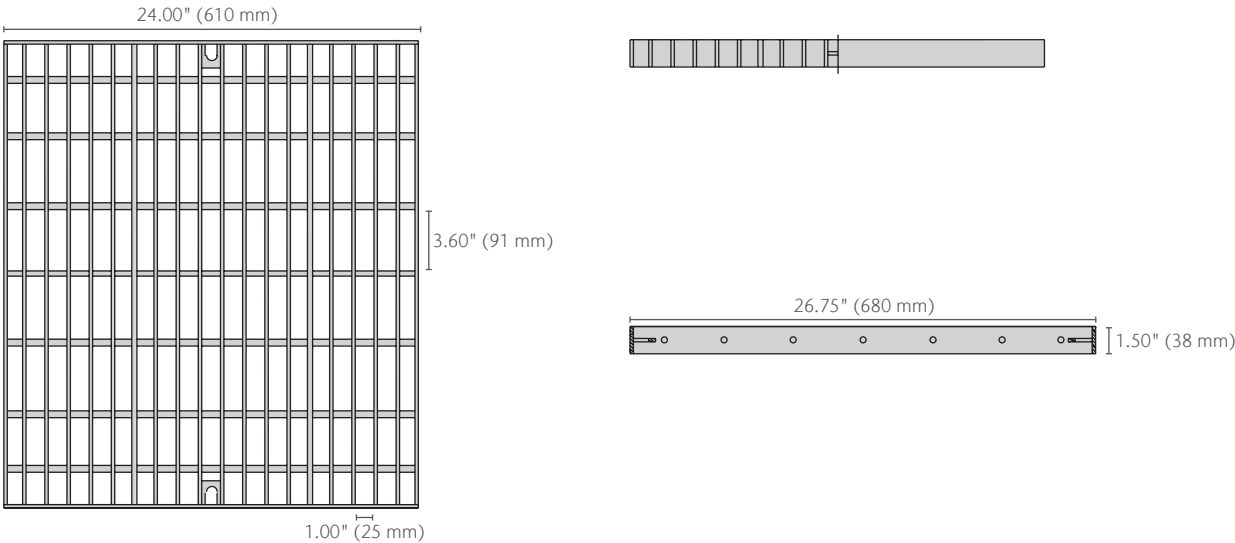

Product Name	Part No.	Length in(mm)	Width in(mm)	Weight lbs
F880 Galvanized Steel Bar Grate	97452	24.00 (610)	26.75 (680)	63.8
Replacement Galvanized Steel Socket Head Bolts (Qty 4)	93895	-	-	0.4

Specification Summary

General

The surface drainage system shall be ACO Drain F880 catch basin complete with ACO F880 Galvanized Steel Bar Grate with boltlocking as manufactured by ACO, Inc. or similar approved.

Grates

Grate is bar galvanized steel. Galvanized steel ASTM 536 - Grade 80-55-06. After removal of the grates there shall be uninterrupted access to the trench to aid maintenance.

Installation

The trench drain or catch basin system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Materials

The covers shall be manufactured from galvanized steeland have minimum properties as follows:

- Ductile iron to ASTM 536 - Grade 80-55-06.
- Intake area of 456.0 in² (2,941.9 cm²) per 24" of grate.

The overall width of 26.75" (680 mm) and overall length of 24.00" (610 mm). Slots measure 3.60" (91 mm) by 1.00" (25 mm).

F880 Galvanized Steel Bar Grate Spec Sheet



Specification Summary

General

The surface drainage system shall be ACO Drain F880 catch basin complete with ACO F880 Galvanized Steel Bar Grate with boltlocking as manufactured by ACO, Inc. or similar approved.

Grates

Grate is bar galvanized steel. Galvanized steel ASTM 536 - Grade 80-55-06. After removal of the grates there shall be uninterrupted access to the trench to aid maintenance.

Installation

The trench drain or catch basin system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Materials

The covers shall be manufactured from galvanized steel and have minimum properties as follows:

- Ductile iron to ASTM 536 - Grade 80-55-06.
- Intake area of 456.0 in² (2,941.9 cm²) per 24" of grate.

The overall width of 26.75" (680 mm) and overall length of 24.00" (610 mm). Slots measure 3.60" (91 mm) by 1.00" (25 mm).




EN 1433 Load Class C
56,202 lbs — 1,160 psi

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

