




### Product Features

- Certified to EN 1433 Load Class C - 56,000 lbs - 968 psi
- Supplied with four ½ -13 x 1½" socket head bolts to lock down grate
- Suitable for use with FG200
- Manufactured from 0.187" (5mm) thick galvanized steel bars

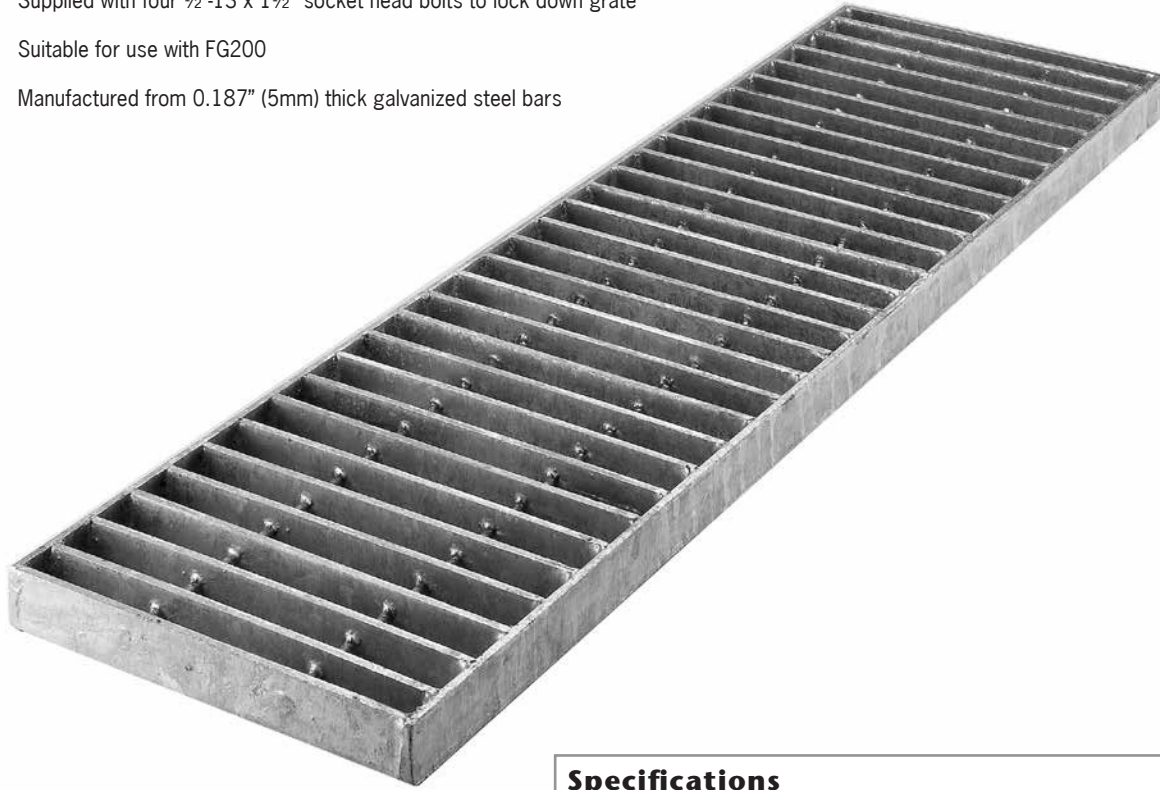

### Specifications

#### General

The surface drainage system shall be ACO Drain FG200 channels complete with ACO FG200 galvanized steel bar grate with bolt locking as manufactured by ACO Polymer Products, Inc. or similar approved.

#### Materials

The covers shall be manufactured from galvanized steel and have **minimum** properties as follows:

- **Independently certified to meet Load Class C to EN 1433 - 56,000 lbs - 968 psi**
- **Intake area of 264.0 sq. in. (1703.2 cm<sup>2</sup>) per 36" grate**

The overall width of 10.00" (254mm) and overall length of 36.00" (915mm). Slots measure 3.62" (92mm) by 1.0" (25mm) and 2.69" (68mm) by 1.0" (25mm).

#### Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.


# ACO DRAIN

## FG200 Bar galvanized steel grate




ACO Specification Information

**Plan view**

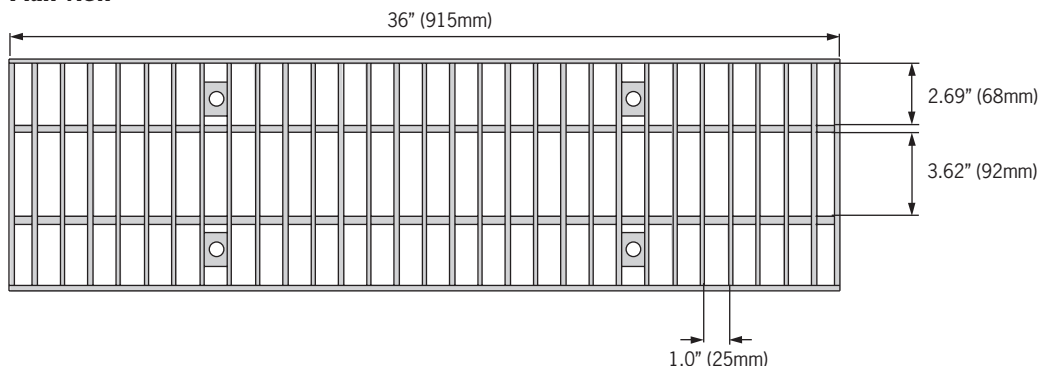

**Side elevation**



Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
FG200 Galvanized steel bar grate	<b>93899</b>	36.00 (915)	10.00 (254)	28.6
Replacement galvanized steel socket head bolts (Qty 4)	<b>93895</b>	-	-	0.4

**ACO Polymer Products, Inc.**

**Northeast Sales Office**

9470 Pinecone Dr.  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll free: (800) 543-4764  
Fax: (440) 639-7235

**West Sales Office**

825 W. Beechcraft St.  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll Free: (888) 490-9552  
Fax: (520) 421-9899

**Southeast Sales Office**

4211 Pleasant Road  
Fort Mill, SC 29708  
Toll free: (800) 543-4764  
Fax: (803) 802-1063

**Follow us on**



**Electronic Contact:**

info@ACODrain.us  
www.ACODrain.us



© March 2017 Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.