
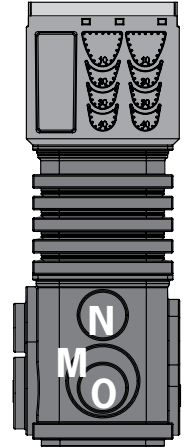
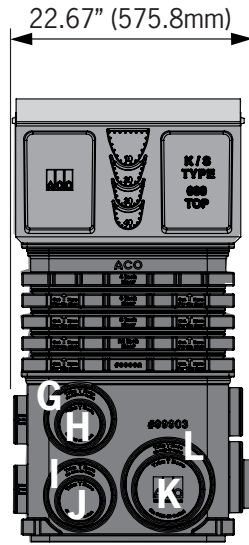
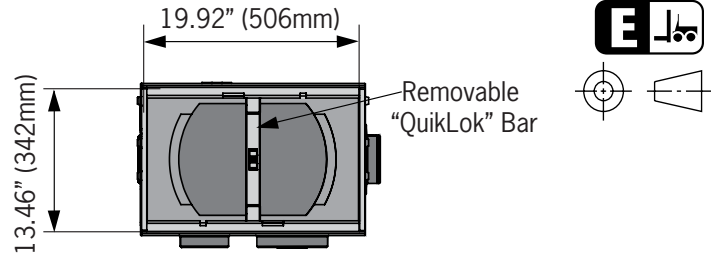


# K1-631G Catch Basin

## K1-631G Catch Basin

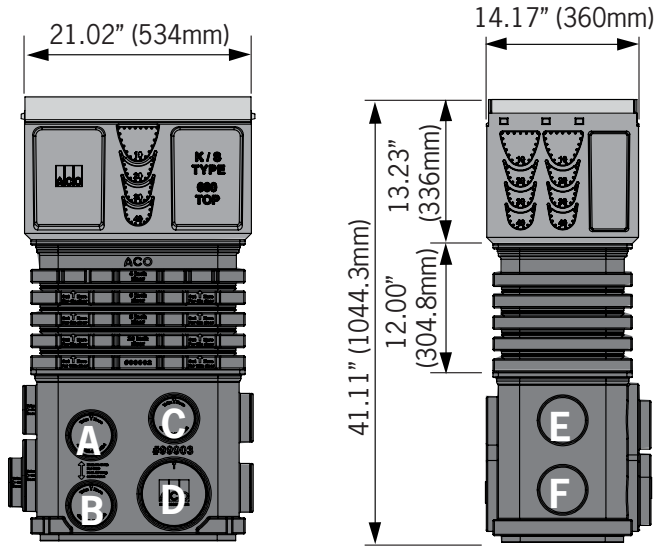


### Outlet flow rates

Outlet	Product	Outlet size (Sch. 40)	Invert Depth	GPM	CFS
A	Type K1-631G	4" round	33.29"	305	0.68
B	Type K1-631G	4" round	39.79"	335	0.75
C	Type K1-631G	4" round	31.72"	297	0.66
D	Type K1-631G	6" round	39.79"	743	1.66
E	Type K1-631G	4" round	31.84"	297	0.66
F	Type K1-631G	4" round	38.34"	328	0.73
G	Type K1-631G	6" round	32.62"	667	1.49
H	Type K1-631G	4" round	32.07"	299	0.67
I	Type K1-631G	6" round	39.76"	743	1.65
J	Type K1-631G	4" round	39.19"	332	0.74
K	Type K1-631G	6" round	39.19"	737	1.64
L	Type K1-631G	8" round	39.76"	1302	2.90
M	Type K1-631G	6" round	38.28"	728	1.62
N	Type K1-631G	4" round	31.15"	294	0.65
O	Type K1-631G	4" round	37.86"	326	0.73


**Note:**

- These are the pipe flow rates at the specified outlet, **NOT** channel flow rates.  
\*Flow rates without trash bucket - using trash bucket or filter bag reduces flow rates.
- 4" diameter foul air trap, part# 90854, can be fitted to catch basin base at outlet positions A/B and E/F

### Trash Bucket

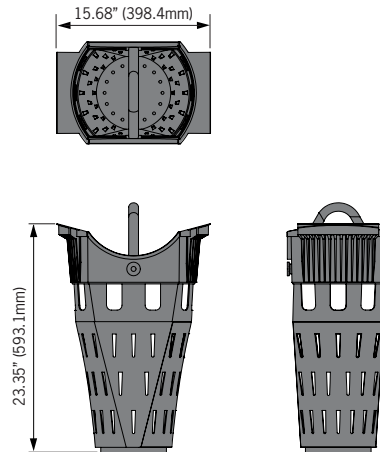

**Note:** Openings in trash bucket are 74.4"² (48,028mm²)

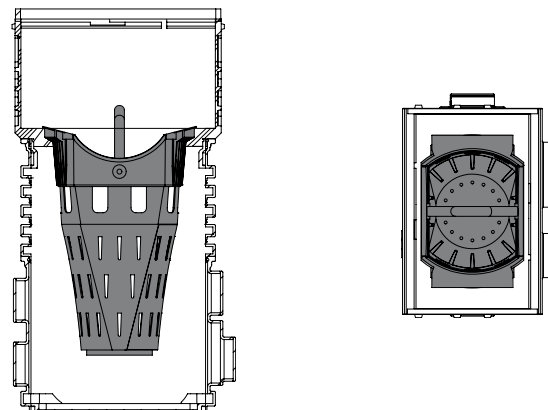

**Note:** Trash bucket position within K1-631G catch basin body and base

ACO Specification Information

# ACO DRAIN

## K1-631G Catch Basin



ACO Specification Information

Description	Part No.	Invert Depth		Weight lbs.
		inches	mm	
Type K1-631G Catch basin assembly - top, removable "QuickLok" bar, riser, trash bucket & base	<b>94631</b>	40.86	1038	55.8
<b>Catch Basin Components</b>				
Foul air trap - fits both Type 900 & Type 600 basins	<b>90854</b>	-	-	1.2
QuickLok grate removal tool	<b>01318</b>	-	-	0.3

Specifications			
<b>General</b>	The catch basin shall be ACO Drain K1-631G Catch Basin - comprising of top section, riser, trash bucket and base as manufactured by ACO, Inc. or similar approved.	Water absorption	0.07%
<b>Materials</b>	The top unit body shall be manufactured from polyester polymer concrete with minimum properties as follows:	Frost proof	YES
Compressive strength:	14,000 psi	Salt proof	YES
Flexural strength:	4,000 psi	Dilute acid and alkali resistant	YES
		The nominal clear opening shall be 13.46" (342mm) wide by 19.92" (506mm) long. Overall width of 22.70" (575.8mm) by 15.38" (390.6mm) long. Type K1-631G catch basin assembly has overall depth of 41.11" (1044.3mm). Polymer concrete top units shall incorporate a cast in galvanized steel frame manufactured with drillouts for channel connection and have a wall thickness of at least 0.59" (15mm). Top units shall have horizontal cast in anchoring key features on the outside to ensure maximum mechanical bond to the surrounding bedding material	
		and pavement surface. The base and riser unit shall be a LLDPE plastic molding and incorporate molded plastic pipe stubbs to facilitate pipe connection.	
		<b>Grates</b>	Grates shall be specified. See separate ACO Spec Info grate sheets for details. After removal of grates and "QuickLok" bar there shall be uninterrupted access to the catch basin to aid maintenance. Accepts all half-meter ACO K300 Drainlok grates or K300 Quicklok grates with optional QL bar.
		<b>Installation</b>	The trench drain/catch basin system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

**ACO, Inc.**  
**Northeast Sales Office**  
 9470 Pinecone Drive  
 Mentor, OH 44060  
 Tel: (440) 639-7230  
 Toll free: (800) 543-4764  
 Fax: (440) 639-7235

**West Sales Office**  
 825 W. Beechcraft St.  
 Casa Grande, AZ 85122  
 Tel: (520) 421-9988  
 Toll Free: (888) 490-9552  
 Fax: (520) 421-9899

**Southeast Sales Office**  
 4211 Pleasant Road  
 Fort Mill, SC 29708  
 Toll free: (800) 543-4764  
 Fax: (803) 802-1063

Follow us on  
  
**Electronic Contact:**  
 info@ACODrain.us  
 www.ACODrain.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.