

Product Features

- Certified to EN 1433 Load Class E - 135,000 lbs - 2,323 psi
- Uses 'PowerLok' boltless locking system
- Suitable for use with S200K and H200K channels
- Manufactured from ductile iron to ASTM A 536-84 - Grade 304 65-45-12
- Anti-Shunt lugs



ACO Specification Information

Specifications

General

The surface drainage system shall be ACO PowerDrain or SlabDrain, complete with ACO ductile iron longitudinal grate with 'PowerLok' locking as manufactured by ACO, Inc. or similar approved.

Materials

The covers shall be manufactured from ductile iron and have **minimum** properties as follows:

- **Independently certified to meet Load Class E to EN 1433 - 135,000 lbs - 2,323 psi**
- **Ductile iron to ASTM 536-84 - Grade 65-45-12**
- **Intake area of 395 sq. cm per ½ meter of grate**

The overall width of 9.35" (238mm) and overall length of 19.68" (500mm). Slots measure at a maximum of 1.36" (35mm).

Grate

Grate is longitudinal ductile iron. Ductile iron ASTM 536-84 - Grade 65-45-12. After removal of grates there shall be uninterrupted access to the trench to aid maintenance. Grates can be used for PowerDrain or SlabDrain.

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.


* delete as appropriate

ACO DRAIN


8" width - ductile iron longitudinal grate



Plan view

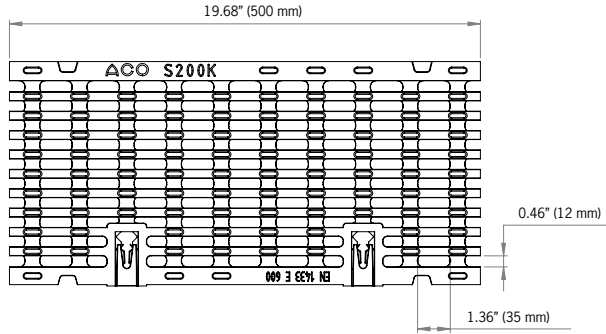


Side elevation

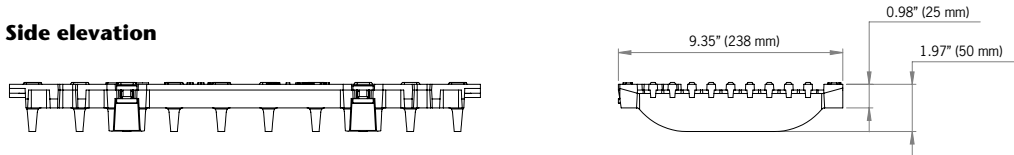

Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
PowerLok grate SK2 ductile iron longitudinal grate - CI E	72263	19.68 (500)	9.35 (238)	26.4

PowerLok locking mechanism

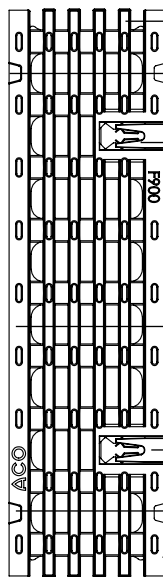

PowerLok Grate ACO **PowerLok** is a patented boltless locking system. Grates are removed and replaced with minimum time and effort for ease of maintenance.

Lug

PowerLok Device 'unlocked' position

PowerLok Rail

PowerLok Device 'locked' position

Recess in Grate

PowerLok Rail

Lugs on the rail opposite the **PowerLok** device slots into recesses in the grate. The **PowerLok** device is used to engage the lug on the rail at two locations per grate to 'lock' the grate to the channel.

ACO Specification Information

ACO, Inc.
Northeast Sales Office
 9470 Pinecone Drive
 Mentor, Ohio 44060
 Tel: (440) 639-7230
 Toll free: (800) 543-4764
 Fax: (440) 639-7235

West Sales Office
 825 W. Beechcraft St.
 Casa Grande, AZ 85122
 Tel: (520) 421-9988
 Toll Free: (888) 490-9552
 Fax: (520) 421-9899

Southeast Sales Office
 4211 Pleasant Road
 Fort Mill, SC 29708
 Toll free: (800) 543-4764
 Fax: (803) 802-1063

Follow us on



Electronic Contact:
 info@ACODrain.us
 www.ACODrain.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.