



TOP VIEW




AA SIDE VIEW


0.25" [6.35] DIAMETER VENT HOLES CENTERED BETWEEN EMBEDMENT RIBS TO ALLOW AIR TO ESCAPE FROM CAVITIES DURING INSTALLATION INTO UNCURED CONCRETE.

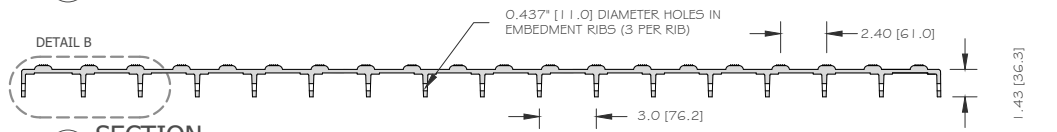


CC SECTION

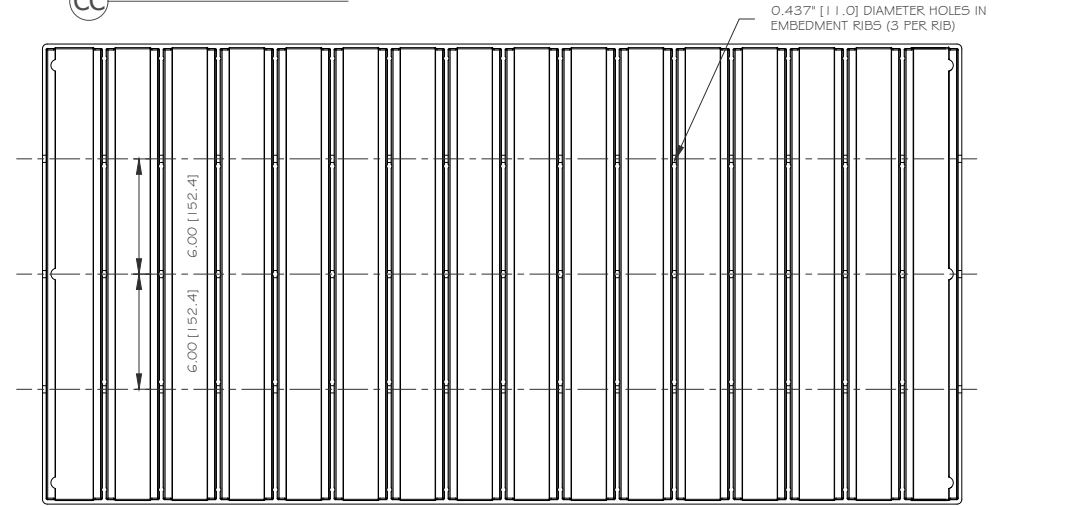


BOTTOM VIEW

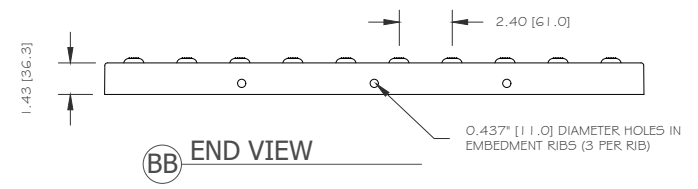

BB END VIEW

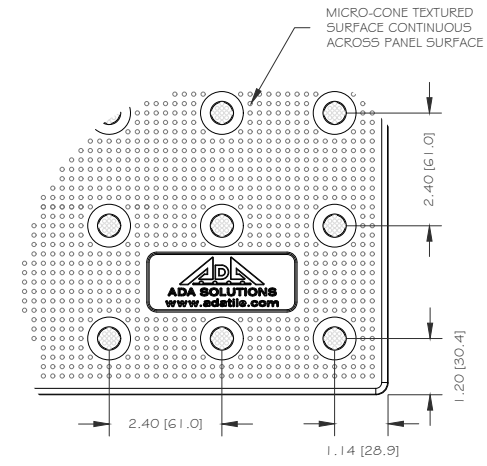

A DETAIL

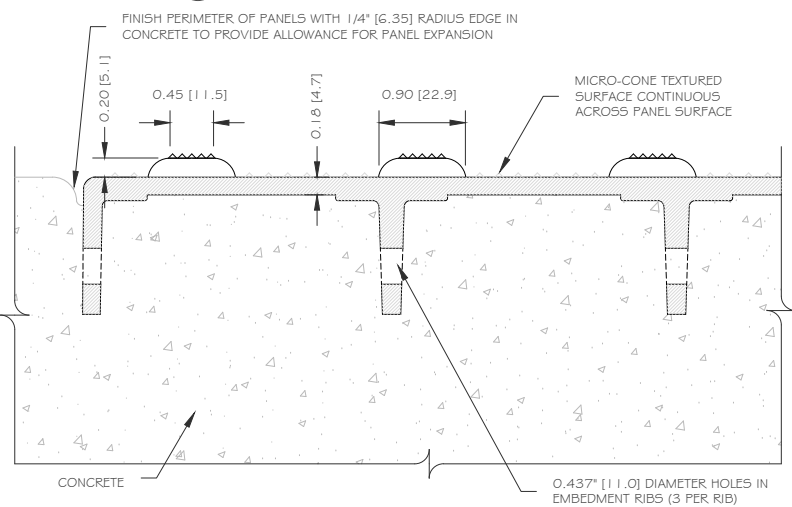


B DETAIL - INSTALLED IN CONCRETE

DETECTABLE WARNING SURFACE PANEL
Cast-In-Place Paver Panel 24" x 48"
 PART SIZE: 24" (609.6 MM) X 47.875" (1,216.0 MM)
 2.40" (60.96 MM) IN-LINE TRUNCATED DOME SPACING


DIVISION
TACTILE WALKING SURFACE INDICATORS
 MATERIAL
FIBERGLASS REINFORCED POLYMER COMPOSITE SMC
 DRAWING NUMBER
ADA-PAVER-2448 Page 1 of 2
 DATE
2023-08-10
 DRAWING UNITS
INCHES [MM]

WEBSITE
ADATILE.COM
 PHONE
1-800-372-0519
 EMAIL
INFO@ADATILE.COM




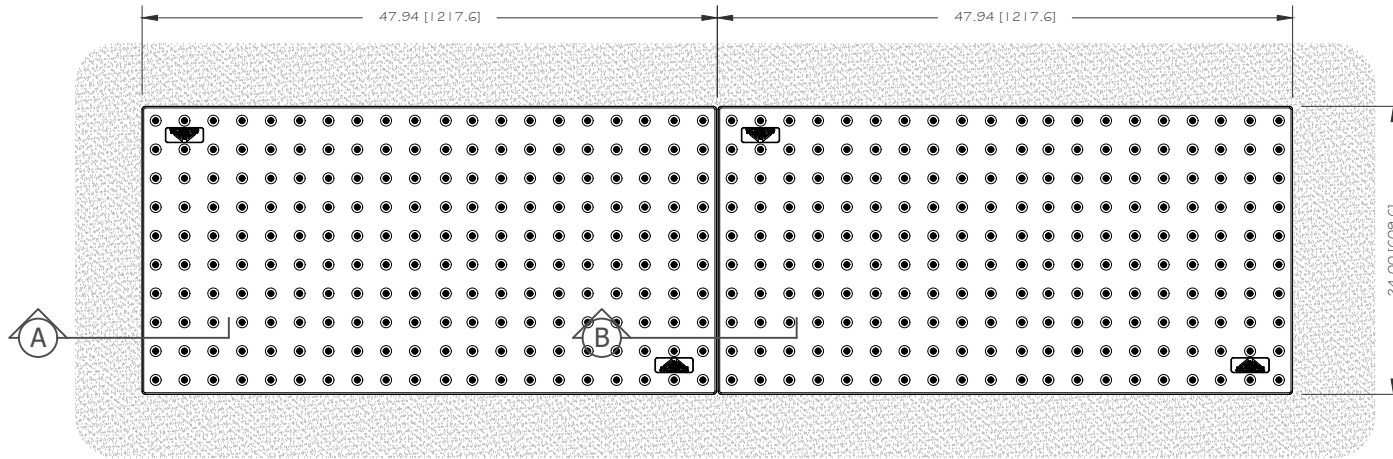

TOP VIEW - MULTIPLE PANEL INSTALLATION

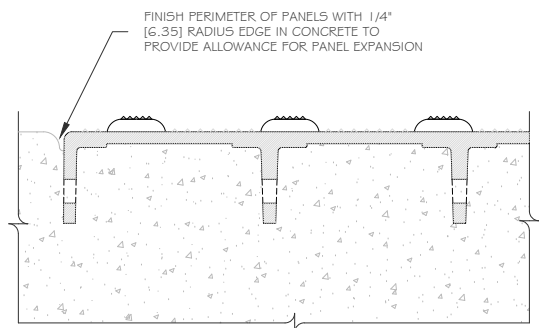

A PERIMETER EMBEDMENT DETAIL

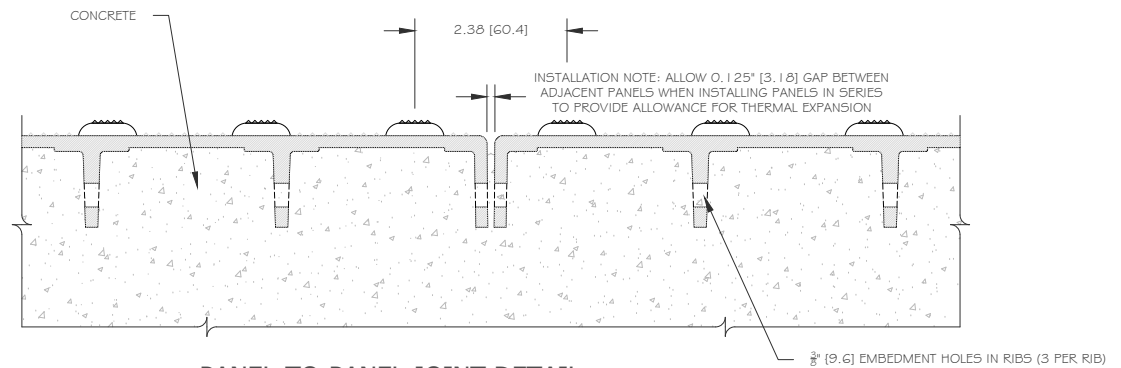

B PANEL-TO-PANEL JOINT DETAIL

DETECTABLE WARNING SURFACE PANEL
Cast-In-Place Paver Panel 24" x 48"
 PART SIZE: 24" (609.6 MM) X 47.875" (1,216.0 MM)
 2.40" (60.96 MM) IN-LINE TRUNCATED DOME SPACING

DIVISION
 TACTILE WALKING SURFACE INDICATORS

MATERIAL
 FIBERGLASS REINFORCED POLYMER COMPOSITE SMC

DRAWING NUMBER
 ADA-PAVER-2448 Page 2 of 2

DATE
 2023-08-10

DRAWING UNITS
 INCHES [MM]

WEBSITE
 ADATILE.COM

PHONE
 1-800-372-0519

EMAIL
 INFO@ADATILE.COM

