



TOP VIEW



AA SIDE VIEW


0.25" [6.35] DIAMETER VENT HOLES CENTERED BETWEEN EMBEDMENT RIBS TO ALLOW AIR TO ESCAPE FROM CAVITIES DURING INSTALLATION INTO UNCURED CONCRETE.

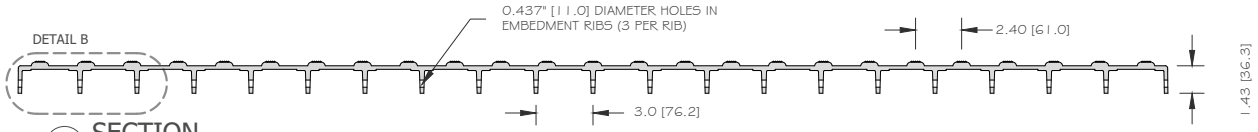


CC SECTION

0.437" [11.0] DIAMETER HOLES IN EMBEDMENT RIBS (3 PER RIB)

0.437" [11.0] DIAMETER HOLES IN EMBEDMENT RIBS (3 PER RIB)

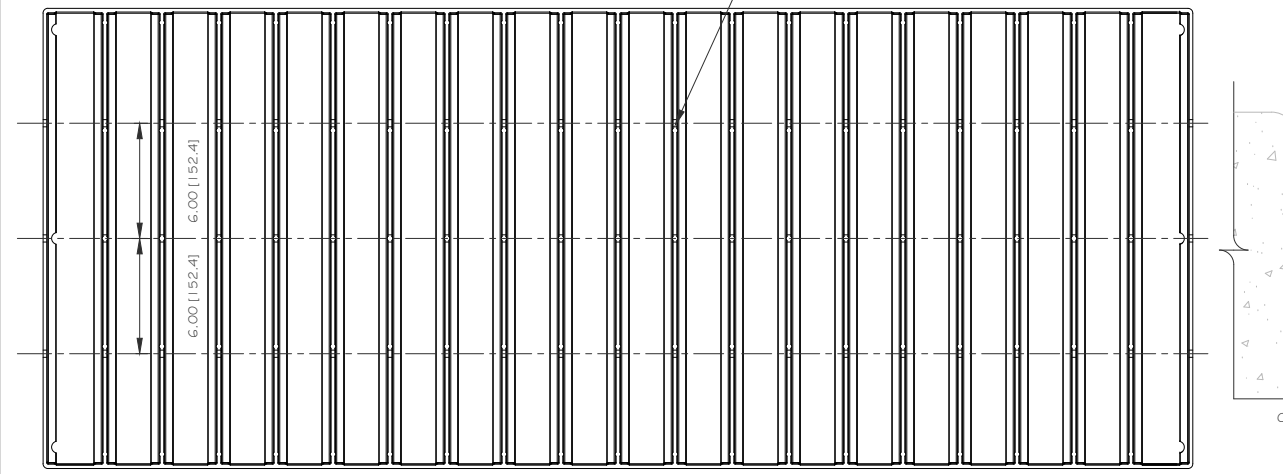


BOTTOM VIEW

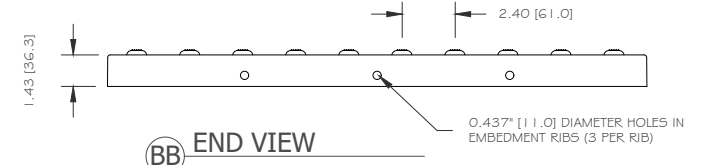


BB END VIEW

0.437" [11.0] DIAMETER HOLES IN EMBEDMENT RIBS (3 PER RIB)

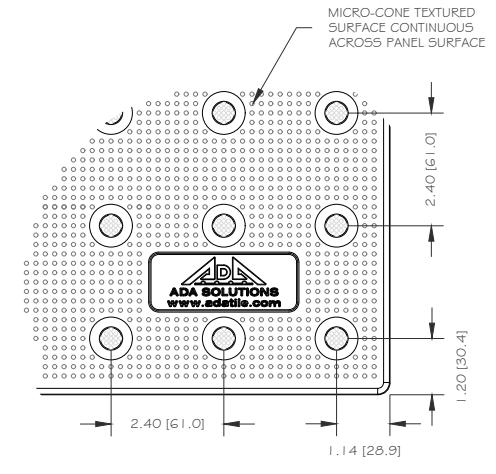

A DETAIL

MICRO-CONE TEXTURED SURFACE CONTINUOUS ACROSS PANEL SURFACE

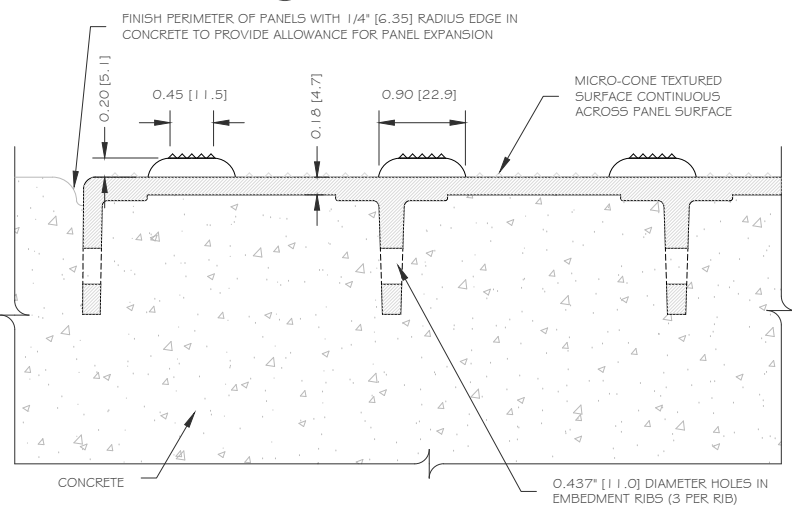

B DETAIL - INSTALLED IN CONCRETE

FINISH PERIMETER OF PANELS WITH 1/4" [6.35] RADIUS EDGE IN CONCRETE TO PROVIDE ALLOWANCE FOR PANEL EXPANSION

MICRO-CONE TEXTURED SURFACE CONTINUOUS ACROSS PANEL SURFACE


0.437" [11.0] DIAMETER HOLES IN EMBEDMENT RIBS (3 PER RIB)

DETECTABLE WARNING SURFACE PANEL
Cast-In-Place Paver Panel 24" x 60"
 PART SIZE: 24" (609.6 MM) X 59.875" (1,520.8 MM)
 2.40" (60.96 MM) IN-LINE TRUNCATED DOME SPACING


DIVISION
TACTILE WALKING SURFACE INDICATORS
 MATERIAL
FIBERGLASS REINFORCED POLYMER COMPOSITE SMC
 DRAWING NUMBER
ADA-PAVER-2460 Page 1 of 2
 DATE
2023-08-06
 DRAWING UNITS
INCHES [MM]

WEBSITE
ADATILE.COM
 PHONE
1-800-372-0519
 EMAIL
INFO@ADATILE.COM




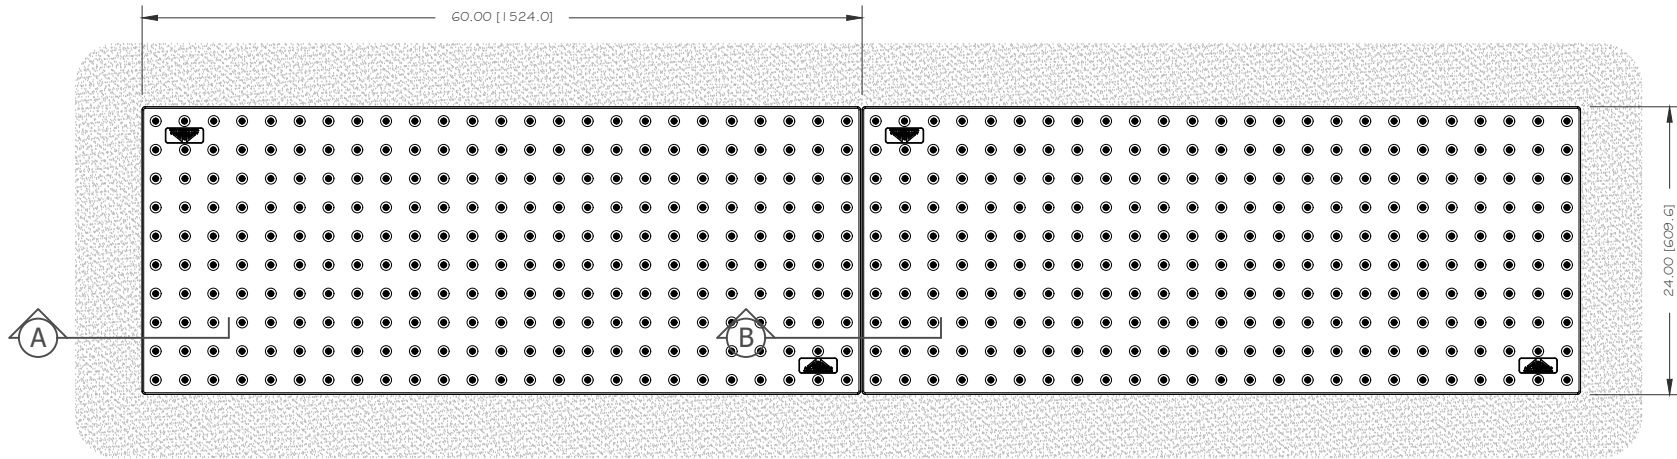

TOP VIEW - MULTIPLE PANEL INSTALLATION

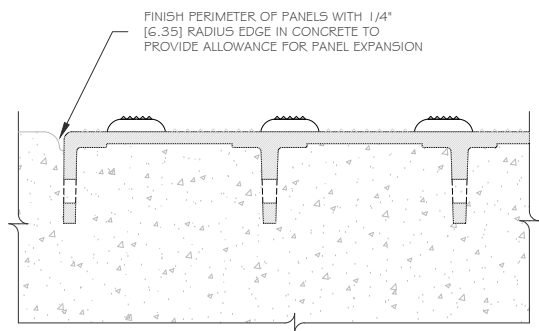

A PERIMETER EMBEDMENT DETAIL

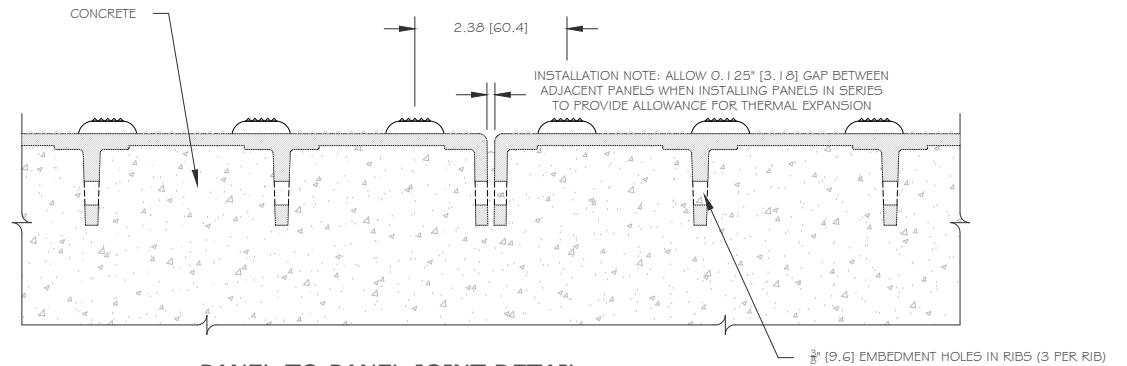

B PANEL-TO-PANEL JOINT DETAIL

DETECTABLE WARNING SURFACE PANEL
Cast-In-Place Paver Panel 24" x 60"
 PART SIZE: 24" (609.6 MM) X 59.875" (1,520.8 MM)
 2.40" (60.96 MM) IN-LINE TRUNCATED DOME SPACING

DIVISION
 TACTILE WALKING SURFACE INDICATORS

MATERIAL
 FIBERGLASS REINFORCED POLYMER COMPOSITE SMC

DRAWING NUMBER
 ADA-PAVER-2460 Page 2 of 2

DATE
 2023-08-06

DRAWING UNITS
 INCHES [MM]

WEBSITE
 ADATILE.COM

PHONE
 1-800-372-0519

EMAIL
 INFO@ADATILE.COM

