



Effects of Exposure to Water Prior to Pouring of Concrete

**Adeka Ultra Seal MC-2010M
Cetco Akwastop
Hydrotite CJ-1020-2K**

The following photographs are of the above waterstops that were soaked in water for 24 hours prior to pouring of concrete. The samples were completely dried at the time of photographing.

The purpose of this test is to simulate the effects 1 day of rainfall, or other exposure to water prior to the pouring of concrete, may have on the performance of each product.

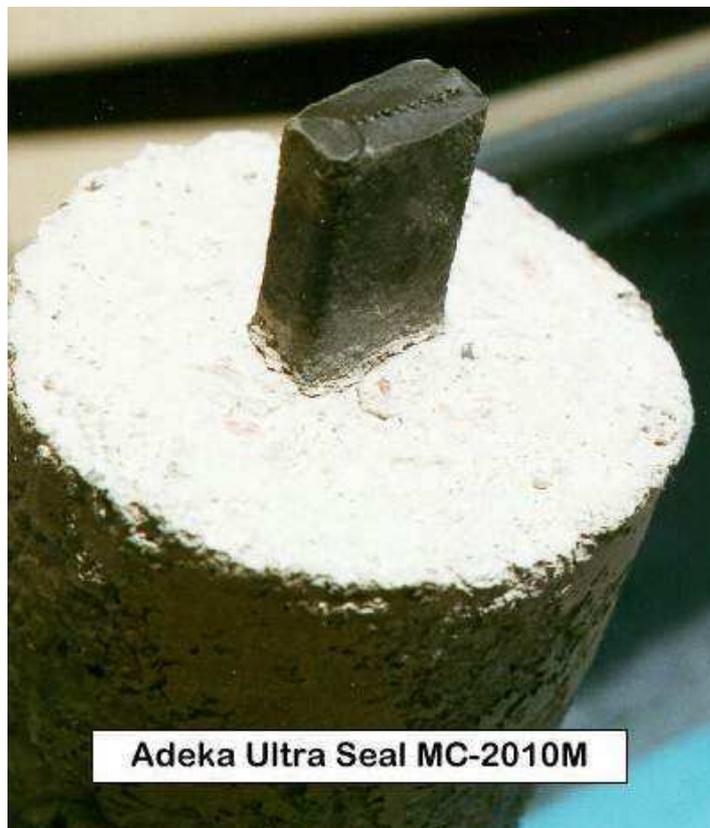

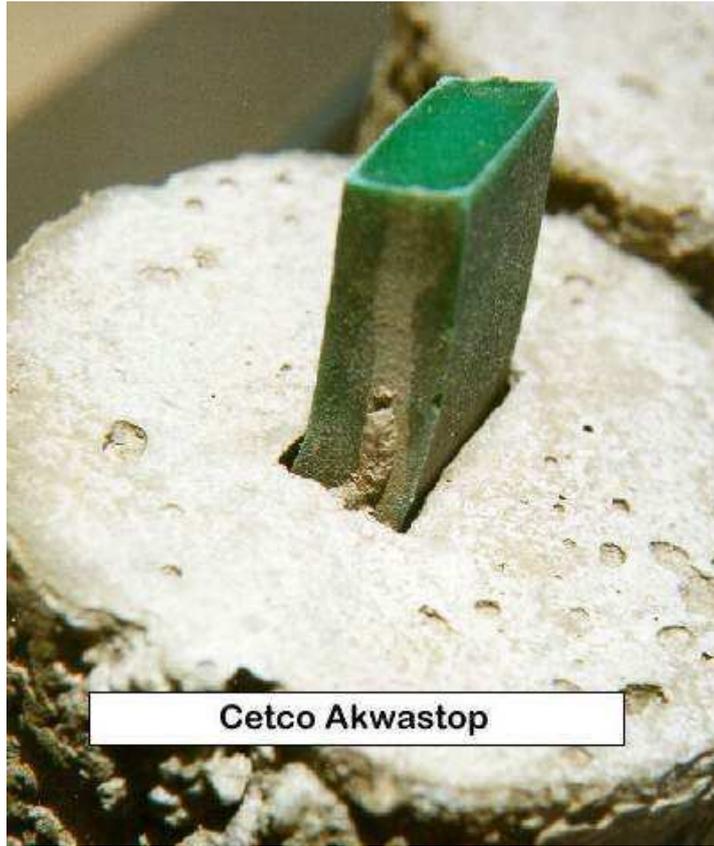

Cetco Akwastop



Hydrotite CJ-1020-2K

Adeka Ultra Seal USA
(800) 999-3959 | information@adeka.com