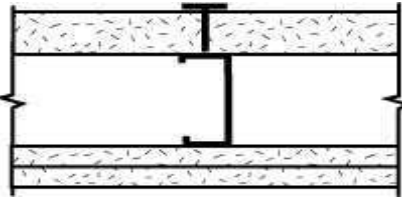
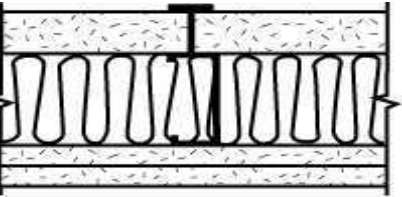
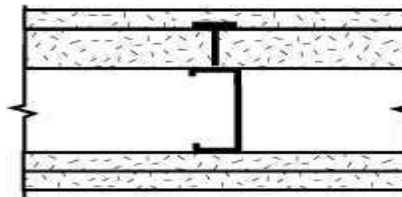
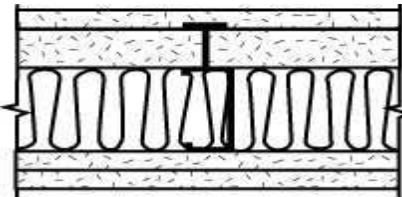
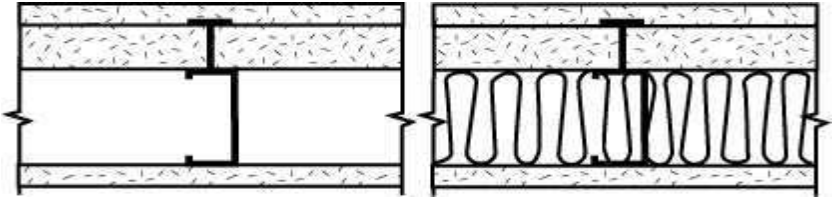


**SHAFT WALL ASSEMBLIES**

American Gypsum

Fire Rating	STC	GA No.	Description	
2 hour	50-54	WP 7051	<p><b>Shaft Side:</b> 1 layer of 1" x 24" shaft liner panel inserted between 2 1/2" floor and ceiling J runners with T section of 2 1/2" steel C-H and C-T studs between panels.</p> <p><b>Opposite Side:</b> 2 layers 1/2" FIREBLOC Type C gypsum wallboard applied parallel to studs.</p>	
FIRE		SOUND		
				

Fire Rating	STC	GA No.	Description	
2 hour	50-54	WP 7052	<p><b>Shaft Side:</b> 1 layer of 1" x 24" shaft liner panel inserted between 2 1/2" floor and ceiling J runners with T section of 2 1/2" steel C-H and C-T studs between panels. Face layer 1/2" FIREBLOC Type C applied parallel to studs</p> <p><b>Opposite Side:</b> 2 layers 1/2" FIREBLOC Type C gypsum wallboard applied parallel to C-H and C-T studs.</p>	
FIRE		SOUND		
				

Fire Rating	STC	GA No.	Description
2 hour	50-54	WP 7084	<b>Shaft Side:</b> 1 layer of 1"x 24" shaft liner panel inserted between 2 1/2" floor and ceiling J runners with T section of 2 1/2" steel C-H and C-T studs between panels. 1 layer 1/2" FIREBLOC Type C gypsum wallboard applied parallel.
FIRE		SOUND	
			<b>Opposite Side:</b> 1 layer of 1/2" FIREBLOC Type C gypsum wallboard applied parallel.