

#15 CONTROL JOINT Stainless Steel Grade 304 Expanded Metal VV or M Type Control Joint

FOR STUCCO AND PLASTER INSTALLATIONS

This control joint provides for the basic expansion and contraction that can be expected in the stucco membrane, such as initial shrinkage during stucco curing, and minor thermal expansion and contraction.



Submitted Product	Product Number	Ground
	#15	3/4"
additional Grounds available upon request		
Standard Package Lengths are 10-ft.		

Control Joints are designed to deal with initial stucco shrinkage and minor thermal movement.

DESCRIPTION

One piece expanded metal Control joints with an overall width of 4-inches. This control joint can be orientated and installed in a wall in both the vertical and horizontal direction.

Stainless steel lath and accessories can be used with various substrates: sheathing, CMU, cast-in-place
Longer life than Galvanized Steel and Zinc Alloy –
Maximum Corrosion Protection

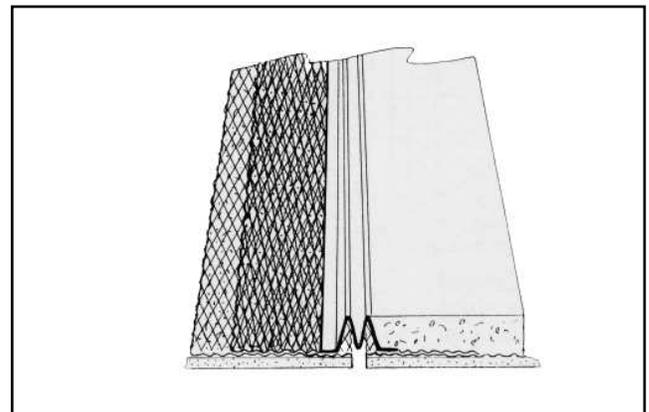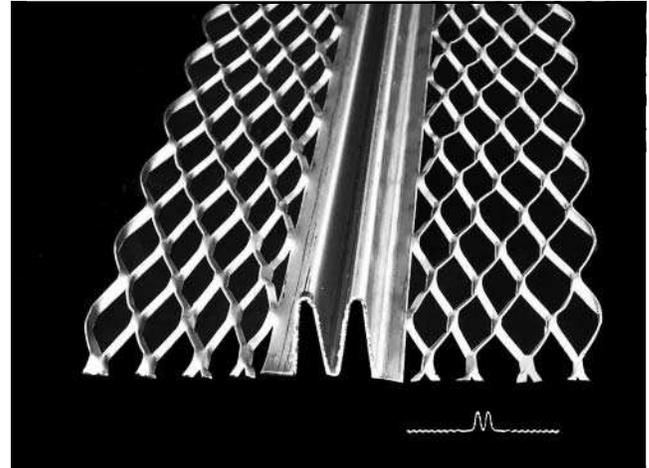

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath.

ASTM and most codes require hot dipped galvanized lath for all exterior applications. Stainless steel lath and accessories provides longer life and more resistance to corrosive environments.

Made in the United States of America

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527
email fmayer@gibraltar1.com

