

## #15 EXPANSION JOINT Zinc Alloy Expanded Metal VV or M Type Expansion Joint

FOR STUCCO AND PLASTER INSTALLATIONS  
These expansion joints provide for the basic expansion and contraction that can be expected in the stucco membrane, such as initial shrinkage during stucco curing, and minor thermal expansion and contraction.

Submitted Product	Product Number	Ground
	#15	3/8"
	#15	1/2"
	#15	5/8"
	#15	3/4"
	#15	7/8"
Standard Package Lengths are 10-ft.		



Expansion Joints are designed to deal with structural movement within a structure.

### DESCRIPTION

One piece expanded metal expansion joints with an overall width of 4-inches. This expansion joint can be orientated and installed in a wall in both the vertical and horizontal direction. Two and Three piece joints require extra caulking at the juncture of the pieces to avoid moisture problems. This one piece design eliminates the leaking issue.

### Materials

Zinc Alloy

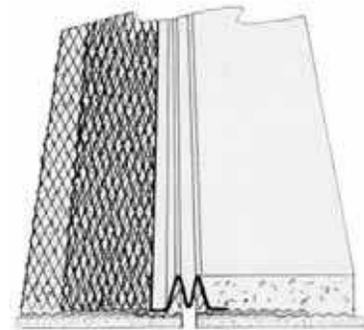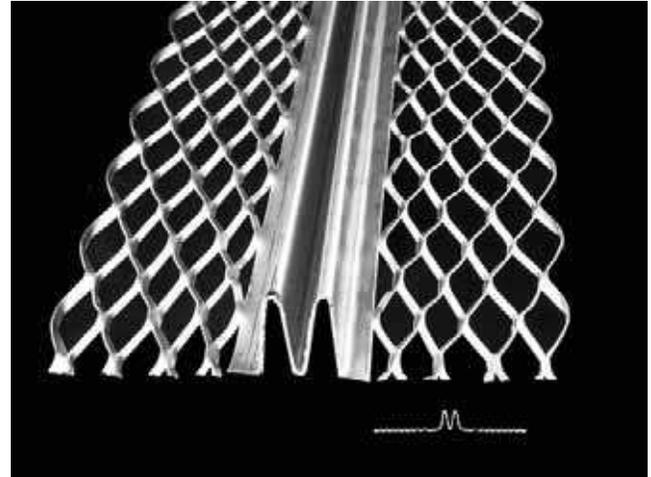

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath.

ASTM and most codes require hot dipped galvanized lath for all exterior applications.

Meets Buy American Procurement Requirements.  
Made in the United States of America

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

2014

