

### #15 CONTROL JOINT Galvanized Expanded Metal VV or M Type Control Joint

FOR STUCCO AND PLASTER INSTALLATIONS  
This control joint provides for the basic expansion and contraction that can be expected in the stucco membrane, such as initial shrinkage during stucco curing, and minor thermal expansion and contraction.

Submitted Product	Product Number	Ground
	#15	3/8"
	#15	1/2"
	#15	5/8"
	#15	3/4"
	#15	7/8"
Standard Package Lengths are 10-ft.		

Control Joints are designed to deal with initial stucco shrinkage and minor thermal movement.



#### DESCRIPTION

One piece expanded metal control joints with an overall width of 4-inches. This control joint can be orientated and installed in a wall in both the vertical and horizontal direction.

#### MATERIALS

G60 hot dip galvanized sheet steel to ASTM A653 with a minimum thickness 0.0172-inch prior to galvanizing as required by ASTM C1063 and C1861.

AMICO RECOMMENDS THE USE OF ACCESSORIES MADE FROM ZINC ALLOY, PVC AND OR STAINLESS STEEL MATERIALS FOR ALL EXTERIOR APPLICATIONS.

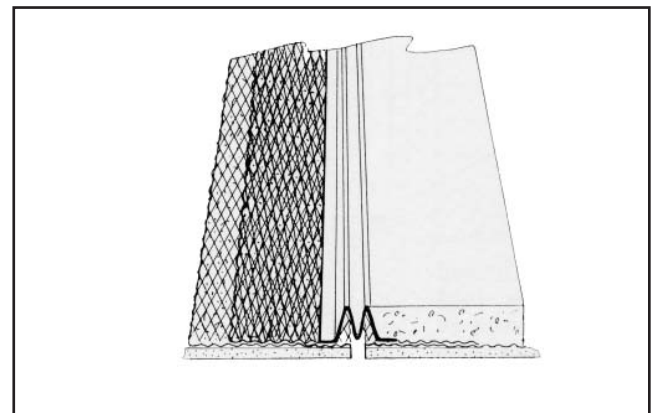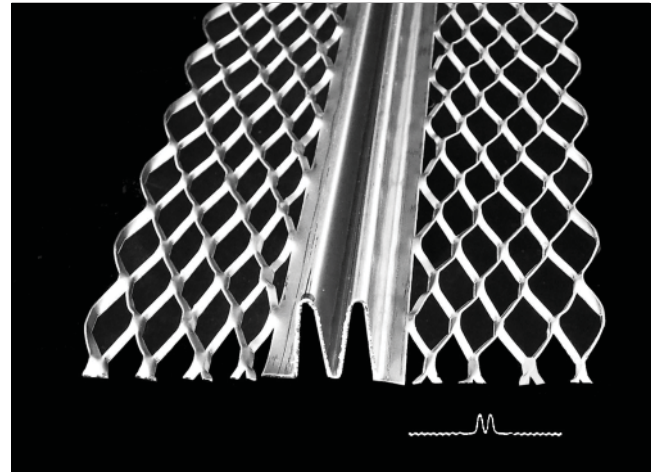

#### COMPLIANCE CRITERIA

Compliant with the following:  
International Building Code - (IBC)  
International Residential Code - (IRC)  
Florida Building Code (FBC) Building  
Florida Building Code (FBC) Residential  
California Building Code (CBC)  
California Residential Code (CRC)

Made in the United States of America

LEED: both pre and post industrial recyclable content are available – contact the manufacturer.

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

#### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

