

GENUINE, PATENTED, MONEY SAVING



built-in quality control

THE PROPRIETARY PVC CASING BEAD WITH AN INTEGRATED FLEXIBLE JOINT SEAL OFFERED EXCLUSIVELY BY AMICO.


E-Z Bead® saves money with reduced labor and materials

E-Z Bead By Amico features the latest in dual extrusion technology. This versatile casing bead trims out fenestration and other cladding breaks in half the time of traditional methods. The Integrated expansion flange provides an even, gasketed surface that butts right up against the window or door creating a consistent caulk joint for sealant application, so you get a good joint every time. E-Z Bead by Amico also features Bond Breaker, an applied film ensuring two-point adhesion in the sealant joint. The two-point adhesion method reduces joint failures by allowing the sealant joint to move and flex with the opening as the structure settles through seasonal cycles.



The Flexible Strip Creates a Waterproof Seal & Uniform Caulk Joint

- Supplied in 10' lengths for EZ jobsite installation
- Save time and reduce waste with the 3/8" x 1/4" sealant joint
- Flexible seal and casing bead are simultaneously extruded creating a 1-piece construction that won't come apart
- ASTM C-794 Certification with multiple sealant manufacturers
- Featured in three integral colors to match window or door finishes



White



Tan



Grey

	Install Time	Labor Cost Per Window (13 Lineal Ft)	Labor Cost Per Ft.	Sealant Joint Depth	Sealant Joint Width	Sealant Cost Per Window	Sealant Cost Per Ft.	Sealant Yield (10.3 oz)	Labor & Sealant Cost Per Window	Cost for 25 Opening Structure*
E-Z Bead®	10	\$2.50	\$0.19	0.25"	0.375"	\$4.03	\$0.31	16 ft	\$6.53	\$97.95
Standard Bead	20	\$5.00	\$0.38	0.50" **	0.375" **	\$8.06	\$0.62	8 ft	\$13.06	\$195.90



*Based on windows only, 3' x 5', does not include exterior doors, sliders, garage doors etc. **If standard bead and backer rod are installed correctly

AMICOBP.COM ♦ 800.366.2642



Butt it... Nail It... Caulk It... and create uniform spacing around windows, door frames and soffits. It's that E-Z

- Butt E-Z Bead® against the window frame, door frame or any other dissimilar material, nail it in place,
- As soon as the stucco or stone is in place apply a bead of caulk over the spacing strip . . . its that E-Z!
- The installer of the Stucco or Stone can now caulk the job themselves

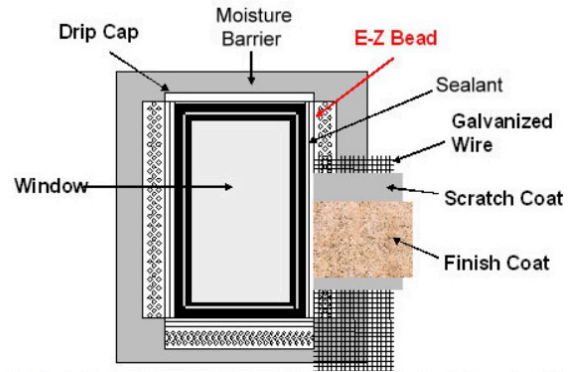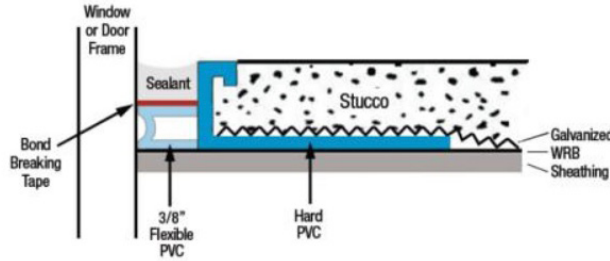

Tested and Approved

Substrate	Adhesion Test	Manufacturer	Sealant Products
E-Z Bead®	ASTM C-794	Pecora Corporation	864NST, 890NST, 895NST and 896 Silicones
E-Z Bead®	ASTM C-794	GE-Momentive Performance Materials	SilPruf NB-SCS-9000, LM-SCS-2700, SilGlaze II-SCS2800, SilPruf SCS2000 with SS4044P primer
E-Z Bead®	ASTM C-794	DAP	Side-Winder Advanced Polymer Sealant

E-Z Bead® has been tested and approved by Pecora Corp., GE, DAP and Dow Corning for use with their most popular construction sealants. When used in conjunction with E-Z Bead®, Pecora, GE, DAP and Dow Corning Sealants meet the requirements of ASTM C-794 Adhesion-in-Peel of Elastomeric Joint Sealants.



Bond Breaker Tape
Releases from the Flexible Strip After Caulking to Prevent Cracking & Joint Failure



E-Z Bead Allows for a Smooth, Thin Caulk Joint



Creates Uniform Spacing & a Smooth Transition Around Windows, Doors, Soffits & Corners



E-Z Bead Comes in White, Tan, or Grey

Place Your Order Now at:
AmicoEZBead.com

Product #	Ground	Flexible Expansion Flange
AM66-EZ-500	1/2"	3/8"
AM66-EZ-580	5/8"	3/8"
AM66-EZ-750	3/4"	3/8"
AM66-EZ-780	7/8"	3/8"
1 3/4" perforated nail flange height		
10' length, 50 to a box		



800-487-2511 • amicobp.com