


Aluminum Grating


DUO-GRIP™ EXTRUDED

A Duo-Grip™ grating panel consists of 6" wide planks of extruded aluminum, welded to each other to form panels. Panel ends have an

extruded aluminum end bar welded in place. Grating is available unpunched or punched in one of the standard patterns.

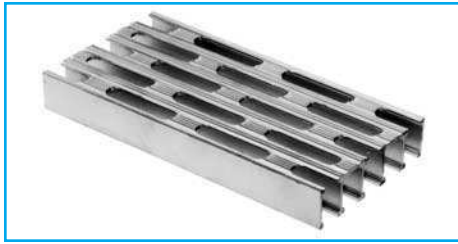

Rectangular Punched

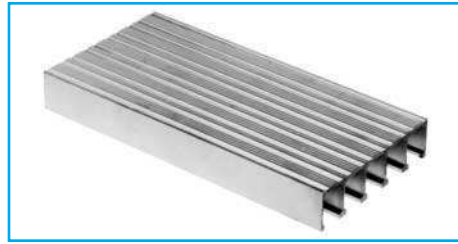

Unpunched



Square Punched

TABLE OF SAFE SPANS

Duo-Grip Depth	Symbol	Approx. Weight psf	Per Ft. Of Width Sec. Mod.	Mom. of Int.	SPAN																		
					2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	8'-0"	9'-0"						
3/4"	DG-075	2.5	0.261	0.136	U	435	278	193	142	109	86												
					D	0.115	0.180	0.259	0.353	0.461	0.583												
					C	435	348	290	249	218	193												
					D	0.092	0.144	0.207	0.282	0.368	0.466												
1"	DG-100	3.1	0.456	0.309	U	760	486	338	248	190	150	122											
					D	0.089	0.138	0.199	0.271	0.354	0.448	0.553											
					C	760	608	507	434	380	338	304											
					D	0.071	0.111	0.159	0.217	0.283	0.359	0.443	0.538	0.633									
1-1/4"	DG-125	3.6	0.748	0.597	U	1247	798	554	407	312	246	199	165	139									
					D	0.075	0.117	0.169	0.230	0.301	0.381	0.470	0.569	0.677									
					C	1247	997	831	712	623	554	499	453	416									
					D	0.060	0.094	0.135	0.184	0.241	0.304	0.376	0.455	0.541	0.627	0.713							
1-1/2"	DG-150	4.3	1.118	1.053	U	1863	1193	828	608	466	368	298	246	207	176								
					D	0.064	0.100	0.143	0.195	0.255	0.323	0.398	0.482	0.573	0.673	0.773							
					C	1863	1491	1242	1065	932	828	745	678	621	573								
					D	0.051	0.080	0.115	0.156	0.204	0.258	0.319	0.385	0.459	0.538	0.617	0.707						
1-3/4"	DG-175	4.6	1.434	1.553	U	2390	1530	1062	780	598	472	382	316	266	226	195							
					D	0.055	0.087	0.125	0.170	0.222	0.280	0.346	0.419	0.499	0.585	0.679							
					C	2390	1912	1593	1366	1195	1062	956	869	797	735	683							
					D	0.044	0.069	0.100	0.136	0.177	0.224	0.277	0.335	0.399	0.468	0.543	0.623	0.708					
2"	DG-200	5.3	2.078	2.461	U	3463	2217	1539	1131	866	684	554	458	385	328	283	216	171					
					D	0.051	0.079	0.114	0.155	0.203	0.256	0.317	0.383	0.456	0.535	0.621	0.711	0.811	0.926				
					C	3463	2771	2309	1979	1732	1539	1385	1259	1154	1066	990	926	866	811	770			
					D	0.041	0.063	0.091	0.124	0.162	0.205	0.253	0.307	0.365	0.428	0.496	0.568	0.648	0.737	0.831	0.931		
2-1/4"	DG-225	5.5	2.478	3.277	U	4130	2643	1836	1349	1033	816	661	546	459	391	337	258	204					
					D	0.045	0.071	0.102	0.139	0.181	0.230	0.284	0.343	0.408	0.479	0.556	0.642	0.736	0.839				
					C	4130	3304	2753	2360	2065	1836	1652	1502	1377	1271	1180	1103	1033	918				
					D	0.036	0.057	0.082	0.111	0.145	0.184	0.227	0.274	0.327	0.383	0.445	0.511	0.581	0.658	0.735			
2-1/2"	DG-250	5.7	2.901	4.232	U	4835	3094	2149	1579	1209	955	774	639	537	458	395	302	239					
					D	0.041	0.064	0.093	0.126	0.165	0.208	0.257	0.311	0.370	0.434	0.504	0.583	0.668	0.758				
					C	4835	3868	3223	2763	2418	2149	1934	1758	1612	1488	1381	1299	1209	1074				
					D	0.033	0.051	0.074	0.101	0.132	0.167	0.206	0.249	0.296	0.348	0.403	0.462	0.526	0.596	0.666			

U = safe uniform load, psf

C = safe concentrated load, pfw

D = deflection, inches

E = modulus of elasticity, 10,000,000 psi

F = fiber stress, 10,000 psi

Material: ASTM B-221—DUO-GRIP and banding shall be extruded aluminum alloy 6063-T6

Deflection: Spans and loads to the right of the bold line exceed 1/4" deflection for uniform load of 100 psf

which provides safe pedestrian comfort. These can be exceeded for other types of loads with engineer's approval.

General: Loads and deflections are theoretical and based on static loading.

Finish: Mill finish unless otherwise specified.