


METAL ACCESSORIES

X-66 EXPANDED FLANGE CASING BEAD

A 2-1/2" expanded mesh flange with a 1/4" return leg. This trim is used to terminate plaster or stucco around doors, windows or any other opening of the stucco mud when wet.

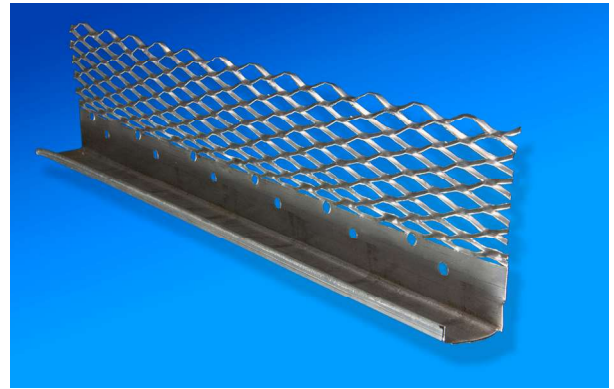


X-66, available with optional weep holes. These beads should not be used in lieu of an FHA-approved weep screed at base of wall to be in compliance with ASTM C1063.

Ground	Length	Finish	Pieces/ Carton	Weight/ carton	Cartons/ Pallet	Pallet Weight	Part #
3/8"	10'	Galvanized	30	44 lbs.	42	1848 lbs	CSBX66G3810
1/2"	10'	Galvanized	30	47 lbs.	42	1974 lbs	CSBX66G5010
1/2"	10'	Zinc	30	44 lbs.	42	1848 lbs	CSBX66Z5010
5/8"	10'	Galvanized	30	49 lbs.	42	2058 lbs	CSBX66G5810
5/8"	10'	Zinc	30	47 lbs.	42	1974 lbs	CSBX66Z5810
3/4"	10'	Galvanized	30	51 lbs.	42	2142 lbs	CSBX66G7510
3/4"	10'	Zinc	30	49 lbs.	42	2058 lbs	CSBX66Z7510
3/4"	10'	Stainless	30	71 lbs.	42	2982 lbs	CSBX66SE7510
7/8"	10'	Galvanized	30	53 lbs.	42	2226 lbs	CSBX66G7810
7/8"	10'	Zinc	30	51 lbs.	42	2142 lbs	CSBX66Z7810
1"	10'	Galvanized	30	56 lbs.	42	2352 lbs	CSBX66G10010
1-1/4"	10'	Galvanized	30	59 lbs.	42	2478 lbs	CSBX66G12510
1-1/2"	10'	Galvanized	30	76 lbs.	42	3192 lbs	CSBX66G15010

FOUNDATION WEEP SCREED (FHA #7)

Required at the base of walls as part of a drainage for exterior stucco or veneer stone applications. The 3-1/2" nailing flange serves as flashing when Grade D building paper or Tilath™ Starter Strip is installed over the flange. Holes are punched into the nailing flange for easy attachment to the wall. Holes are also placed on top of the "V" portion of the flange to provide keying of the stucco mud when wet.

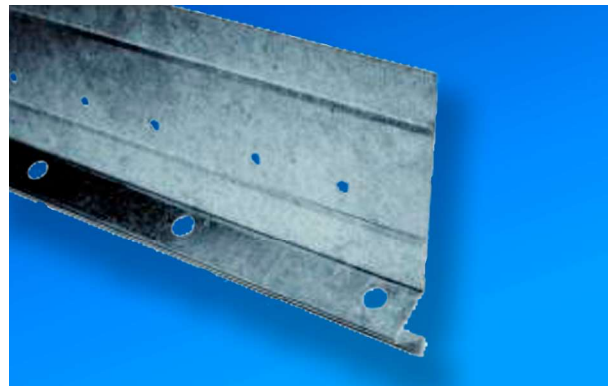

† Zinc Alloy available with a minimum quantity and additional lead time.

Ground	Finish	Nailing Flange Width	Pieces/ Box	Weight/ Box	Boxes/ Pallet	Part #
1/2"	Galvanized	3-1/2"	25	80 lbs.	25	FWS50350G2610
1/2"	Zinc†	3-1/2"	25	75 lbs.	25	FWS50350Z10
5/8"	Galvanized	3-1/2"	25	85 lbs.	25	FWS58350G2610
3/4"	Galvanized	3-1/2"	25	103 lbs.	25	FWS75350G2610
3/4"	Stainless	3-1/2"	25	90 lbs.	25	FWS75350SE2610
7/8"	Galvanized	3-1/2"	25	90 lbs.	25	FWS78350G2610
7/8"	Zinc†	3-1/2"	25	80 lbs.	25	FWS78350Z10

