

GALVANIZED WIRE ARCH CORNER BEADS

FOR STUCCO AND PLASTER INSTALLATIONS

Wire Corners allow a sharp plaster edge. They are man- ufactured from zinc coated wire me- chanically shaped to form the corners. They are available in four types:

Standard Straight, Arched, Bull Nose and Short Flange.

Product Submittal	Product Description	Ground Description
	Arch	2 1/2" x 2 1/2"
Standard Lengths are 8-Ft. and 9-Ft.		

FINISH

The finish on all AMICO wire corner stucco acces- sories are compatible with standard lathing and

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

REFERENCES


Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and acces- sories.

Meets Buy American Procurement Requirements

Made in the United States of America

LEED: 100% post industrial recyclable content

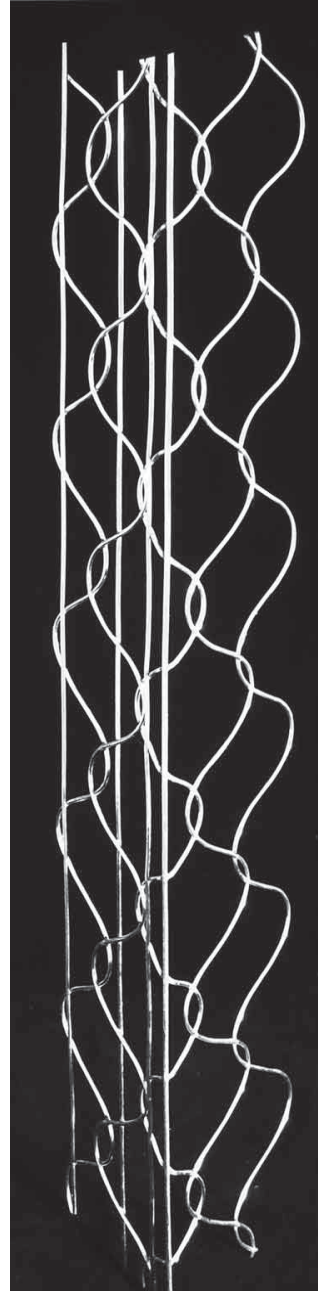

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

